

LINEARITY SPECIFICATIONS

| 9155D Option: | -875 | -875 + MAB ⁽¹⁾ | -830 / 831 |
|-----------------------------------|--------------------------------------|---|--------------------------------------|
| Maximum Amplitude | 20 g pk (196 m/s ² pk) | 500 g pk (4 900 m/s ² pk) | 40 g pk (392 m/s ² pk) |
| Uncertainty ^{(2) [3]} | 1.00% | TBD | 0.77% |
| Maximum # of Points | 20 | 20 | 20 |
| Maximum SUT Weight ⁽⁴⁾ | 35.3 oz (1 000 grams) | 3.0 oz (85 grams) | 9.5 oz (270 grams) |
| Frequency Range ⁽⁵⁾ | 100 – 10 000 Hz | 100 – 1 000 Hz | 100 – 15 000 / 20 000 Hz |

Optional Accessories

| | |
|-----------|---|
| 9155D-100 | 19" Rack Integration. Approx. 36.5 in H x 21.75 in W x 26 in D [93 cm x 55 cm x 66 cm]. Integrates components in 19" rack. |
| 9155D-120 | Shaker Mount. Provides wood pedestal to support calibration shaker. Requires user to fill with sand (not included). |
| 9155D-160 | Tool Kit. Includes torque wrench, screwdrivers, crescent wrenches, toolbox, etc. |
| 9155D-350 | Calibration Label Printing. Provides automatic calibration label printing using a Zebra thermal transfer label printer. |
| 9155D-400 | TEDS Sensor Support. Provides for automatic update of TEDS sensors. Requires 9155D-443 option. |
| 9155D-442 | Basic ICP Signal Conditioning. Adds signal conditioner for ICP and charge mode sensors. |
| 9155D-443 | Dual-mode Charge Amplifier. Computer control and automated switching between ICP and charge mode sensors. |
| 9155D-445 | Capacitive Sensor Signal Conditioning. Adds signal conditioner for capacitive sensors. |
| 9155D-478 | Piezoresistive Signal Conditioning. Adds support for piezoresistive sensors. Includes PCB 478A30 signal conditioner. |
| 9155D-525 | Shock Calibration. Provides for verification of shock accelerometers from 20 g to 10 000 g |
| 9155D-550 | Resonance Check. Provides for resonance check of accelerometers up to 50 kHz. |
| 9155D-575 | Laser Primary Calibration. Adds primary calibration capability as specified in ISO 16063-11. |
| 9155D-600 | Velocity Sensor Calibration. Allows calibration of velocity sensors. Reports data in velocity units. |
| 9155D-771 | Low Frequency (0.5 Hz – 500 Hz). Long stroke shaker with SmartStroke™ technology and accelerometer reference sensor. |
| 9155D-779 | Low Frequency (0.1 Hz – 500 Hz). Long stroke shaker with SmartStroke™ technology, accelerometer and optical reference sensors. |
| 9155D-830 | K394B30 Air Bearing Shaker. Adds precision air-bearing shaker 5 Hz – 15 kHz. |
| 9155D-831 | K394B31 Air Bearing Shaker. Adds precision high-frequency air-bearing shaker 5 Hz – 20 kHz. |
| 9155D-875 | High Payload Calibration Shaker. Offers a useable frequency range of 5Hz to 10kHz for heavy payload transducers. |
| 9155D-961 | Hammer Calibration. Allows calibration of instrumented impact hammers, includes 9961C cal fixture |

[1] MAB = Mechanical Amplifier Bar. Testing using the MAB is fixed frequency at or near the resonance of the MAB

[2] At reference frequency of 100 Hz

[3] Uncertainty based upon typical 9155 standard reference accelerometer uncertainty


[4] SUT (Sensor Under Test) weight may impact maximum amplitude and/or achievable frequency range

[5] Usable frequency range dependent upon desired maximum amplitude and SUT weight

LINEARITY OPTION

The 9155D-501 Linearity option is a software option available with the 9155 Accelerometer Calibration Workstation System. The software option allows for measurement of linearity across a specified amplitude range at a user-defined fixed frequency, dependent upon allowable test frequencies for the given shaker. The measurements are limited by the actuator hardware (i.e. the shaker, amplifier, etc.) and the specifications listed below are achievable with the indicated hardware only.

9155-500 Software

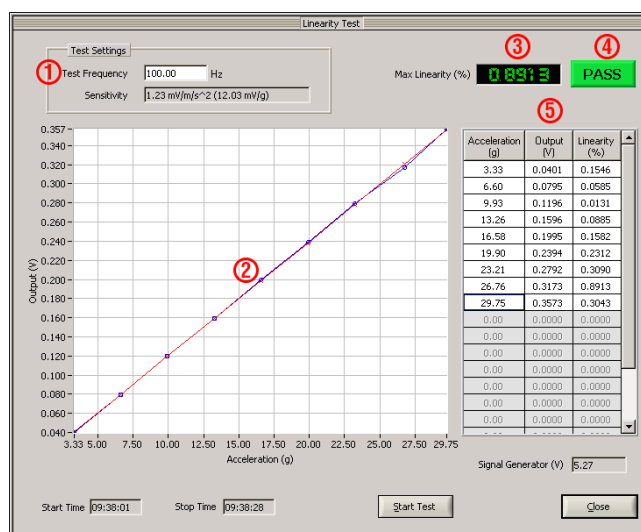

1. User-defined test frequency
2. Easy-to-read graphical display of results
3. Maximum linearity clearly indicated
4. Pass/Fail automatically determined based on sensor specification
5. Tabulated results for each test frequency

THE MODAL SHOP

AN MTS COMPANY

10310 Aerohub Boulevard, Cincinnati 45215 USA

Toll-Free in the USA: 800 860 4867

Phone: 1 513 351 9919 | Email: info@modalshop.com

The Modal Shop, Inc. offers structural vibration and acoustic sensing systems and services for various applications in design and test laboratories as well as manufacturing plants. An extensive sound and vibration rental program, precision calibration systems, and both modal and vibration shakers are designed to simplify test phases. Non Destructive Testing Systems help manufacturers provide 100% quality inspection of metal components. The Modal Shop, Inc. is a subsidiary of PCB Piezotronics, Inc., and PCB® is a wholly owned subsidiary of MTS Systems Corporation.

© 2019 The Modal Shop, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLine™ is a service mark of PCB Piezotronics, Inc. SWIFT™ is a registered trademark of MTS Systems Corporation in the United States. All other trademarks are property of their respective owners.