



# SOUND & VIBRATION RENTAL PRICELIST

USA AND CANADA

# What's New in Rental

## Simplified Testing with Digital Sensing Solutions

Testing, from sound to vibration and more, has never been easier than with The Modal Shop's **DigiDAQ® Series 485B39** for easy driver-free connection of two channels of any ICP® / IEPE or voltage sensors directly to a phone, tablet or computer. For industrial vibration measurements, **Digiducer® Series 333D** offers the same easy connectivity with no need for an external sensor. Digiducer and DigiDAQ units are available as kits with a system controller and preinstalled software, and USB or USB-C connections.

## Vibration / Accelerometers

- The new uniaxial **393C31** for **seismic** / low amplitude testing improves both noise floor and survivability of the predecessor by at least 5x for each.
- Table on Page 14 compares many popular **1 gram Ultra Miniature Triaxial** offerings, ranging from 500 g to 20 000 g. Variants offered with a connector or an attached cable, and **TEDS** available on some
- Many new offerings for testing in **high voltage** or **EMI** environments:
  - High Voltage triaxes, including **HV356A03** for use in high voltage environments up to 2000 V.
  - Case Isolated triaxes **354B04** and **354B05** for electrically noisy (EMI, ground loop) environments
  - Shield Grounded triaxial cables **010T** and **034T** mitigate effects of EMI
- **Shock / pyroshock** triaxial line 350B4x with mechanical isolation and electrically filtered expanded to have units from 5 000 g to 100 000 g

## Shakers

- Larger **K2500E500** and **-HT** Shaker Kits for testing to 500 lbf / 2224 N pk force with a matching **288M34** Impedance Head
- **2000X15** Modal-Pod™ test fixture accessory for 2500E shaker allows standardized testing of 1U, 2U and 3U CubeSats

## Calibration Products and Services

- In addition to a comprehensive list of calibration products and services from handheld single frequency to multiple frequency Portable Vibration Calibrators to best-in-class Calibration Workstations, did you know we also manufacture for sale and rent **Proximity Probe Calibration systems**? Use a **9110D** and an appropriate **PPA** prox probe kit to obtain a fast and traceable calibration of your prox probes.
- Larson Davis has released a new series of **handheld acoustic calibrators** including the dual frequency dual level **CAL1250** with improved accuracy and automatic correction for environmental ambient conditions.

## Acoustics and Environmental Vibration and Dust Monitoring

- Larson Davis Sound Level Meter Model **821** offers the easiest to use full featured Class 1 unit with available options for Sound Recording, 1/3 Octave Measurement, NC/RC Curve testing, and **NMS048** unattended outdoor monitoring kits.
- **EMS** Environmental Monitoring Systems offer a variety of unattended sound monitoring with cloud access to data with notifications
- **Sonitus Dust** and **Syscom ROCK** remote vibration measurement systems can be rented standalone with remote access, or incorporated into EMS sound monitoring solutions.
- PCB's **378A08** microphone/preamplifier combination offers a high sensitivity measurement with a miniature 1/4" size, allowing it to be used in multiple acoustic field situations (free-field, random/diffuse, and pressure) without worry of high frequency errors associated with larger microphones.
- Rentals for **Industrial Hygiene** for **noise dosimetry** and **human vibration** have expanded, with a streamlined process that makes the Rental Process even easier.
- CAE **SoundCam 3** offers the third generation of their popular Acoustic Camera for noise reduction, leak detection and more. Later in the year we expect to offer CAE's **SoundCam Go**, an Acoustic Camera attachment for a smart phone!

## Dynamic Pressure

- Expanded tables include new PCB Dynamic Pressure transducers, including a fuller range of both **113** High Frequency units and **137** Series free field blast pencil probes.
- Hi-Techniques **Echelon** Series ruggedized DAQ with 1 Ms/s for ultra-high frequency pressure and shock/pyroshock testing in the lab or the field.

# Table of Contents

Frequently Asked Questions	pg 4–5
ICP®/IEPE Accelerometers	6–16
Accelerometer Cabling and Mounting	10–13
Force Limited Vibration	17
Signal Conditioning	18–21
Angular and 6 DoF Inertial Sensors	21
High Temperature Accelerometers	22
Digital Plug-and-Play	23
DC Accelerometers	24–25
Accelerometer Calibration	26–27
Remote Environmental Monitoring	28
Pressure Sensors	29–30
Dynamic Strain and Industrial Monitoring	30
Structural/Modal Impact Hammers	31
Shaker/Exciter Kits and Components	32–34
Vibration Control	34
Impedance Heads	34
Noise and Vibration Dosimetry and Industrial Hygiene	35–36
Precision Microphones and Specialty Acoustics	37–39
Frequently Asked Questions for Sound Level Meters	39–40
Sound Level Meters & Audiometry	40–47
Additional Sensing Technology	48
Data Acquisition and Analysis	49–53
Ordering Notes Page	54
About The Modal Shop	55

PCB, ICP, IMI and Modally Tuned are registered trademarks of PCB Group. Digiducer, SoundTrack LxT, Spark, Blaze, Echo and EchoPlus are registered trademarks of PCB Piezotronics. All other trademarks are properties of their respective owners.

Due to continuing research and development, The Modal Shop reserves the right to amend or alter any part of the specifications given in this price list without prior notice. Although care has been taken to assure the accuracy of the data compiled in this publication, The Modal Shop does not assume any liability for errors or omissions. Rental model numbers are subject to discontinuation without notice. Prices are also subject to change without notice. All information is believed correct at time of release.



If distributed from The Modal Shop, this document is printed with more than 80 % post consumer content on carbon-neutral paper that has been manufactured with wind-generated electricity. Additional copies are available upon request, or feel free to share it with your sound and vibration lovin' coworkers or peers. If outdated, please recycle. **Think globally, act modally.** Thank you!

### Rental Period

#### ***Is 30 days the minimum rental period?***

No, depending on the product, 7 or 15 days are generally the minimum as shown on the top of each section. For most items any whole-day rental period is available starting with the minimum period, and pricing is scaled accordingly. The longer the initial rental period, the lower the per day rate. For reference, 7-day rentals are 45 % of the 30-day rate; 15-day rentals are 70 % of the 30-day rate. Additionally, long-term rentals may be discounted and a rent-to-own program is available. Contact us for day-definite rental rates and long-term discounts.

### Selecting Equipment

#### ***Is there help available for selecting which equipment is right for my test?***

Feel free to contact to an Application Engineer at The Modal Shop at 800.860.4867 or 513.351.9919, or email us at [rentalteam@modalshop.com](mailto:rentalteam@modalshop.com).

#### ***Are there online resources available to help with product selection?***

Product and application video tutorials as well as detailed selection guides can be accessed by visiting our website at [www.modalshop.com](http://www.modalshop.com).

#### ***Where can I find additional information or datasheets for a certain product?***

Datasheets and links to many products can be found on our website or via our sister companies' sites ([www.pcb.com](http://www.pcb.com) and [www.larsondavis.com](http://www.larsondavis.com)). If there are items you're interested in that aren't listed or you would like datasheets to be directly sent to you, please contact us.

#### ***I'm interested in items previously or currently sold by a PCB Group company that aren't listed; are they available?***

Many specialty use or older products are not shown in the current pricelist. Depending on potential market, new items will be considered at any time. For special requests, please contact a TMS Application Engineer at 800.860.4867 or 513.351.9919, or email our team at [rentalteam@modalshop.com](mailto:rentalteam@modalshop.com).

### Payment and Purchase Options

#### ***What payment options do you offer?***

Purchase Orders with Net 30 terms are accepted from any company with an open account and approved credit from TMS. Visa, MasterCard and American Express card orders are also accepted from anyone with approved credit.

#### ***How do I set up an account with The Modal Shop?***

If you do not have credit with us but do have active approved credit with PCB or any PCB Group company, please indicate this when placing a rental order. If you do not have approved credit with The Modal Shop, request a New Customer Credit Application from any Rental team member at TMS. This form can be approved within hours. You can download this form from our website and return it via email.

#### ***What buyout or purchase options exist for rental equipment?***

Most items on rent can be purchased from the active rental. 40 % of the accrued paid rental fees apply toward buyout of the rented product, up to 80 % of the purchase cost at fair market value. Additionally, rental and demo units that are fully inspected and warranted may be available for purchase at discounted rates directly from rental inventory.

### Factors Which Can Impede Rental Speed

#### ***Account credit status – am I in good standing?***

Please contact The Modal Shop to check your account status or to open an account. Order shipment may be held if the account has overdue balances that are unsolved and can affect future credit terms.

#### ***Is my credit card information needed?***

If using a credit card for the first time, please email the exact address where the credit card bills to the Rental Team Member, but do not email credit card number details. Call with card number details. Once on file we can reference the credit card for any future orders – no need to resend all information. Simply provide the name on the card, expiration date, and last 4 digits. Credit card information is stored on a secure server. Once on file we will be able to recall for future orders as noted above.

#### ***Are you waiting on my Rental Agreement return?***

Once an order is entered at TMS, a Rental Agreement is emailed back to the customer. Please verify all items and address for accuracy, and sign and return prior to shipment.

#### ***Will my order take longer to review? – Government-rated orders and orders for critical safety systems***

Unique terms, often found with government-rated orders, will be reviewed on a case by case basis require additional time for review. If your order falls into this category please provide the PO as soon as possible for review. The Modal Shop, Inc. ("TMS") is not a cleared facility and is not authorized to receive or handle classified information. Accordingly, TMS takes exception to any clauses or provisions in any purchase order or in any terms and conditions governing the purchase order referring to or concerned with classified information.

### Shipping

#### ***How long do rentals take to process and ship?***

Depending on the product mix and amount of testing required, two to three days is typically requested to test and prepare items and international logistics for shipment. Large rentals and systems may take longer for testing.

#### ***What shipping methods are available?***

Shipping costs are not included in rental fees. Select any UPS, FedEx, or equivalent options for delivery. Provide an account number to bill, or charges are added to the invoice or credit card bill.

#### ***Where should I return my TMS rental products?***

Rental returns can be shipped in original containers to The Modal Shop, 10310 Aerohub Boulevard, Cincinnati, OH 45215 USA. Products are tracked by serial/ID numbers, and shipments can be marked attn: Rental Return.

### Application Support

#### ***Is on-site help available to me during my test?***

The Modal Shop offers consulting services for some tests. Please contact us for details.

### Equipment Calibration

#### ***Will the units arrive calibrated?***

Yes, with NIST-traceable calibration certificates where applicable. The Modal Shop has internal calibration intervals of 1 year set for most test products. ANSI/ISO/IEC 17025:2000 makes clear that it is the responsibility of the end-user organization (in this case, the renter) to determine the appropriate calibration interval under the requirements of its own quality system. Per this, calibration certificates of rented equipment have "calibrated on" dates, but blank "calibration due" dates. Rentals ship with a customer-specific expected return date in mind - if equipment is expected out for 5 months, the last calibration date will be within the past 7 months. Calibration to additional standards (e.g. Z540 or specific FAA requirements) is available at an additional charge.

#### ***How often are rental units checked for functionality?***


Rental products are functionally checked prior to each shipment and upon every rental return.

### Miscellaneous

#### ***I have some unused PCB or Larson Davis items I am looking to sell. Are you interested in buying them?***

Absolutely! Depending on the products, we are always looking to get items to buy utilized. Send us a list!

Rental Process Overview

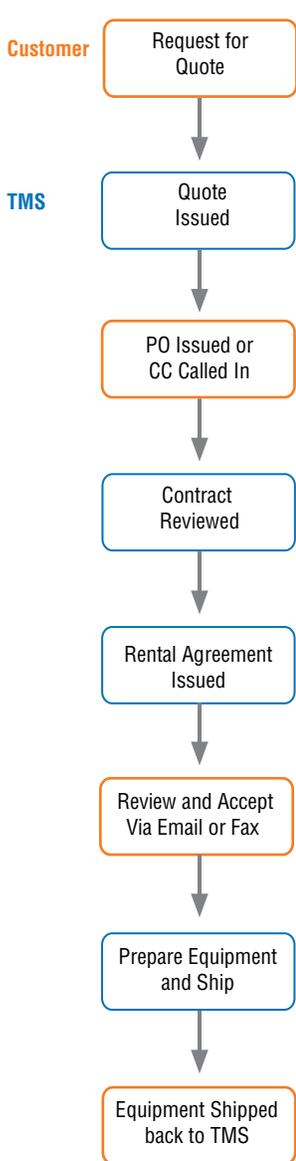

**Placing an Order**

**How do I place a rental order?**

US customers can contact their direct field sales person or representative, or anyone in The Modal Shop Sales or Application Engineering Teams to have your request processed. Contact us at The Modal Shop: 10310 Aerohub Boulevard, Cincinnati, OH 45215 – Phone: 800.860.4867 or 513.351.9919 – Fax: 513.458.2172 – Email: rentalteam@modalshop.com. General sales requests can be made through sales@modalshop.com. International rentals may be placed with the appropriate international distributor.

**Are there direct sales contacts in my area?**

Yes! Please check The Modal Shop website for contacts of local direct sales employees, direct representatives and international distributors in your area.

**Can items be reserved for rental?**

Certain items may be reserved for testing, even months in advance. Typically these include large data acquisition or excitation systems, meters or analyzers used for consulting projects, large quantities of transducers or specialty transducers.

**Is insurance available?**

Our Incoterms are typically FCA: Cincinnati. Similar to a standard business purchase, the renter’s responsibility begins when equipment leaves our dock via your choice of carrier and ends when we receive the equipment back at TMS. Often your business insurance will cover the product while you are responsible for it. Check your individual coverage with your insurance provider.

**What else should I know about the rental process?**

For each rental order placed, a Rental Agreement is sent (typically by email), along with the Terms and Conditions of our rental program. Please review the Rental Agreement carefully, as it details the shipping, billing and product information as understood by The Modal Shop (i.e., it indicates our order acceptance and confirmation). A signed Rental Agreement is required for the rental to ship, which indicates agreement with details listed and to our Terms and Conditions.

**Rental Period**

**When does a rental period begin and end?**

North American Rental Periods begin the calendar day after shipment and end the day everything is received at TMS/ Cincinnati. International Rentals Periods begin the date received and ends the date returned to TMS or TMS agent/ distribution.


**Are long-term rates available?**

Depending on the product, certain long-term discounts may apply if the rental period is fixed from the rental start date.

**I would like to extend my TMS rental – who do I need to contact?**

You don’t need to contact TMS to extend your rental, unless the rental had a fixed return date or a TMS representative has contacted you and requested a return. Invoices will be automatically sent each rental period for PO orders; credit card orders will be billed accordingly. Please ensure additional funds are added to the PO or send a new PO if necessary prior to extension date.

Rental Period	US and Canadian Customers	International Customers
	Begins calendar day after the equipment leaves TMS	Begins the date received
	Ends day equipment arrives back at TMS	Ends day equipment arrives back at TMS or TMS distributor

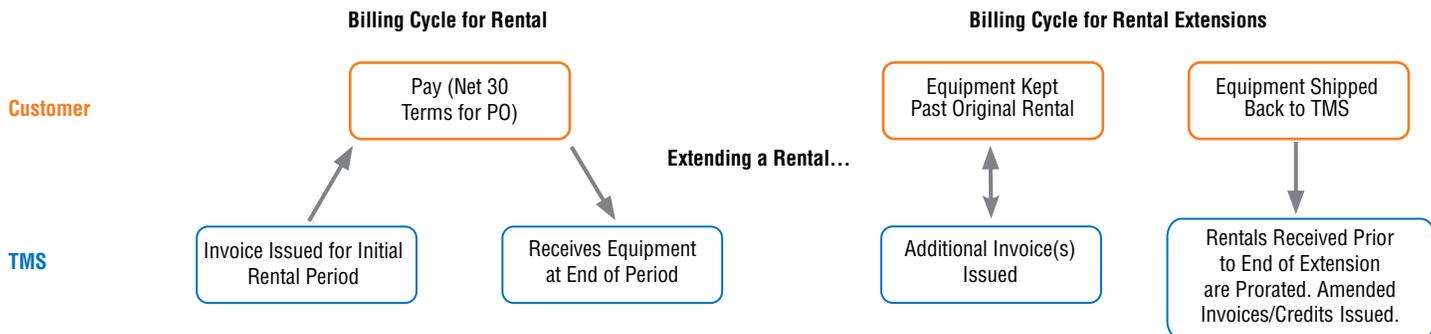

● ≥ 1000 g max ● 500 g max ● 50 g max ● 5 g and less

Uniaxial Accelerometers

Single Axis ICP® Accelerometers

ICP® is PCB Group's trademarked name for Integrated Electronic Piezoelectric (IEPE) sensors.

ICP stands for Integrated Circuit – Piezoelectric and is the industry standard. Some reasons why:

- Powers and transmits signal using standard coaxial two-wire cables, even over long lengths
- Minimizes possible noise contamination substantially, compared with charge mode sensors
- ICP® or equivalent signal conditioning often built into analyzers or can be rented (see Page 18)

Single direction, single axis units. Generally, start the selection with the maximum g amplitude range in mind. Next, verify other factors including temperature, range, mounting, and cable configuration. For multi-axis testing, consider a triaxial unit (Page 14-16) or use a triaxial mounting adaptor. Contact us for detailed selection assistance, or for unique requirements not shown.

○ TEDS Option

Units with TEDS option feature onboard digital memory. Model, serial, sensitivity, last calibration date and more are stored for use with TEDS-capable analyzers and conditioners. These units can be used with non-TEDS analyzers and operate as standard sensors. To find full specs on PCB.com, omit the T or TLD prefix.

⬇ Ground Isolated

Often the use of an anodized mounting base is required to help prevent ground loop problems and reduce electrical noise interference in required situations. These mounting bases are included where noted. Units with "J" prefix feature built-in ground isolation and are protected without the use of a base.

General Purpose

These units cover a wide range of tests ranging from vibration control to machine testing, and product qualification. Sensors detailed measure either ± 5 g to ± 500 g ranges, but piezoelectric accelerometers often measure an extremely high dynamic range and are perfectly suited for measurements of quite low vibration levels.



General Purpose	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
352A60	500	10	5 - 60 000 <sup>1</sup>	0.002	5 000	-65 to +250	top 5-44	002P or 018C	6.0	10-32 s	-	174
○ TLD352C03	500	10	0.3 - 1 500	0.000 5	5 000	-65 to +250	side 10-32	002C or 098EBAC	5.8	10-32 t	080A	82
353B15	500	10	0.7 - 18 000	0.005	10 000	-65 to +250	side 5-44	002P or 018C	2.0	5-40 s	080A15	82
353B17	500	10	0.7 - 17 000	0.005	10 000	-65 to +250	integral cable⇒10-32 m	adaptor or cable <sup>2</sup>	1.7	5-40 s	080A15	78
353B18	500	10	0.7 - 18 000	0.005	10 000	-65 to +250	top 10-32	002C or 098EBAC	1.8	5-40 s	080A15	82
353B03	500	10	0.7 - 11000	0.003	10 000	-65 to +250	side 10-32	002C or 098EBAC	10.5	10-32 t	080A	84
353B04	500	10	0.7 - 11 000	0.003	10 000	-65 to +250	top 10-32	002C or 098EBAC	10.5	10-32 t	080A	82
⬇ J353B04	500	10	0.7 - 9 000	0.003	10 000	-65 to +250	top 10-32	002C or 098EBAC	10.5	10-32 t	080A	98
○ TLD352C33	50	100	0.3 - 15 000	0.000 15	5 000	-65 to +200	side 10-32	002C or 098EBAC	5.8	10-32 t	080A	84
⬇ JTLD352C33	50	100	0.3 - 15 000	0.000 15	5 000	-65 to +200	side 10-32	002C or 098EBAC	5.8	10-32 t	080A	94
⬇ JTLD352C34	50	100	0.3 - 15 000	0.000 15	5 000	-65 to +200	top 10-32	002C or 098EBAC	5.8	10-32 t	080A	104
352C65	50	100	0.3-12 000	0.000 16	5 000	-65 to +200	side 5-44	002P or 018C	2	5-40 s	080A15	88
352C68	50	100	0.3 - 12 000	0.000 16	5 000	-65 to +200	top 10-32	002C or 098EBAC	2	5-40 s	080A15	88
353B33	50	100	0.7 - 6 500	0.000 5	10 000	-65 to +250	side 10-32	002C or 098EBAC	27	10-32 t	080A12	78
352C33	50	100	0.3 - 15 000	0.000 15	5 000	-65 to +200	side 10-32	002C or 098EBAC	5.8	10-32 t	080A	82
⬇ JTLD352C33	50	100	0.3 - 15 000	0.000 6	5 000	-65 to +200	side 5-44	002P or 018C	1.8	adhesive	-	94
352B	5	1 000	1 - 15 000	0.000 08	1 000	-65 to +250	top 10-32	002C or 098EBAC	25	10-32 t	080A12	132

Shock

Designed to withstand and measure extreme high-level, short-duration transient accelerations, units also feature internal filtering for resonance suppression. Applications include metal-to-metal tests, impacts and armor testing, explosive studies, pile driver monitoring, and simulated pyroshock events. High-g shock calibration is included with rental of 350 Series units.



Shock	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 3% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
350B01	100 000	0.05	0.5 - 3 500 <sup>1</sup>	0.3	200 000	-65 to +200	integral cable⇒10-32 m	adaptor or cable <sup>2</sup>	4.4	1/4-28 s	-	\$245
350D02	50 000	0.1	2 - 25 000 <sup>1</sup>	0.5	150 000	0 to +150	integral cable⇒10-32 m	adaptor or cable <sup>2</sup>	4.5	1/4-28 s	-	214
350M90	25 000	0.1	2 - 25 000 <sup>1</sup>	0.5	150 000	-6 to +150	integral cable⇒10-32 m	adaptor or cable <sup>2</sup>	4.5	1/4-28 s	-	210
350C03	10 000	0.5	0.2 - 25 000 <sup>1</sup>	0.04	50 000	0 to +150	top 10-32	002C or 098EBAC	4.5	1/4-28 s	-	186
350C04	5 000	1	0.2 - 25 000 <sup>1</sup>	0.02	50 000	0 to +150	top 10-32	002C or 098EBAC	4.5	1/4-28 s	-	200
352B70	5 000	1	0.4 - 20 000 <sup>1</sup>	0.025	10 000	-65 to +250	top 10-32	002C or 098EBAC	4.3	10-32 t	080A04	160

$\begin{matrix} \text{L} & \text{R} \\ \text{°F} & -320 & -65 & 0 & 150 & 200 & 250 \\ \text{°C} & -196 & -54 & -18 & 66 & 93 & 121 \end{matrix}$

$\begin{matrix} \text{L} & \text{R} \\ \text{t: tapped hole} \\ \text{s: integral stud} \end{matrix}$

1 – Frequency ranges specified to -3 dB for 350 series, 352B70, to ± 3 dB for 352A60, to ± 5% for 333 series.

2 – Sensor includes integral cable (generally 5 or 10 ft) that terminates in a 10-32 male connector. Can be used with scope input adaptor 070A02 to connect to BNC, or may be extended in length by using a combination of 070A109 10-32 feed through connector and joined with 002C or 098EBAC cable to terminate to BNC

○, and ⬇ – See Page 6 for notes on TEDS, and Ground Isolated options.

● ≥ 1000 g max ● 500 g max ● 50 g max ● 5 g and less

Uniaxial Accelerometers

Miniature

Lightweight units are ideal for high frequency testing with a small size and low mass. Applications include environmental testing, component qualification, structural testing, and operational behavior of lightweight or thin objects and fatigue testing.

⚠ When removing teardrop style sensors, it is essential to use the removal tool supplied along with an appropriate debonding agent.



Miniature	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
TLD352A57	2 000	2.5	0.3 - 15 000	0.001	5 000	-65 to +250	side 5-44	002P or 018C	1.3	adhesive	-	190
352A25	2 000	2.5	0.7 - 13 000	0.01	10 000	-65 to +250	side 3-56	030A10 included	0.6	adhesive	-	128
352A25/NC	2 000	2.5	0.7 - 13 000	0.01	10 000	-65 to +250	side 3-56	030A or 030C	0.6	adhesive	-	106
352A73	1 000	5	1.5 - 25 000	0.002	10 000	-65 to +250	side 10-32	002C or 098EBAC	0.3	adhesive	-	164
352C23 <sup>3</sup>	1 000	5	1.5 - 15 000	0.003	10 000	-65 to +250	side 3-56	030A10 included	0.2	adhesive	-	194
352C23/NC	1 000	5	1.5 - 15 000	0.003	10 000	-65 to +250	side 3-56	030A or 030C	0.2	adhesive	-	160
352C22 <sup>3</sup>	500	10	0.7 - 13 000	0.004	10 000	-65 to +250	side 3-56	030A10 included	0.5	adhesive	-	144
352C22/NC	500	10	0.7 - 13 000	0.004	10 000	-65 to +250	side 3-56	030A or 030C	0.5	adhesive	-	110
352A21	500	10	0.7 - 13 000	0.004	10 000	-65 to +250	side 3-56	030A10 included	0.6	adhesive	-	112
352A21/NC	500	10	0.7 - 13 000	0.004	10 000	-65 to +250	side 3-56	030A or 030C	0.6	adhesive	-	90
352A26	500	10	1.5 - 15 000	0.003	5 000	-65 to +250	side 3-56	030A or 030C	0.2	adhesive	-	216
352A26/NC	500	10	1.5 - 15 000	0.003	5 000	-65 to +250	side 3-56	030A or 030C	0.2	adhesive	-	180
352A24 <sup>3</sup>	50	100	0.8 - 10 000	0.000 2	5 000	-65 to +250	side 3-56	030A10 included	0.8	adhesive	-	112
352A24/NC	50	100	0.8 - 10 000	0.000 2	5 000	-65 to +250	side 3-56	030A or 030C	0.8	adhesive	-	90
352A75	50	100	1 - 10 000	0.000 2	5 000	-65 to +250	side 10-32	002C or 098EBAC	1.22	adhesive	-	160
352A74	50	100	0.8 - 10 000	0.000 2	5 000	-65 to +200	integral cable⇒10-32 m	adaptor or cable <sup>2</sup>	1.22	adhesive	-	164

Structural Test and Modal Analysis

Excellent phase characteristics and lightweight construction, ideal for structural vibration, multi-channel modal analysis, analytical model correlation, and force-response testing. Many units have TEDS functionality as an option, see information below. A wide range of structural test hardware is also available, including shakers and impact hammers, as well as large-channel cable management solutions.



Modal Array	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
TLD333B30	50	100	0.5 - 3 000 <sup>1</sup>	0.000 15	5 000	0 to +150	side 10-32	002C or 098EBAC	4	5-40 t	080A25	86
333B	50	100	2 - 1 000 <sup>1</sup>	0.000 07	3 500	0 to +150	base 3 pin	080Bxx (Page 11)	5.6	3-pin	-	50
T333B	50	100	2 - 1 000 <sup>1</sup>	0.000 07	3 500	0 to +150	base 3 pin	080Bxx (Page 11)	5.6	3-pin	-	50
TLD333B32	50	100	0.5 - 3 000 <sup>1</sup>	0.000 15	5 000	0 to +150	side 10-32	002C or 098EBAC	4	adhesive	-	88
TLD333B50	5	1 000	0.5 - 3 000 <sup>1</sup>	0.000 05	4 000	0 to +150	side 10-32	002C or 098EBAC	7.5	5-40 t	080A25	88
TLD333B52	5	1 000	0.5 - 3 000 <sup>1</sup>	0.000 05	4 000	0 to +150	side 10-32	002C or 098EBAC	7.5	adhesive	-	88
333B53	5	1 000	0.5 - 3 000 <sup>1</sup>	0.000 05	4 000	0 to +150	side 10-32	002C or 098EBAC	7.5	adhesive	-	100

High Temperature

Adjusted circuitry allows measurement of these units in temperatures to + 325 °F (163 °C) and are used with traditional ICP power systems. Slight low frequency and broadband resolution specifications may be affected. Testing above 325 °F? See Page 22, for charge mode accelerometers to measure at higher temperatures.



High Temp.	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
HT352A21	500	10	0.7 - 13 000	0.004	10 000	-65 to +325	side 3-56	030A10 included	0.6	adhesive	-	194
HT352A21/NC	500	10	0.7 - 13 000	0.004	10 000	-65 to +325	side 3-56	030A or 030C	0.2	adhesive	-	154
HT352C65	50	100	0.3-12 000	0.000 2	5 000	-65 to +250	side 5-44	002P or 018C	2	5-40 s	080A15	120

°F -320 -65 0 150 200 250  
 °C -196 -54 -18 66 93 121

t: tapped hole  
s: integral stud

1 – Frequency ranges specified to ± 5% for 333 series.  
 2 – Sensor includes integral cable (generally 5 or 10 ft) that terminates in a 10-32 male connector. Can be used with scope input adaptor 070A02 to connect to BNC, or may be extended in length by using a combination of 070A109 10-32 feed through connector and joined with 002C or 098EBAC cable to terminate to BNC  
 3 – Sensor not hermetically sealed, not acceptable for certain harsh environments  
 ○, and ↓ – See Page 16 for notes on TEDS

● ≥ 1000 g max ● 500 g max ● 50 g max ● 5 g and less

Uniaxial Accelerometers, continued

Cryogenic

Cryogenic ICP® accelerometers are designed to operate at temperatures below the typical -65 °F (-54 °C) temperature limit of most voltage mode sensors. Specialized cryogenic circuitry and quartz sensing elements allow survivability in demanding environments.



Cryogenic	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
351B14	300	5	0.7 - 10 000	0.01	10 000	-320 to +250	top 10-32	002C or 098EBAC	1.8	5-40 s	-	198
J351B41	15	100	0.7 - 3 500	0.000 5	1 000	-320 to +250	side 10-32	002C or 098EBAC	28	10-32 t	-	218
351B41	15	100	0.7 - 3 500	0.000 5	1 000	-320 to +250	side 10-32	002C or 098EBAC	28	10-32 t	-	198

Environmental Stress Screening (ESS)

Environmental Stress Screening (ESS) is a general reliability testing term used to define the practice of exposing primarily electro-mechanical devices and delicate flight hardware to environmental stresses in an attempt to create failures and expose defects.



ESS	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
352A92	20 000	0.25	1 - 20 000	0.04	30 000	-65 to +325	side 10-32	002C or 098EBAC	0.16	adhesive	-	194
352A91	5 000	1	1 - 20 000	0.02	10 000	-65 to +325	side 10-32	002C or 098EBAC	0.17	adhesive	-	194
320C03	500	10	0.7 - 9 000	0.003	10 000	-100 to +325	side 10-32	002C or 098EBAC	10.5	10-32 f	-	130
320C04	500	10	0.7 - 9 000	0.003	10 000	-100 to +325	top 10-32	002C or 098EBAC	10.5	10-32 f	-	126
320C15	500	10	0.7 - 18 000	0.005	10 000	-100 to +325	side 5-44	002P or 018C	2	5-40 m	-	120
320C20	500	10	1.5 - 10 000	0.006	10 000	-100 to +325	top 10-32	002C or 098EBAC	6.5	10-32 m	-	122
320C52	500	10	0.6 - 15 000	0.004	5 000	-100 to +325	side 5-44	002P or 018C	1.85	thru-hole	-	178
320C33	50	100	0.7 - 6 000	0.000 3	2 000	-100 to +325	side 10-32	002C or 098EBAC	20	10-32 t	080A12	150

↪ °F -65 -50 0 150 176 180 200 250  
°C -54 -45 -18 65 80 82 93 121

Seismic/Low Frequency and Industrial Uniaxial Accelerometers

Seismic/Low Frequency

Ideal for bridges, civil structures, floor and foundation monitoring, optical instrument studies, semiconductor manufacturing, and construction and other site surveys for sensitive equipment. Low frequency certification is included with rental of 393 Series units (see Page 12).



Seismic	Amplitude Range (± g pk)	Sensitivity (V/g)	Frequency Range: (± 3% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Stud included	\$/30 day
393A03	5	1	0.2 - 6 000	0.000 01	5 000	-65 to +250	top MIL-C-5015	012E or 052BR	210	1/4-28	081B20	\$160
393B04	5	1	0.02 - 1 700	0.000 003	300	0 to +176	top 10-32	002C or 098EBAC	50	10-32	081B05	144
393C	2.5	1	0.01 - 1 200 <sup>1</sup>	0.000 1	100 (!)	-65 to +200	side 10-32	002C or 098EBAC	885	10-32	081B05	280
393B05	0.5	10	0.2 - 1 700	0.000 004	300	0 to +176	top 10-32	002C or 098EBAC	50	10-32	081B05	144
393B12	0.5	10	0.05 - 4 000	0.000 008	5 000	-50 to +180	top MIL-C-5015	012E or 052BR	210	1/4-28	081B20	170
393B31	0.5	10	0.07 - 300 <sup>1</sup>	0.000 001	40 (!)	0 to +150	top MIL-C-5015	012E or 052BR	635	1/4-28	081B20	240
393C31	0.5	10	0.07 - 300 <sup>1</sup>	0.000 000 2	250	0 to +150	top MIL-C-5015	012E or 052BR	748	1/4-28	081B20	240

↪ °F -65 -50 0 150 176 180 200 250  
°C -54 -45 -18 65 80 82 93 121

Notes for 393 Series sensor rentals:

- (!) The low mechanical shock limits of both the 393C and 393B31 require special handling during use and shipping
- Current traceable calibration for both standard (10 Hz-upper 5 %) and low frequencies (0.5 Hz-10 Hz) included
- In situ ± 1 g handheld calibration of 393B04 can be performed with model 394C06, for 393A03 use 699B02; for remainder of 393 sensors larger than 250-gram mass and/or less than ± 0.5 g maximum amplitude range, use calibrator model 9100D on Page 26
- Some units have triaxial mounting blocks available, rented separately. 393B04 and 393B05 use model 080B11, 393A03 and 393B12 use 080A57, 393C use 080M16, 393B31 use 080M189 (Page 11)

1 – Frequency ranges specified to ± 10% for 393B31.

↪ – See Page 16 for notes on TEDS, and Ground Isolated options.

● 500 g max ● 50 g max ● 5 g and less

Seismic/Low Frequency and Industrial Uniaxial Accelerometers

Industrial

Ruggedized accelerometers from PCB's IMI Sensors feature stainless steel housings, typically a MIL-C-5015 connector and electrical case isolation to protect against electromagnetic interference, surface noise pickup and ground loop problems.



Industrial	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 3% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Stud included	\$/30 day
603C00	500	10	0.5 - 10 000	.002	5 000	-65 to +250	top MIL-C-5015	012E or 052BR	51	1/4-28 t	request	42
EX603C01	50	100	0.5 - 10 000	0.000 35	5 000	-65 to +250	top MIL-C-5015	012E or 052BR	51	1/4-28 t	request	50
628F01	50	100	0.33 - 12 000	0.001	5 000	-65 to +250	top MIL-C-5015	012E or 052BR	94	1/4-28 t	request	64
625B01	50	100	0.2 - 10 500	0.000 5	5 000	-65 to +250	side MIL-C-5015	012E or 052BR	145	1/4-28 s	request	86
602D01	50	100	0.5 - 8 000	0.000 35	5 000	-65 to +250	side MIL-C-5015	012E or 052BR	74	1/4-28 s	request	42
601A01	50	100	0.27 - 10 000	0.000 05	5 000	-65 to +250	top MIL-C-5015	012E or 052BR	80	1/4-28 t	request	50
601A02	10	500	0.17 - 10 000	0.000 035	5 000	-65 to +250	top MIL-C-5015	012E or 052BR	80	1/4-28 t	request	55
Δ 608M31	250	20	0.5 - 10 000	0.001	5 000	-65 to +250	10 ft cable⇒pigtail	-	99.3	1/4-28 t	-	42
Δ 608A11/030AC	50	100	0.5 - 10 000	0.000 35	5 000	-65 to +250	30 ft cable⇒pigtail	-	99.3	1/4-28 t	-	42
Δ 607M03	100	50	0.43 - 10 000	0.000 75	5 000	-65 to +250	10 ft cable⇒pigtail	-	29	1/4-28 s	-	60
333D01	20	8.4% <sup>1</sup>	0.9 - 15 000	0.000 25	7 000	+14 to +158	integral 10 ft⇒USB	-	131	1/4-28 s	-	180

Δ – Submersible  
1 – % fullscale value (FSV)/g. See Digiducer FAQ webpage for details.

°F -65 0 14 150 158 200 250  
°C -54 -18 -10 66 70 93 121

t: tapped hole  
s: integral stud

Specialty Use Accelerometers

Digital Piezoelectric

Digiducer Model 333D01 is the first fully integrated and ruggedized packaging of a high-resolution, broad-frequency piezoelectric accelerometer with integrated internal 24-bit DC digital output. Taking reliable, quality vibration measurements is as simple as recording audio input in a tablet or PC. See page 23 for more options.



333D01 Digiducer

High Temperature Accelerometers

Built-in electronics in typical ICP/IEPE sensors allow for many signal benefits, but generally limit sensor use to 250 °F or 325 °F. Charge mode sensors eliminate the built in electronics, and therefore can be used to higher temperatures, some up to 900 °F. See Pages 26 and 27.



357B61 Charge Mode



357B14 Charge Mode



DC Low Frequency Units

DC Response Accelerometers

When analysis of very low frequency motion or constant acceleration is required, a DC accelerometer is necessary. Unlike piezoelectric accelerometers, DC sensors respond to 0 Hz and are, therefore often referred to as DC response sensors.

High Frequency Industrial Velocity Sensor

These piezoelectric sensors power with ICP like the accelerometers above but output a signal proportional to velocity for direct measurements on the plant floor.



V0622B01

	Amplitude Range (± in/s)	Sensitivity (mV/in/s)	Frequency Range (± 3 % unless noted)	Resolution (µin/s)	Mech. Shock Limit (± g pk)	Temperature Range (°F)	Connector Type/Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included with Rental	\$/30 day
EXV0622B01	50	100	3 - 9 000	450	5 000	-65 to +250	top MIL-C-5015	012E or 052BR	94	1/4-28 t	-	100

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

**Standard cables follow this example:** model 003C03 is a 3-foot 003C (10-32 to BNC) series cable. Cable styles are described below.

**Cable style:**

- 002: White general purpose PTFE cable, -130 to 400 °F, 29 pF/ft capacitance, 1.9 mm diameter
- 003: Blue low-noise PTFE cable, -320 to 500 °F, 30 pF/ft capacitance, 2.01 mm diameter
- 012: Black RG58/U cable, -40 to 176 °F, 29 pF/ft capacitance, 4.9 mm diameter
- 018: Miniature, lightweight, black coaxial cable, -22 to 221 °F, 55 pF/ft capacitance, 1.37 mm diameter
- 030: Miniature, low-noise, blue coaxial PTFE cable, -130 to 500 °F, 30 pF/ft capacitance, 1.09 mm diameter
- 052: Black industrial polyurethane stranded conductor cable, -58 to 250 °F, 6.35 mm diameter
- 098: Green low noise flexible TFE stranded conductor cable, -130 to 500 °F, 2.06 mm diameter

**Suggestions:**

- General Purpose: 098
- Impact hammers, fixed microphones: 012
- Industrial applications: 012 or 052
- Ultra lightweight sensors: 030 or 018
- Charge mode sensors: low noise cables
- Strong or repetitive motion: stranded conductor cables

Standard Coaxial Cables for Sensor Connector to **BNC plug [AC]**

Prices in US\$ per 30-day rental



10-32 plug [EB] to BNC plug [AC]

ft.	002 Cable	\$/30 day	ft.	003 Cable	\$/30 day	ft.	098 Cable	\$/30 day
3	002C03	11	3	003C03	11	3	098EB003AC	13
5	002C05	12	5	003C05	13	5	098EB005AC	14
10	002C10	13	10	003C10	14	10	098EB010AC	15
20	002C20	14	20	003C20	17	20	098EB020AC	19
30	002C30	18	30	003C30	22	30	098EB030AC	24
50	002C50	24	50	003C50	29	50	098EB050AC	33
100	002EB100AC	40	100	003EB100AC	52	100	098EB100AC	53



5-44 plug [AG] to BNC plug [AC]

ft.	003 Cable	\$/30 day	ft.	098 Cable	\$/30 day	ft.	018 Cable	\$/30 day
3	003C03	11	3	098AG003AC	13	3	018C03	15
5	003C05	13	5	098AG005AC	13	5	018C05	15
10	003C10	14	10	098AG010AC	15	10	018C10	16
20	003C20	17	20	098AG020AC	19	20	018C20	20
30	003C30	22	30	098AG030AC	23	30	018C30	24
50	003C50	29	50	098AG050AC	30			
100	003EB100AC	51						



BNC plug [AC] to BNC plug [AC]

ft.	002 Cable	\$/30 day	ft.	003 Cable	\$/30 day	ft.	012 Cable	\$/30 day	ft.	098 Cable	\$/30 day
3	002T03	11	3	003D03	11	3	012A03	\$9	5	098AC005AC	12
5	002T05	10	5	003D05	12	5	012A05	\$11	10	098AC010AC	14
10	002T10	10.60	10	003D10	13	10	012A10	\$11	20	098AC020AC	18
20	002T20	13	20	003D20	17	20	012A20	\$12	30	098AC030AC	22
30	002T30	16	30	003D30	20	30	012A30	\$13	50	098AC050AC	30
50	002AC050AC	28	50	003AC050AC	33	50	012A50	\$15			
100	002AC100AC	44	100	003AC100AC	44	100	012AC100AC	\$30			



3-56 plug [EK] to BNC plug [AC]

ft.	030 Cable	\$/30 day
5	030C05	20
10	030C10	22
20	030C20	27
30	030C30	36
50	030C50	48



2-socket MIL-C-5015 [AE] to BNC plug [AC]

ft.	012 Cable	\$/30 day	ft.	052 Cable	\$/30 day	ft.	012 Cable	\$/30 day
5	012E05	17	5	052BR005AC	12	10	012R10	18
10	012E10	18	10	052BR010AC	14			
20	012E20	22	20	052BR020AC	18	ft.	052 Cable	\$/30 day
30	012E30	26	30	052BR030AC	22	10	052AE010AC	22
50	012E50	30	50	052BR050AC	30	ft.	012 Cable	\$/30 day
						100	012AE100AC	34

2-socket MIL-C-5015 [BR] to BNC [AC] with Drain Wire



ft.	508 Cable	\$/30 day
10	508BR010AC	13
20	508BR020AC	20
30	508BR030AC	24
100	508BR100AC	50



Pigtail [AD] to BNC plug [AC]

ft.	002 Cable	\$/30 day
10	002AC10AD	11
25	002AC25AD	14

Standard Coaxial Cables for Sensor Connector to **10-32 plug [EB]**

Prices in US\$ per 30-day rental

10-32 plug [EB] to 10-32 plug [EB]

ft.	002 Cable	\$/30 day	ft.	003 Cable	\$/30 day	ft.	098 Cable	\$/30 day
10	002A10	12.50	3	003A03	13	10	098EB010EB	15
20	002A20	15	10	003A10	15.50	20	098EB020EB	18
30	002A30	19	20	003A20	19	30	098EB030EB	24
50	002A50	24	30	003A30	23			

5-44 plug [AG] to 10-32 plug [EB]

ft.	003 Cable	\$/30 day	ft.	098 Cable	\$/30 day
10	003G10	16	10	098AG010EB	16
20	003G20	20	20	098AG020EB	19
30	003G30	25	30	098AG030EB	25

3-56 plug [EK] to 10-32 plug [EB]

ft.	030 Cable	\$/30 day
10	030A10	23
20	030A20	29
30	030A30	35
50	030A50	47

Various Additional Coaxial Cables

Prices in US\$ per 30-day rental

ft.	Sensor Connector	Terminating Connector	Model	\$/30 day	ft.	Sensor Connector	Terminating Connector	Model	\$/30 day	ft.	Sensor Connector	Terminating Connector	Model	\$/30 day
10	5-44 plug [AG]	10-32 plug [EB]	003G10	16	10	SMB plug [FW]	BNC plug [AC]	003V10	17	25	Pigtail [AD]	BNC plug [AC]	002AC025AD	20
100	BNC jack [EB]	BNC plug [AC]	012AC100AB	39	7	BNC jack [EB]	SMB plug [FW]	002AB007FW	21	10	2-pin MIL	Pigtail [AD]	052BR010AD	18
200	BNC jack [EB]	BNC plug [AC]	012AC200AB	76	6	Pigtail [AD]	SMB plug [FW]	002FW006AD	19	20	2-pin MIL	Pigtail [AD]	052BR020AD	16
100	BNC jack [EB]	10-32 plug [EB]	003PH100AC	68	10	Pigtail [AD]	BNC plug [AC]	002AC010AD	16	10	10-32 hex [AH]	BNC plug [AC]	002AH010AC	20

Cable Adaptors and Connectivity Accessories



**070A02** \$10  
Scope input adaptor, 10-32 jack to BNC plug



**070A03** \$18  
Connector adaptor, 10-32 plug to BNC jack



**070A109** \$8  
Cable feed-through connector, 10-32 jack to 10-32 jack



**070A08** \$16  
Cable adaptor, 10-32 jack to BNC jack



**070A11** \$4  
BNC T connector, 2 BNC jacks, 1 BNC plug



**070A12** \$4  
Coupler, BNC jack to BNC jack

Mounting Accessories

Prices in US\$ per 30-day rental

Triaxial and Uniaxial Mounting Accessories

Adhesive mounting bases (and mating studs) are included with rental as shown in the accelerometer selection tables. For metric studs or additional items not shown, see below or inquire.



Adaptor Stud

**081A90** 5-40 to 10-32 \$4/30 days  
**081A08** 10-32 to 1/4-28 \$5  
*Metric available upon request*



Mounting Stud

**081A27** 5-40 to 5-40 \$5/30 days  
**081B05** 10-32 to 10-32 with shoulder \$5  
**081B20** 1/4-28 to 1/4-28 with shoulder \$3  
**081A40** 1/4-28 x 0.438" \$2  
*Metric available upon request*



Mounting Stud Adaptors

**TMSA6205** 5-40 internal thread, 10-32 external \$5  
**TMSA6264** 10-32 internal thread, 1/4-28 external \$5



Adaptor Plate

**080A149** 5-40 f to 10-32 m \$20/30 days  
**9155-MNT05** 5-40 f to 1/4-28 m \$36  
**9155-MNT06** 10-32 f to 1/4-28 m \$36  
**9155-MNT07** adhesive to 1/4-28 m \$36



Petro Wax

**080A109** Petro Wax, \$15 for purchase.  
Petro wax provides a simple mounting method for many applications; ideal for temperatures below 160 °F / 70 °C, lower level (± 20 g and less for lightweight accelerometers under 40 grams) and lower frequency applications. One square, 1" x 1" x 0.25"



Triaxial Block for Array Accelerometer

**080B55** \$8  
Triaxial mounting block, outside mount. Used with 333B and T333B.



Removal Tool for Mini Accels

**039 Series**  
Avoid sensor damage by using tool and applying shear force: one supplied for each model of applicable sensor rented. *Additional units available upon request*

*039A27 for 352C22, 352A21, HT352A21, 352A25*  
*039A26 for 352C23*  
*039A28 for 352A24*  
*039A07 for 740B02*



Petro Wax

**080A24** Petro Wax, \$23 for purchase.  
Petro wax provides a simple mounting method for many applications; ideal for temperatures below 160 °F / 70 °C, lower level (± 20 g and less for lightweight accelerometers under 40 grams) and lower frequency applications. Four squares, 1" x 1" x 0.25"



Mounting Clips

Mounting clips can be attached to a test structure with double-sided tape or adhesive. Once installed, accelerometers are snapped into the clips. These units offer easy installation but limit the measureable frequency range and upper temperature for testing, see specifications. Typical grease mount frequency limit: 2 kHz (± 5 %), dry mount limit: 1 kHz (± 10 %). *Note that the clips have a 125 °F (52 °C) continuous and 175 °F (79 °C) short-term spec.*



Quick Bond Gel

**080A90** Quick Bond Gel \$20 for purchase.  
Cyanoacrylate-based mounting methods offer an ideal mounting method for lightweight accelerometers (under 20 grams). A fast room temperature cure time coupled with both a wide useable frequency and temperature range makes this option very popular. Be sure to use a debonder such as Acetone and wait a few minutes when removing the sensor.

Model	Size	Compatible with	Model
<b>080A237</b>	0.4"	356B21, 356A4X Series	<b>080A172</b>
	0.45"	356A32	<b>080A173</b>
<b>080B160</b>	0.55"	356A02, 356A14, 356A15	<b>080A160</b>



Hardcoat Aluminium Adhesive Mounting Base

5-40 Thread				10-32 Thread				1/4-28 Thread			
Model	Hex Size	Thickness	\$/30 day	Model	Hex Size	Thickness	\$/30 day	Model	Hex Size	Thickness	\$/30 day
<b>080A15</b>	5/16"	0.125"	5	<b>080A04</b>	3/8"	0.2"	5	<b>080M217</b>	5/16"	0.125"	20
<b>080A25</b>	1/2"	0.125"	4	<b>080A</b>	1/2"	0.187"	5	<b>080A13</b>	3/4"	0.2"	10
<b>080A145</b>	3/4"	0.2"	5	<b>080A12</b>	3/4"	0.2"	5				
				<b>080A68</b>	7/8"	0.2"	5				



Style "A" Style "B"

Model	Dimensions	Mass	Material	Mounting via	Accel. Fasteners	Max. Hex	Style	\$/30 day
<b>080B16</b>	0.37 in Cube		Anodized Aluminium	10-32 Thread	5-40 Thread	5/16 in	A	26
<b>080A180</b>	1.00 in Cube		Titanium	10-32 Screws	1/4-28 Thread	7/8 in	C	40
<b>080B11</b>	1.24 in Cube		Anodized Aluminium	10-32 Screws	10-32 Screws	7/8 in	B	36
<b>080A57</b>	1.00 in Cube		Stainless Steel	10-32 Screws	1/4-28 Screws	1-1/4 in	B	56
Model	Dimensions	Mass	Material	Mounting via	Accel. Fasteners	Notes		\$/30 day
<b>080A194</b>	0.28 in Cube		Anodized Aluminium	Adhesive	Adhesive	For Teardrop Accels.		20
<b>080A208</b>	1.01 in Cube		Anodized Aluminium	6-32 Screws	4-40 Screws	Use with series 3711		40
<b>080M189</b>	1.24 in Cube	615 gram	Stainless Steel	10-32 Screws	1/4-28 Screws	Use with 393B31		56



Triaxial Mounting Adaptors

Accelerometer Magnetic Mounting Bases

Prices in US\$ per 30-day rental

 Use caution when using magnetic mounting bases, as the installation force can cause excessive shock and damage the sensor. Install the magnet base to the test object on the edge and “roll” the assembly gently into position, or install the magnet base to the test object first and then attach the sensor.

Flat Surface


 <p><b>080A30</b> \$22 2.5 lbf (11 N) pull, 3/8" hex, 5-40 thread, 0.23" (5.8 mm) thick (for 2-gram or less sensors)</p>	 <p><b>080A27</b> \$22 12 lbf (54 N) pull, 3/4" hex, 10-32 stud, 0.27" (6.7 mm) thick</p>	 <p><b>080A120</b> \$18 15 lbf (67 N) pull, 0.75" diameter, 0.43" (10.92 mm) thick, 1/4-28 thread (shown with stud, ordered separately)</p>
 <p><b>080A121</b> \$20 35 lbf (156 N) pull, 1" diameter, 0.53" (13.5 mm) thick, 1/4-28 thread (shown with stud, ordered separately)</p>	 <p><b>080A122</b> \$24 50 lbf (222 N) pull, 1.5" diameter, 0.62" (15.2 mm) thick, 1/4-28 thread (shown with stud, ordered separately)</p>	 <p><b>080A179</b> \$20 12 lbf (54 N) pull, 3/4" hex, 10-32 threaded, 0.4" (10.16 mm) thick</p>

Curved Surface

 <p><b>080A130</b> \$26 15 lbf (68 N) pull, 0.75" diameter, 0.72" (18 mm) thick, 1/4-28 thread (shown with stud, ordered separately)</p>	 <p><b>080A131</b> \$26 35 lbf (156 N) pull, 1.0" diameter, 1.02" (25.9 mm) thick, 1/4-28 thread (shown with stud, ordered separately)</p>	 <p><b>080A132</b> \$26 55 lbf (225 N) pull, 1.5" diameter, 1.25" (32 mm) thick, 1/4-28 thread (shown with stud, ordered separately)</p>
---	---	---

Frequently Requested Extras for Accelerometer Rentals

In addition to mounting bases, mounting studs, removal tools, and sometimes integral cables included as noted on accelerometer pages, the items below are the most requested optional add-ons to accelerometer rentals. Just ask if you have a special request!



Rental Rx

Rental First Aid Kit. Includes no-charge incidental equipment to be used as needed, and returned with remainder of rental. *Murphy's Law can apply to even the best laid plans. A coaxial cable end may fail, or the cable may be a victim to rotating machines or an equipment cart. Or a small mounting base or stud falls into a machine, never to be seen again. Include part number "Rental Rx" when requesting a quote or order and get a no-charge bag of additional items (duplicate cables, bases, mounting studs and more) that may come in handy during testing. If cable failure occurs, please note the cable number (each have a unique ID) and include details of failure with the rental return. Certain items, such as mounting bases and studs, are also included. Use these items if the original items are inadvertently lost or additional are needed. Items not returned will be charged at list.*

TMS WP

Options for testing in wet, moist or dusty environments. Using a hermetically sealed sensor where dust, moisture and water may be a concern – even fully submersible – can be achieved. For sensors with a 1/4-28 4-socket plug, various options are available with the 034W and 098W cables on Page XXX, including IP68 rating to a 1m depth for 4 hours. Need additional protection? Some sensor/cable junctions may be eligible for TMS WP which the TMS team will attach and seal a to the sensor's electrical connector with o-rings and heat-shrink tubing. This process offers even more protection and permits short-term underwater use.

Calibration

*Although some sensors including the 393-series Seismic line are provided with low-frequency calibrations, most rental single and triaxial sensors include calibration from 10 Hz to upper 10 % of the frequency limit of the axis. NIST-traceable low-frequency calibration is available for any standard sensor at an additional charge. High frequency calibration is also available.*

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

**Standard cables follow this example:** model 010G05 is a 5-foot 010G (1/4-28 4 pin to (3) BNC Breakout) series cable. Cable styles are described below.

**Cable style:**

- 010: Blue general purpose FEP, -130 °F to 392 °F, 16 pF/ft, 2.54 mm diameter, 1-inch bend radius
- 019: Blue flexible lightweight Silicone, -76 °F to 500 °F, 15 pF/ft, 1.77 mm diameter, 1-inch bend radius
- 034: Blue general purpose low-noise FEP, -130 °F to 392 °F, 14 pF/ft, 1.96 mm diameter, 1-inch bend radius
- 036: Blue flexible Silicone, -76 °F to 392 °F, 15 pF/ft, 2.64 mm diameter, 1-inch bend radius
- 078: Blue rugged and flexible Polyurethane, -158 °F to 185 °F, 14 pF/ft, 3.02 mm diameter, 1-inch bend radius

**Standard Triaxial Cables for Terminating Connector to 8-36 mini plug [EH]**

Prices in US\$ per 30-day rental



**BNC breakout [JW] to 8-36 mini plug [EH]**

ft.	034K Cable	\$/30 day	ft.	019B Cable	\$/30 day
10	034K10	47	5	019B05	46
20	034K20	54	10	019B10	70
30	034K30	63	20	019B20	98
50	034K50	80	ft.	034M21	\$/30 day
			30	034M21/030	90



**10-32 breakout [JY] to 8-36 mini plug [EH]**

ft.	034H Cable	\$/30 day
10	034H10	60
20	034H20	70
30	034H30	80
50	034H50	96



**1/4-28 microtech [CA] to 8-36 mini plug [EH]**

ft.	034EH Cable	\$/30 day
50	034EH050CA	80



**LEMO 9-pin to 8-36 mini plug [EH]**

ft.	034M59-0002	\$/30 day
9.8	034M59-0002	54

**Standard Triaxial Cables for Terminating Connector to Standard 1/4-28 microtech plug [AY]**

Prices in US\$ per 30-day rental



**LEMO 9-pin to 1/4-28 microtech plug [AY]**

ft.	010M136	\$/30 day	ft.	010M136	\$/30 day
9.8	010M136/M003	47	20	010M136/020	53

Connect standard triaxial accelerometers with one cable to a 9-pin LEMO input connector with pinout matched for Siemens PLM Simcenter SCADAS V-24 cards or SCADAS XS, Mueller BBM PAK modules with a 9-pin LEMO input including ICP42 G2 and more.



**BNC breakout [JW] to 1/4-28 microtech plug [AY]**

ft.	010G Cable	\$/30 day	ft.	034G Cable	\$/30 day	ft.	078G Cable	\$/30 day	ft.	036G Cable	\$/30 day
5	010G05	34	5	034G05	38	10	078G10	42	5	036G05	40
10	010G10	36	10	034G10	42	20	078G20	50	10	036G10	48
15	010G15	38	20	034G20	48	30	078G30	62	20	036G20	64
20	010G20	40	30	034G30	58	50	078G50	84	ft.	036M Cable	\$/30 day
25	010G25	44	50	034G50	74	ft.	034M22	\$/30 day	20	036M20	84
30	010G30	47				20	034M22/020	64	30	036M30	92
50	010G50	52				30	034M22/030	68			



**Pigtails [DZ] to 1/4-28 microtech plug [AY]**

ft.	010P Cable	\$/30 day	ft.	034A Cable	\$/30 day
10	010P10	23	5	034A05	19
20	010P20	27	50	034A50	78
30	010P30	35			
50	010P50	44			



**10-32 breakout [JY] to 1/4-28 microtech [AY]**

ft.	034F Cable	\$/30 day
10	034F10	50
20	034F20	55
30	034F30	62
50	034F50	80



**1/4-28 microtech [CA] to 1/4-28 microtech plug [AY]**

ft.	010AY Cable	\$/30 day	ft.	078AY Cable	\$/30 day
20	010AY020CA	46	50	078AY050CA	88
35	010AY035CA	56	100	078AY100CA	144
50	010AY050CA	67			
100	010AY0100CA	110			



**1/4-28 microtech [AY] to 1/4-28 microtech [AY]**

ft.	010D Cable	\$/30 day	20	010D20	36
5	010D05	28	25	010D25	40
10	010D10	32	30	010D30	44
			50	010D50	54



**BNC shield grounded [JW] to 1/4-28 microtech plug [AY]**

ft.	010T Cable	\$/30 day	ft.	034T Cable	\$/30 day
10	010T10	42	10	034T05	50
20	010T20	47	20	034T10	56
30	010T30	52	30	034T20	62
50	010AY050NF	64	50	034AY050NF	74

These cables should be used with Ground Isolated ICP Triaxial sensors to mitigate Electromagnetic Influence when present.: Cables with NF connector feature a jumper across the triple splice to terminate the 4-conductor shield to the coax leads, and are ideal for applications around electromagnetic influence (EMI)

**Standard Triaxial Cables for Terminating Connector to IP68-rated 1/4-28 microtech plug\* [RB]**

Prices in US\$ per 30-day rental



**BNC breakout [JW] to IP68-rated 1/4-28 microtech plug [RB]**

ft.	034W Cable	\$/30 day	20	034W20	66	ft.	078W Cable	\$/30 day	20	078W20	72
10	034W10	60	30	034W30	75	10	078W10	63	30	078W30	84
			50	034W50	90				50	078W50	110

● ≥ 1000 g max ● 500 g max ● 50 g max ● 5 g and less

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Triaxial ICP® Accelerometers

Prices in US\$ per 30-day rental

Triaxial accelerometers are designed with three orthogonal sensing elements to enable simultaneous multi-axis measurements (x-, y-, and z-axis). Smaller units minimize mass loading effects and permit installation into confined areas. A unit with a tapped hole in its base may be secured with a screw passing through the object under test to aid in axis alignment, or may be stud-mounted to a separate adhesive mounting base.

Typically, ICP® types are preferred due to their ease of use, however, when temperatures exceed the limits established by their built-in electronics, then a charge output unit is recommended. These units typically feature a 4-pin electrical connector (for a single cable hook-up) or an integral 4-conductor cable.

General Purpose

This range of hermetically sealed 10.5 gram titanium triaxial accelerometers is our most popular style and covers a wide range of uses. Applications vary widely and include general vibration testing, motor and pump monitoring, design studies, and vibration control. Many units are available with optional TEDS (Transducer Electronic Datasheet) built in to simplify test setup with a TEDS-capable DAQ system.



10.5 gram sensors  
Titanium



TLD356A16  
Aluminum



354C02

General Purpose	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
354C02	500	10	0.3 – 4 000	0.000 5	5 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	15.5	thru-hole	-	284
356A02	500	10	0.5 – 6 000	0.000 5	7 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	230
○ TLD356A02	500	10	0.5 – 6 000	0.000 5	7 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	230
356A33	500	10	2 – 7 000 <sup>2</sup>	0.004	10 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	5.3	5-40	-	262
356A25	200	25	0.5 – 6 500	0.000 2	7 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	266
○ TLD356A26	100	50	0.7 – 6 500	0.000 2	7 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	280
○ TLD356A14	50	100	0.3 – 6 000	0.000 1	7 000	-65 to +176	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	284
○ TLD356A15	50	100	1.4 – 6 500	0.000 2	7 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	264
○ TLD356A16	50	100	0.3 – 6 000	0.000 1	7 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	7.4	10-32	080A12	274
356A15	50	100	1.4 – 6 500	0.000 2	7 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	250
356A17	10	500	0.4 – 4 000	0.000 06	5 000	-65 to +176	side 1/4-28 4-pin	010G, 034G, or 078G	9.3	5-40	-	260

Ultra Miniature

Smaller, low mass accelerometers minimize mass loading effects and permit installation into confined areas.



356A01



353A13



356A06

Ultra Miniature	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
356A05	20 000	1	1 – 10 000	0.02	10 000	-65 to +325	cable⇒1/4-28 4-pin	010G, 034G, or 078G	0.8	adhesive	-	338
▲ 356A05/NC	20 000	1	1 – 10 000	0.02	10 000	-65 to +325	cable⇒1/4-28 4-pin	010G, 034G, or 078G	0.8	adhesive	-	300
356A04	5 000	1	1 – 10 000	0.02	10 000	-65 to +325	cable⇒1/4-28 4-pin	010G, 034G, or 078G	0.8	adhesive	-	338
▲ 356A04/NC	5 000	1	1 – 10 000	0.02	10 000	-65 to +325	cable⇒1/4-28 4-pin	010G, 034G, or 078G	0.8	adhesive	-	300
356A13	1 000	5	2 – 8 000 <sup>2</sup>	0.003	10 000	-65 to +250	cable⇒1/4-28 4-pin	010G, 034G, or 078G	1	adhesive	-	378
▲ 356A13/NC	1 000	5	2 – 8 000 <sup>2</sup>	0.003	10 000	-65 to +250	cable⇒1/4-28 4-pin	010G, 034G, or 078G	1	adhesive	-	340
356A01	1 000	5	2 – 8 000 <sup>2</sup>	0.003	10 000	-65 to +250	cable⇒1/4-28 4-pin	010G, 034G, or 078G	1	adhesive	-	338
▲ 356A01/NC	1 000	5	2 – 8 000 <sup>2</sup>	0.003	10 000	-65 to +250	cable⇒1/4-28 4-pin	010G, 034G, or 078G	1	adhesive	-	300
356A06	1 000	5	2 – 8 000 <sup>2</sup>	0.003	10 000	-65 to +250	side 8-36 4-pin	034K	1	adhesive	-	338
▲ 356A06/NC	1 000	5	2 – 8 000 <sup>2</sup>	0.003	10 000	-65 to +250	side 8-36 4-pin	034K	1	adhesive	-	300
356A09	500	10	2 – 8 000 <sup>2</sup>	0.003	5 000	-65 to +250	side 8-36 4-pin	034K	1	adhesive	-	338
▲ 356A09/NC	500	10	2 – 8 000 <sup>2</sup>	0.003	5 000	-65 to +250	side 8-36 4-pin	034K	1	adhesive	-	300
356A03	500	10	2 – 8 000 <sup>2</sup>	0.003	5 000	-65 to +250	cable⇒1/4-28 4-pin	010G, 034G, or 078G	1	adhesive	-	338
▲ 356A03/NC	500	10	2 – 8 000 <sup>2</sup>	0.003	5 000	-65 to +250	cable⇒1/4- 28 4-pin	010G, 034G, or 078G	1	adhesive	-	300
○▲ TLD356A03/NC	500	10	2 – 8 000 <sup>2</sup>	0.003	5 000	-65 to +250	cable⇒1/4- 28 4-pin	010G, 034G, or 078G	1	adhesive	-	320

°F -65 -20 0 14 122 150 170 176 250 325 356  
 °C -54 -29 -18 -10 50 66 77 80 121 163 180

● ≥ 1000 g max ● 500 g max ● 50 g max ● 5 g and less

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Triaxial ICP® Accelerometers

Prices in US\$ per 30-day rental

Miniature

Lightweight ceramic shear design, titanium cased hermetically sealed units that minimize effects of mass loading. Some units available with TEDS (Transducer Electronic Data Sheet) and high temperature options.



Miniature	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
356B20	5 000	1	2 – 10 000 <sup>2</sup>	0.03	7 000	-65 to +250	side 8-36 4-pin	034K	4	5-40	080A	300
▲ 356B20/NC	5 000	1	2 – 10 000 <sup>2</sup>	0.03	7 000	-65 to +250	side 8-36 4-pin	034K	4	5-40	080A	260
⬇️ ○ J356A43	500	10	0.3 – 10 000 <sup>2</sup>	0.000 8	5 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	4.2	adhesive	-	340
356B21	500	10	2 – 10 000 <sup>2</sup>	0.004	10 000	-65 to +250	side 8-36 4-pin	034K	4	5-40	080A	276
▲ 356B21/NC	500	10	2 – 10 000 <sup>2</sup>	0.004	10 000	-65 to +250	side 8-36 4-pin	034K	4	5-40	080A	230
▲ 356A19/NC	500	10	0.6 – 15 000	0.006	10 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	4	5-40	080A	334
○ 356A43	500	10	0.4 – 10 000	0.000 8	5 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	4.2	adhesive	-	314
⬇️ ○ J356A44	100	50	0.4 – 10 000	0.000 6	5 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	5.7	adhesive	-	340
⬇️ ○ J356A45	100	50	0.4 – 10 000	0.000 5	5 000	-65 to +185	side 1/4-28 4-pin	010G, 034G, or 078G	5.7	adhesive	-	340
○ 356A45	50	100	0.4 – 10 000	0.000 5	5 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	4.2	adhesive	-	316
356A32	50	100	0.7 – 5 000	0.000 3	5 000	-65 to +250	side 8-36 4-pin	034K	5.4	5-40	080A	296
▲ 356A32/NC	50	100	0.7 – 5 000	0.000 3	5 000	-65 to +250	side 8-36 4-pin	034K	5.4	5-40	080A	252
○ TLD356A32	50	100	0.7 – 5 000	0.000 3	5 000	-65 to +250	side 8-36 4-pin	034K	6.4	adhesive	-	308
○ ▲ TLD356A32/NC	50	100	0.7 – 5 000	0.000 3	5 000	-65 to +250	side 8-36 4-pin	034K	6.4	adhesive	-	262

High Temperature

Adjusted circuitry allows measurement of these units in temperatures to + 325 °F (163 °C) and are used with traditional ICP power systems. Slight low frequency and broadband resolution specifications may be affected. Testing above 325 °F? See Page 22, for charge mode accelerometers to measure at higher temperatures.



High Temperature	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
HT356B20	5 000	1	2 – 10 000 <sup>2</sup>	0.03	7 000	-65 to +250	side 8-36 4-pin	034K	4	5-40	080A	340
▲ HT356B20/NC	5 000	1	2 – 10 000 <sup>2</sup>	0.03	7 000	-65 to +250	side 8-36 4-pin	034K	4	5-40	080A	300
HT356B01	1 000	5	2 – 8 000 <sup>2</sup>	0.003	10 000	-65 to +356	side 1/4-28 4-pin	010G, 034G, or 078G	1	adhesive	-	364
▲ HT356B01/NC	1 000	5	2 – 8 000 <sup>2</sup>	0.003	10 000	-65 to +356	side 1/4-28 4-pin	010G, 034G, or 078G	1	adhesive	-	328
HT356B21	500	10	2 – 10 000 <sup>2</sup>	0.004	10 000	-65 to +325	side 8-36 4-pin	034K	4	5-40	080A	322
▲ HT356B21/NC	500	10	2 – 10 000 <sup>2</sup>	0.004	10 000	-65 to +325	side 8-36 4-pin	034K	4	5-40	080A	276
HT356A33	500	10	1.1 – 10 000 <sup>2</sup>	0.004	10 000	-65 to +325	side 1/4-28 4-pin	010G, 034G, or 078G	5.3	5-40	080A	296
○ HTTLD356A02	500	10	0.7 – 6 000	0.000 8	7 000	-65 to +325	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	282
HT356A02	500	10	0.7 – 6 000	0.000 8	7 000	-65 to +325	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	262
HT356A44	50	50	12 – 7 000	0.000 6	5 000	-65 to +200	side 1/4-28 4-pin	010G, 034G, or 078G	4.2	adhesive	-	344
○ HTTLD356A15	50	100	7 – 6 500	0.0005	7 000	-65 to +325	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	310
HT356A15	50	100	7 – 6 500	0.0005	7 000	-65 to +325	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	290

Shock / Filtered

Features built in low pass filtering designed to withstand and measure severe acceleration environments involving extreme high-level, short-duration transient accelerations.



Shock	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
350B42	50 000	0.1	4 – 10 000	0.5	150 000	-10 to +150	side 1/4-28 4-pin	010G, 034G, or 078G	27	thru-hole	-	730
▲ 350B42/NC	50 000	0.1	4 – 10 000	0.5	150 000	-10 to +150	side 1/4-28 4-pin	010G, 034G, or 078G	27	thru-hole	-	690
350B50	10 000	0.5	1.5 – 20 000 <sup>1</sup>	0.03	25 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	8	thru-hole	080A197	540
▲ 350B50/NC	10 000	0.5	1.5 – 20 000 <sup>1</sup>	0.03	25 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	8	thru-hole	080A197	500
350A43	10 000	0.5	0.2 – 20 000 <sup>1</sup>	0.04	50 000	0 to +150	side 1/4-28 4-pin	010G, 034G, or 078G	62.5	thru-hole	-	720
▲ 350A43/NC	10 000	0.5	0.2 – 20 000 <sup>1</sup>	0.04	50 000	0 to +150	side 1/4-28 4-pin	010G, 034G, or 078G	62.5	thru-hole	-	680
350B43	10 000	0.5	0.2 – 25 000 <sup>1</sup>	0.04	50 000	-10 to +150	side 1/4-28 4-pin	010G, 034G, or 078G	27	thru-hole	-	730
▲ 350B43/NC	10 000	0.5	0.2 – 25 000 <sup>1</sup>	0.04	50 000	-10 to +150	side 1/4-28 4-pin	010G, 034G, or 078G	27	thru-hole	-	690
356A67	500	10	0.5 – 3 000 <sup>2</sup>	0.000 5	7 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	10.5	10-32	080A12	316
356A63	500	10	2 – 4 000 <sup>2</sup>	0.008	10 000	-65 to +250	side 1/4-28 4-pin	010G, 034G, or 078G	5.3	5-40	080A	306
HT356A66	500	10	2 – 4 000 <sup>2</sup>	0.002	7 000	-65 to +325	side 1/4-28 4-pin	010G, 034G, or 078G	9	10-32	080A12	344

● ≥ 1000 g max ● 500 g max ● 50 g max ● 5 g and less

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Triaxial ICP® Accelerometers

Prices in US\$ per 30-day rental

Case Isolated

Case isolated accelerometers ensure measurement accuracy in the presence of electrical noise sources, such as EMI and ground loops. They utilize ceramic sensing elements in a shear arrangement, offering high output and low noise for excellent signal to noise ratio.



354B04  
354B05

Case Isolated	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 5% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting via	\$/30 day
354B04	500	10	0.4 – 10 000 <sup>1</sup>	0.000 5	2 000	-65 to +325	cable⇒ 1/4-28 4-pin	010G, 034G, or 078G	14.5	thru-hole	6-32 SHCS	430
354B05	50	100	0.4 – 10 000 <sup>1</sup>	0.000 3	2 000	-65 to +325	cable⇒ 1/4-28 4-pin	010G, 034G, or 078G	14.5	thru-hole	6-32 SHCS	439

High Voltage

Accelerometers with non-conductive housings for use in high voltage up to 2 000 V.



356A01

High Voltage	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
HV356A03	500	10	2 – 6 800 <sup>2</sup>	0.003	5 000	-65 to +250	cable⇒ 1/4-28 4-pin	010G, 034G, or 078G	1.7	adhesive	-	460

Structural Test / ODS / Modal

Suited for traditional experimental modal analysis or operational modal analysis, with tight phase specification vital for global parameter estimation. TEDS-enabled units help channel bookkeeping when used with compatible systems.



TLD356B18  
356B18



TLD356M98

Modal Array	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
356B08	50	100	0.3 – 6 500	0.000 1	7 000	-65 to +170	side 1/4-28 4-pin	010G, 034G, or 078G	20	10-32	080A68	280
356B18	5	1 000	0.3 – 5 000	0.000 05	5 000	-20 to +170	side 1/4-28 4-pin	010G, 034G, or 078G	25	10-32	080A68	280
○ TLD356B18	5	1 000	0.3 – 5 000	0.000 05	5 000	-20 to +170	side 1/4-28 4-pin	010G, 034G, or 078G	25	10-32	080A68	290
○ TLD356M98	5	1 000	0.3 – 5 000	0.000 05	5 000	-20 to +170	side 1/4-28 4-pin	010G, 034G, or 078G	39	10-32	080A68	280

Human Vibration

Human Vibration related accelerometers extend beyond the seat pad triaxial listed here.

Many work with the HVM200 and are listed on Page 35



356B41

Human Vibration	Amplitude Range (± g pk)	Sensitivity (mV/g)	Frequency Range: (± 10% unless noted)	Resolution (g rms)	Mechanical Shock Limit (± g pk)	Temperature Range (°F)	Connector Type / Location	Cables compatible with sensor – To connect to BNC, use cable type	Sensor Mass (grams)	Mounting	Mounting Base included	\$/30 day
356B41	10	100	0.5 – 1 000 <sup>1</sup>	0.000 2	2 000	+14 to 122	cable⇒ 1/4-28 4-pin	010G, 034G, or 078G	272	contact	-	402
▲ 356B41/NC	10	100	0.5 – 1 000 <sup>1</sup>	0.000 2	2 000	+14 to 122	cable⇒ 1/4-28 4-pin	010G, 034G, or 078G	272	contact	-	364

↪ °F -65 -20 0 122 150 170 250  
°C -54 -29 -18 50 66 77 121

○ TEDS Option

Units with TEDS option feature onboard digital memory. Model, serial, sensitivity, last calibration date and more are stored for use with TEDS-capable analyzers and conditioners. These units can be used with non-TEDS analyzers and operate as standard sensors. To find full specs on PCB.com, omit the T or TLD prefix.

≡ Ground Isolated

Often the use of an anodized mounting base is required to help prevent ground loop problems and reduce electrical noise interference in required situations. These mounting bases are included where noted. Units with “J” prefix feature built-in ground isolation and are protected without the use of a base.

▲ /NC Suffix

No cable option. Although the base model from PCB includes a cable, the NC option omits the cable to allow selection of length when rented separately.

**Note:** Cables are rented separately from rental sensors, to allow selection of length. See Page 13 for information.

- 356B20, 356B21 and 356A33 family Y and Z axes specified to ± 5 %. X-axis specified from 2 - 7000 Hz at ± 5 %
- 356A01, 356B01, 356A03, 356A06 and 356A09 family Y and Z axes specified to ± 5 %. X-axis 2-5000 Hz, ± 5 %
- 356A04 and 356A05 family
- 356A63 specified to ± 5 %
- Noted 350 series triaxial sensor frequency ranges specified to -3 dB
- 356B41 Seat Pad Accelerometer specified to ± 5 %, similar to Larson Davis' SEN027

3-Component Quartz Force Rings / Dynamic Triaxial Force Sensors and Force Limited Vibration Test Equipment



260 Series ICP



260 Series Charge Mode



261 Series ICP



261 Series Charge Mode

**260 Series** 3-Component Force Rings should be statically preloaded with the provided stud to provide friction to mating surface to transmit shear forces

**261 Series** 3-Component Force Links feature a force ring between two mounting plates and are already preloaded. These are ideal for impact testing and force plates.

**Charge mode** units have 3x 10-32 connectors and can be used to higher temperatures, and allow easy signal summing with for multiple force sensor array systems

**ICP®** voltage-mode units feature 1/4-28 4-pin connector and low impedance output allows simple connectivity and conditioning even in industrial environments and long cable runs without signal degradation.

Model	Configuration	Sensor Type	Measurement Range (lb [kN])		Low Frequency Response -5% (Hz)		Connector Jack Type	Used Primarily With Cable Type	Price
			z-axis	x and y axes	z-axis	x and y axes			
260A01	Force Ring	ICP	1 000 [4.45]	500 [2.22]	0.01	0.001	1/4-28 4-pin	010G, 034G, or 078G	\$680
260A02	Force Ring	ICP	1 000 [4.45]	1 000 [4.45]	0.01	0.001	1/4-28 4-pin		720
260A03	Force Ring	ICP	10 000 [44.5]	4 000 [17.7]	0.01	0.001	1/4-28 4-pin		818
260A11	Force Ring	Charge	1 000 [4.45]	500 [2.22]	[*]	[*]	(3) 10-32 jacks	098EB*EB (ends in 10-32) 098AC*EB (ends in BNC)	500
260A31**	Force Ring	Charge*	1 000 [4.45]	500 [2.22]	[*]	[*]	(3) 10-32 jacks		600
261A31**	Preloaded Link	Charge*	1 000 [4.45]	500 [2.22]	[*]	[*]	(3) 10-32 jacks		1100
260A12	Force Ring	Charge*	1 000 [4.45]	1 000 [4.45]	[*]	[*]	(3) 10-32 jacks		744
260A13	Force Ring	Charge*	10 000 [44.5]	4 000 [17.7]	[*]	[*]	(3) 10-32 jacks		778
261B01	Force Link	ICP	1 000 [4.45]	500 [2.22]	0.01	0.001	1/4-28 4-pin	010G, 034G, or 078G	840
261B02	Force Link	ICP	1 000 [4.45]	1 000 [4.45]	0.01	0.001	(3) 10-32 jacks		1140
261B03	Force Link	ICP	10 000 [44.5]	4 000 [17.7]	0.01	0.001	(3) 10-32 jacks		1240
261B11	Force Link	Charge*	1 000 [4.45]	500 [2.22]	[*]	[*]	(3) 10-32 jacks	098EB*EB (ends in 10-32) 098AC*EB (ends in BNC)	690
261B12	Force Link	Charge*	10 000 [44.5]	1 000 [4.45]	[*]	[*]	(3) 10-32 jacks		1100
261B13	Force Link	Charge*	1 000 [4.45]	4 000 [17.7]	[*]	[*]	(3) 10-32 jacks		1180

\*-Measurement resolution and low-frequency response are dependent upon noise floor and discharge time constant of the signal conditioning and readout systems used. See Page 22 for in-line charge amplifier (converter) options.

\*\*-Charge mode with reversed shear polarity.

**Chassis / Power** 443 and 070 modules below connect to a PCB 440 Series chassis. [441A39](#) 9-slot: \$440, [441A101](#) 1-slot AC power supply: \$140

<a href="#">443B102</a>	Dual Mode single channel amplifier For ICP® and charge output sensors. Able to be DC coupled to allow the preload of 260 series force sensors to be set during installation. Includes selectable gain, discharge time constant, and high and low pass filters. <i>Requires chassis with power supply.</i>	\$700
<a href="#">070M69</a>	The Computational Signal Conditioner computes the difference and outputs up to four pairs of signals. Also provides an output summation of the differences. The unit can be used with voltage signals or supplies constant current excitation for ICP® sensors. 0.1x 1x 10x gain, eight BNC input, four BNC differenced outputs and one BNC summed difference output. <i>BNC summed difference output [(A-B) + (C-D) + (E-F) + (G-H)] × Gain, Differenced Output 4-Channel BNC: (A-B), (C-D), (E-F), (G-H).</i>	440
<a href="#">070M70</a>	The Charge Summing Patch Panel allows the addition of up to eight charge inputs and sums them to provide one charge output. Eight BNC inputs, one BNC output. <i>Summed output (A + B + C + D + E + F + G + H).</i>	720
<a href="#">070A15</a>	Charge Summing block, (4) 10-32 jack inputs to (1) BNC output. <i>For charge output sensors only. Used in cases e.g. measuring force over a large surface area using a plate with one force sensor under each corner. The force sensor signals may be summed via a 070A15 unit, and the resulting summed charge signal can be sent to a single charge amplifier.</i>	120

Most Popular

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

### PCB Battery Powered ICP® Signal Conditioners

Battery powered signal conditioners provide a portable, convenient method for powering ICP®-compatible sensors and in-line charge converters. To use, connect a cable from the sensor to the input and a cable from the data acquisition system to the output. When power is turned on, a conditioned signal output is transmitted to the readout device. These units are powered with standard 9-volt alkaline batteries and provide an AC coupled output. Each unit features a color coded meter on the front panel that monitors sensor operation and detects cable faults.



480C02



480E09



480B21

Model	Channel Count	Gain	Low Freq Response (-5 %)	High Freq Response (-5 %)	Broadband Noise (µV rms)	Power	Input Type(s)	Output Type(s)	Mass (kg)	Notes	\$/30 day
480C02	1	1x	0.05 Hz	500 kHz	3.25	(3) 9 V, 100 h	BNC	BNC	0.3		60
480E09	1	1x 10x 100x	0.15 Hz	100 kHz	2	(3) 9 V, 40 h	BNC	BNC	0.34	General Purpose	90
480B21	3	1x 10x 100x	0.15 Hz	100 kHz	3.54	(3) 9 V, 25 h	4 pin microtech	BNC	0.5		200
480M122	1	1x 10x 100x	0.15 Hz	100 kHz	3.25	(3) 9 V, 50 h	BNC	BNC	0.3		110

### PCB 482C Series 4-channel ICP® Signal Conditioners

482C series are 4-channel benchtop signal conditioners ranging from units with simple ICP® no gain operation to more complex units with options for gain, bridge/differential conditioning and powering charge-mode sensors. The 482C series models are DC powered, however, they are supplied with a universal AC power adaptor. All units except for the basic 482C05 and 482C15 include a computer interfaces and are supplied with PCB's Multi-Channel Signal Conditioner control software.



482C05 & 482C15



482C24 & 482C16

Model	Channel Count	Gain	Low Freq Response (-5 %)	High Freq Response (-5 %)	Broadband Noise (µV rms)	Power	Input Type(s)	Output Type(s)	Mass (kg)	Notes	\$/30 day
482C05	4	1x	< 0.1 Hz	> 1 MHz	3.5	AC (DC avail)	BNC	BNC	0.57		130
482C15	4	1x 10x 100x	0.05 Hz	100 kHz	21	AC (DC avail)	BNC	BNC	0.57		150
482C24	4	0.1x-200x	0.05 Hz	50 kHz	50	AC (DC avail)	BNC	BNC	0.908		480
482C16	4	0.1x-200x	0.05 Hz	> 50 kHz	50	AC	BNC	BNC	0.91	ICP and Voltage	400
482C27	4	0.1x-200x (ICP) <sup>1</sup>	0.05 Hz <sup>1</sup>	50 kHz	50	AC (DC avail)	BNC <sup>1</sup>	BNC	1.13	ICP, Bridge, Diff	1000
482C54	4	0x-200x	0.05 Hz	> 75 Hz	50	AC	BNC	BNC	1.09	ICP, Charge, Voltage	800

1 – Mixed-mode conditioners that also powers Bridge/Differential mode sensors, specs are shown for ICP mode.

### PCB 483C Series 8-channel ICP® Signal Conditioners

483C series are 8-channel rack mounted units which also are offered in a range from simple ICP no gain operation to more complex units with options for gain, bridge/differential conditioning and powering charge-mode sensors. These units are AC powered only. All units except for the basic 483C05 and 483C15 include a computer interfaces and are supplied with PCB's Multi-Channel Signal Conditioner control software for signal conditioner setup.



483C41



Other units

Model	Channel Count	Gain	Low Freq Response (-5 %)	High Freq Response (-5 %)	Broadband Noise (µV rms)	Power	Input Type(s)	Output Type(s)	Mass (kg)	Notes	\$/30 day
483C15	8	1x 10x 100x	< 0.05 Hz	> 17 kHz	5.6	AC	BNC	BNC	0.567		540
483C28	8	0.1x-200x	0.05 (ICP) <sup>1</sup>	> 50 kHz	5.6	AC	BNC <sup>1</sup>	BNC	3.18	Also Bridge/ Differential	1900
483C50	8	0.1x-200x	<0.05 Hz	> 80 kHz	50	AC	BNC	BNC	3.2		950

### 477A Series Low Pass Input Filter Chips for select 482C and 483C units

These robust filter chips can be installed in nearly all 482C and 483C unit except for basic unity gain (482C05 and 483C05) and those with selectable Low Pass Filtering included (483C41).

The 477A Series second-order Butterworth low pass (-12 dB/octave) filters are located at the front end of the signal path, before any gain has been applied. The Modal Shop typically installs these prior to rental shipment. Order in quantities based on channel count required. Filters can be mixed in any conditioner, please specify channel number with filter model if ordering a combination.

The low pass input filters are located at the front end of the signal path, before any gain has been applied. These Input Filters are PCB's 477A Series of plug-in filters. The standard models are second-order Butterworth low pass (-12 dB/octave) filters. Typical cutoff frequencies include:

Model	477M03	477A01	477A02	477A03	477A04	477A05	477A06	477A07	477A08	477A09	477A10	\$/30 day
Filter Type Cutoff Frequency (-3 dB)	50 Hz	100 Hz	200 Hz	500 Hz	1 Hz	2 Hz	5 Hz	10 Hz	20 Hz	50 Hz	100 Hz	32

☐ - Most Popular

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.



**485B39**  
2-channel, provides output direct to phone, tablet or PC



**482A21**  
1-channel AC powered basic conditioner



**482A22**  
4-channel AC powered basic conditioner



**481A01**  
16-channel AC powered basic conditioner, 19" rack

## Additional ICP® Signal Conditioning

Other than the newer 485B39 which both conditions and digitizes signals for lab-grade measurements anywhere, the rest of these are historic units for lab testing that provide conditioning for small or large channel measurements.

Model	Manufacturer	Channel Count	Gain	Low Freq Response (-5 %)	High Freq Response (-5 %)	Broadband Noise (µV rms)	Power	Input Type(s)	Output Type(s)	Mass (kg)	Notes	\$/30 day
<b>482A21</b>	PCB	1	1x	0.1 Hz	1000 kHz	3.25	DC	BNC	BNC	0.685		140
<b>485B39</b>	PCB	2	adjustable	0.8 Hz	20.7	5	USB, 5 V at 100 mA	BNC	USB	0.125	Digital Signal Conditioner	200
<b>482A22</b>	PCB	4	1x	< 0.1 Hz	> 1MHz	3.25	AC	BNC	BNC	0.76		350
<b>481A01</b>	PCB	16	1x	0.5 Hz	100 kHz	11	AC	BNC and DB 50-pin	BNC	6.8	Include front panel and computer control	990

### What is ICP®?

ICP is an abbreviation of “integrated circuit piezoelectric”, and is a registered trademark of PCB Group, Inc. – the parent company of The Modal Shop. Piezoelectric materials are used in various sensors to measure dynamic acceleration, force, pressure and strain. An ICP sensor includes built-in electronics (integrated circuit) that convert high-impedance charge signals generated by the piezoelectric sensing element into a low-impedance voltage signal suitable for input to a data acquisition system or recorder.

### Why ICP®? What are the advantages?

Advantages of ICP systems include low mass, field robustness, and simplicity of cabling, which leads to lower overall system cost, and have made it the defacto industry standard. Low-impedance voltage outputs of an ICP transducer can be easily transmitted over ordinary two-wire or coaxial cables to any voltage readout or recording device. The output signal can be transmitted through long cables and used in a wide variety of environments with little signal degradation. ICP-based systems can also include other signal conditioning features, such as gain, filtering, and self-test features.

### What are terms like IEPE and CCLD?

IEPE (integrated electronics piezoelectric) and CCLD (constant-current line-drive) are non-proprietary terms for ICP and completely compatible.

### Does a sensor need to be a piezoelectric type to work with ICP® systems?

Not always. ICP-compatible interfaces for non-piezoelectric transducers are in common use. Common examples include microphones with preamplifiers including the popular PCB model 378B02 for precision acoustics, PCB 130F20 for array acoustics and The Modal Shop's LaserTach™ for rotational speed.

### Do I always need an external ICP® Sensor Signal Conditioner with my system?

Maybe not. The ability to power and condition signals from ICP-compatible devices have been included in lab and field-based instruments for decades. Sound and vibration analyzers and digitizers from a wide range of manufacturers including HP, Agilent, VTI Instruments, Siemens PLM Software (formerly LMS International), National Instruments, Crystal Instruments, Data Physics, m+p international, Dactron, SKF, Rockwell/Entek, CSI, Bruel & Kjaer and many more. Check the specifications or manual of the particular instrument, and if possible check the instrument itself to make sure that the option is available.

### How do I select the right ICP® Sensor Signal Conditioner?

Start by selecting the appropriate number of channels of course, keeping in mind that each triaxial sensor requires three separate channels of conditioning. Options are available for AC (line), DC, USB, and battery power. Most conditioners we rent are general enough for a variety of testing, but if your frequency or amplitudes are on the high or low end, make sure to verify the frequency and noise specifications. BNC connections are common, and a 50-pin connection is also offered for large-channel systems. Other options available include:

- Gain: Scale weak signals to maximize output. Available in fixed 10x and 100x selections, or programmable gain in various steps (e.g., 0.1 steps)
- Filter: Eliminate high frequency noise with a low-pass filter. Eighth order Elliptical filtering with over 500 cutoff frequency choices. Available on the 481A Bundle in rental. (PCB manufactures units with Butterworth filtering, inquire if interested)
- TEDS: Read and write transducer information with TEDS-enabled sensors. (More information on TEDS on Page 16)

### Why do some ICP Sensor Signal Conditioners have adjustable current?

Current between 2 and 20 mA are available. The majority of sensors work with the minimum current, but some specialty units require additional current. Additionally, to extend life in battery powered situations and lower noise (best resolution), use lower current ranges. To drive long lengths of cables (to several thousand feet), adjust the current up to 20 mA maximum.

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

## Mixed Mode Signal Conditioners

These units provide ICP Conditioning as well as various conditioning options for Bridge/Differential, power for Variable Capacitance DC sensors and Charge. More options exist for charge-mode piezoelectric sensors without internal electronics – see FAQ below.



478B05



482C16

Model	Manufacturer	Channel Count	Gain	Low Freq Response (-5 %)	High Freq Response (-5 %)	Broadband Noise ( $\mu$ V rms)	Power	Input Type(s)	Output Type(s)	Mass (kg)	ICP	Bridge/Diff	VC	Charge <sup>2</sup>	\$/30 day
<b>478A01</b>	PCB	1	1x	DC	2 kHz	8	(3) 9 V, 20 hr	4 pin microtech	BNC	0.32			√		240
<b>478B05</b>	PCB	3	1x	DC	2 kHz	30	AC	3x 4 pin microtech	BNC	0.91			√		480
<b>Model 136</b>	Endevco	3	0x–1000x	DC	50 kHz	20	AC	9-Pin "D"	BNC	1.81		√	√		640
<b>482C27</b>	PCB	4	0.1x–2000x <sup>3</sup>	0.05 Hz <sup>3</sup>	100 kHz	50	AC	8-socket DIN <sup>3</sup>	BNC	1.1	√	√	√		990
<b>483C28</b>	PCB	8	0.1x–2000x <sup>3</sup>	0.05 Hz <sup>3</sup>	50 kHz	50	AC	8-socket DIN <sup>3</sup>	BNC	3.18	√	√	√		1980
<b>443B102<sup>1</sup></b>	PCB	1	0.1x–1000	DC	200 kHz	3	AC	BNC	BNC	0.66	√			√	840
<b>4418</b>	Endevco	1	1x 10x 100x	25 kHz	50 KHz	20	Internal Lithium Ion	Binder 09-0416-00-05	BNC	0.38		√			200

1 – Requires chassis to house and power signal conditioning module

2 – Additionally, PCB series 422E charge converters can be used with any ICP conditioner to power charge mode sensors

3 – Mixed-mode conditioners that also power ICP mode sensors, specs are shown for Bridge/Differential mode.

### How do I power a charge mode sensor?

Charge mode accelerometers do not require an external power source like ICP accelerometers. When mechanical stress is applied, a high impedance charge signal is generated from the piezoelectric sensing element. The high impedance signal requires conversion to a low impedance voltage signal prior to being analyzed by data acquisition or readout devices. The conversion can be done in two ways:

1. With a laboratory style charge amplifier.
2. With an in-line charge converter (PCB Series 422E) and ICP power source.

Charge amplifiers typically include settings that allow for gain/range adjustment. Other options may include filtering, signal integration and time constant adjustment for low frequency measurements. In-line charge converters have a fixed conversion factor (ie – 1 mV/pC or 10 mV/pC) and require power from an ICP signal conditioner.

### What is DC offset?

Because MEMS accelerometers can measure static (constant) acceleration, the DC offset voltage will be affected by the positional alignment relative to the Earth's gravity. When the sensitive axis of the accelerometer is not aligned with gravity, the output will equal the zero-g offset voltage on the PCB calibration certificate. If the sensitive axis of the accelerometer is aligned with gravity, the output will be equal to the bias voltage plus 1g of output. Remember, to take advantage of the DC response of MEMS accelerometers, the readout device and conditioner (if used) must be in a DC coupled state.

### Do I need a signal conditioner for a VC MEMS DC sensor (series 3711, 3713 and 3741)?

Depending on the type of MEMS sensor you may not need a specific signal conditioner to power the sensor. Since most PCB VC MEMS accelerometers contain a built-in voltage regulator, they may also be powered from any 6 to 30 VDC power source without adversely affecting performance, making them simple to use. PCB offers signal conditioner models 482C27 (4-channels) and 483C28 (8-channels) as VC MEMS power sources. Other acceptable power units include automotive or marine batteries, DC voltage laboratory supplies and low-voltage PC board voltage supplies. Consult individual model product manuals for additional powering details.

### What signal conditioner do I need for a Piezoresistive MEMS sensor (series 3501, 3503, 3641, 3651 and 3991)?

PR MEMS sensors operate on a fully active Wheatstone bridge configuration. Because of this PR accelerometers should be powered with a regulated voltage source since sensitivity is proportional to excitation voltage. The recommendation is to use the excitation voltage listed on the calibration certificate to obtain the calibrated sensitivity value. PCB signal conditioner models 482C27 and 483C28 are commonly used to power piezoresistive MEMS sensors. PCB signal conditioner models 482C27 and 482C28 can be used to power piezoresistive MEMS sensors.

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

### 440 Module Signal Conditioner Cards

440 Module Signal Conditioner cards are used with the older 440 Series which require a chassis and power card. These traditionally are rented for users of existing 440 Series conditioning systems.



443B102



441A13 & 2 x 442A104

Model	Manufacturer	Channel Count	Gain	Low Freq Response (-5 %)	High Freq Response (-5 %)	Broadband Noise ( $\mu$ V rms)	Power	Input Type(s)	Output Type(s)	Mass (kg)	Notes	\$/30 day
<a href="#">443B102<sup>2</sup></a>	PCB	1	0.1x-1000x	0.2 Hz	200 kHz	3	AC	BNC	BNC	1.45	Requires 2 chassis slots. Charge and ICP	840
<a href="#">442A101<sup>2</sup></a>	PCB	1	1x 10x 100x	DC	100 kHz	9.11	AC	BNC	BNC	0.735	Requires 1 chassis slot	240
<a href="#">442A104<sup>2</sup></a>	PCB	4	1x 10x 100x	0.5 Hz	100 kHz	3.5	AC	BNC	BNC	0.89	Requires 1 chassis slot	240

1 – Includes options to provide either computer or front panel display and control, bundle includes continuous gain control, velocity and displacement output for up to two channels, programmable Elliptical low pass filter (all channels), selectable ICP or voltage inputs, BNC inputs/outputs.

2 – All specs for ICP usage. Some conditioners may support other sensors types as noted.

### Angular and 6 DoF Inertial Sensors by Endevco

In typical dynamic measurements, both acceleration and angular rate data are essential parameters needed to fully characterize the complex behavior of a moving object. Until recently, engineers could only gather information using linear accelerometer, but the massive array of sensors required to collect rotational data can be impractical due to the expense and space required. With Endevco's angular rate and six degree of freedom (6 DoF) sensors, professionals in automotive and aircraft development are now able to easily measure linear and rotational dynamics that previously required multiple sensors much more space, and longer setup.

Model 7310A  
Angular Rate



Model 7360A  
6DOF Sensor



Model 7930  
Triax & 6DOF  
mounting block



<a href="#">7310A-18K-120</a>	Angular rate only sensor. Ranges of $\pm 18000$ deg/second. 10 ft cable to pigtail, requires 5-16 VDC power	\$170
<a href="#">7310A-8K-120</a>	Angular rate only sensor. Ranges of $\pm 8000$ deg/second. 10 ft cable to pigtail, requires 5-16 VDC power <a href="#">7310A-8K-240</a> 20 ft cable (\$150)	\$170
<a href="#">7310A-1K5-120</a>	Angular rate only sensor. Ranges of $\pm 1500$ deg/second. 10 ft cable to pigtail, requires 5-16 VDC power	\$170
<a href="#">7310A-100-120</a>	Angular rate only sensor. Ranges of $\pm 100$ deg/second. 10 ft cables to pigtail, requires 5-16 VDC power <a href="#">7310A-100-300</a> 30 ft cable (\$150)	\$170
<a href="#">Series 7360A</a>	6 DoF measurement sensor. Compact package with 2 cables. DC acceleration response with measurement ranges from $\pm 2$ to $\pm 500$ g and angular rate ranges from $\pm 100$ to $\pm 18000$ deg/second. Cables terminate in pigtail, requires 7-36 VDC power. Please call for available ranges and pricing.	Call
<a href="#">7930</a>	Triaxial and 6DOF mounting block for 7310 and 7264H	\$80

### Additional Electronics

<a href="#">401B04</a>	ICP <sup>®</sup> Sensor Simulator, use in place of an ICP <sup>®</sup> sensor to accept test signals from voltage sources including a voltage function generator. Used to connect voltage source into channel with fixed ICP conditioning or to verify signal conditioning settings, cable integrity, and tune long lines for optimum system performance. Requires ICP power.	\$70
<a href="#">401A05</a>	Low-noise ICP <sup>®</sup> load, used for signal conditioner noise testing	\$70

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

High Temperature, Charge Output Accelerometers

Prices in US\$ per 30-day rental

Charge output accelerometers directly output an electrostatic charge signal proportional to acceleration. These sensors do not contain built-in signal conditioning electronics. External signal conditioning is required to interface their generated measurement signals to readout or recording instruments. The sensors' charge output signals can be conditioned with either a laboratory-style, adjustable charge amplifier or an in-line fixed charge converter (such as 422E series below).



☐ - High Temp sensors to use the 422E3X series when the temperature exceeds 600 °F    ☐ - Endevco Manufactured Accelerometer

	Amplitude Range (± g pk)	Sensitivity (pC/g)	Frequency Range (10%)	Mech. Shock Limit (± g pk)	Temperature Range (°F)	Connector Type/Location	To connect to BNC, use cable type (rented separately)	To connect to 10-32 used in 422E series, use cable type (rented separately)	Sensor Mass (grams)	Mounting	\$/30 day
357B11 uniaxial	2 300	3	16 000	10 000	-95 to +500	side 5-44	003C	003A	2	5-40 s	\$100
357B14 uniaxial	2 300	3	16 000	10 000	-95 to +490	top 10-32	003C	003A	2	5-40 s	100
357B03 uniaxial	2 000	10	16 000	12 000	-95 to +500	side 10-32	003C	003A	11	10-32 t	82
357B04 uniaxial	2 000	10	16 000	12 000	-95 to +500	top 10-32	003C	003A	11	10-32 t	92
J357B04 uniaxial	2 000	10	16 000	12 000	-95 to +500	top 10-32	003C	003A	11	10-32 t	104
357A09 uniaxial	2 000	1.7	13 000	10 000	-100 to +350	side 3-56	003C	003A	0.6	adhesive	126
357A09/NC uniaxial	2 000	1.7	13 000	10 000	-100 to +350	side 3-56	003C	003A	0.6	adhesive	104
2222C uniaxial	1 000	1.4	8 000	10 000	-100 to +350	side 10-32	003C	003A	0.5	adhesive	290
357B53 uniaxial	150	100	3 500	2 000	-95 to +550	side 10-32	003C	003A	51	10-32 t	190
357A63 uniaxial	5 000	0.53	10 000	5 000	-65 to +900	side 10-32	003C	003A	11	5-40 t	420
357B61 uniaxial	1 000	10	5 000 <sup>1</sup>	5 000	-65 to +900	side 10-32	023A hardline cable + 003A	023A hardline cable + 003A	30	10-32 t	424
357B61/NC uniaxial	1 000	10	5 000 <sup>1</sup>	5 000	-65 to +900	side 10-32	023A hardline cable + 003A	023A hardline cable + 003A	30	10-32 t	254
356A70 triaxial	500	2.7	7 000	5 000	-95 to +490	(3) side 5-44	(3) each 098AG*AC	(3) each 098AG*EB	7.9	10-32 s	240

Notes: <sup>1</sup> -357B61 frequency range specified to +5%  
 °F: -95, -65, 0, 490, 500, 550, 900  
 °C: -70, -54, -18, 254, 260, 287, 482  
 t: tapped hole    s: integral stud

- Measurement resolution and low-frequency response are dependent upon noise floor and discharge time constant of the signal conditioning and readout systems used
- To use with standard ICP<sup>®</sup> signal conditioning, use 422E Series listed below.

422E Series Low-Noise In-Line Charge Amplifiers (Converters)

422E Series units are used with charge mode output sensors (generally pC/g to interface to ICP power. Output voltage for the 422E0x or 422E1x converters is ±2.5 V pk. Output voltage for the 422E5x converters is ±5 V pk. temperature range: -65 to +250 F. Use with low noise (098-style) cable to connect from sensor to 422E series 10-32 input. BNC output.

Used with	Output (V pk)	-5% Cutoff frequency	Nominal Charge Conversion (mV/pC) / Input Range (pC)				\$80 each per 30 day
			0.1 / ± 25 000	1 / ± 2 500	10 / ± 250	100 / ± 25	
Charge Output Sensors to 600 °F / 316 °C	± 2.5	0.5 Hz	422E04	422E03	422E02	422E01	
	± 2.5	5 Hz	422E14	422E13	422E12	422E11	
	± 5	5 Hz	422E54	422E53	422E52	422E51	

422E3x Series units are used with ultra high temperature pC/g-output charge mode sensor, such as the 357B61, to interface to ICP<sup>®</sup> power. Output voltage: ±2.5 V pk, temperature range: -65 to +250 °F. Use with low noise (098-style) cable to connect from sensor to 422E series 10-32 input. BNC output

Used with	Output (V pk)	-5% Cutoff frequency	Nominal Charge Conversion (mV/pC) / Input Range (pC)				\$76 each per 30 day
			0.1 / ± 25 000	1 / ± 2 500	10 / ± 250	100 / ± 25	
Sensors above 600 °F / 316 °C	± 2.5	5 Hz	422E38	422E35	422E36	-	



What is the effective sensitivity and maximum measurable amplitude range for a charge-mode sensor and in-line converter pair?

Sensitivity is found by multiplying the actual sensitivity of the accelerometer (found on the calibration sheet) and the charge conversion of the converter (found etched on the converter or on the conformance sheet). If using the 422E0x or 422E1x series in-line charge amps, divide the ± 2.5 V voltage output by the net sensitivity calculated to yield the maximum g level measurable.

$$\begin{array}{c}
 \text{accelerometer sensitivity} \rightarrow \frac{3 \text{ pC}}{\text{g}} \times \frac{10 \text{ mV}}{\text{pC}} = \frac{30 \text{ mV}}{\text{g}} \text{ net sensitivity} \\
 \text{charge mode sensor and cable can be used in high temperature} \rightarrow \\
 \text{only use 422 converter unit in 250 °F maximum} \rightarrow \\
 \text{voltage output range of 422E0x and 422E1x units} \rightarrow \frac{2.5 \text{ V}}{30 \text{ mV/g}} = 83.3 \text{ g} \text{ maximum system measurable amplitude} \\
 \text{calculated net sensitivity} \rightarrow
 \end{array}$$

Are traditional charge mode amplifiers to condition charge-output sensors offered for rental?

We offer limited channel counts of 443A101 dual-mode vibration amplifier placed in a 440-series rack, but generally for larger quantities, traditional standalone charge-mode amplifiers are not currently offered at this time. 422E Series in-line units are available for rental, even in large quantities.

Are any accelerometers available to rent for temperatures above 500 °F / 260 °C?

To view what is available, visit our High Temperature System Properties Calculator here: [www.modalshop.com/HT-calc](http://www.modalshop.com/HT-calc). Most shown in the table above.

Digiducer®

Prices in US\$ per 30-day rental

Imagine plugging a high resolution, broad frequency piezoelectric accelerometer directly into your phone, tablet, or laptop, with no intermediary signal conditioning or data acquisition needed. Sounds simple, right?



**Benefits:**

- Works with Windows, iOS, Linux, Android, and macOS – no drivers required
- Eliminates need for DAQ and signal conditioning
- Independent software and VAR-supported to provide an easy to use Vibration Analyzer
- 24-bit resolution and flat response to 8 kHz
- Piezoelectric element provides high dynamic range and a proven design
- Rugged package with a simple integrated cable terminating in USB

**Software Dependent Features :**

- Sensitivity Recognition
- Frequency Spectrum
- Time Waveform
- Record/Export
- Cloud Storage
- Overall Vibe Level
- Route-Based
- Report Generation

**333D Series**

Our 333D Series Digital Piezoelectric Accelerometers are offered in several different models, all with 0.9–15000 Hz (±3 dB), 2–8000 Hz (±5 %), 131 gram mass, 1/4-28 mounting thread, hermetically sealed stainless steel housing with top exit. 24-bit ADC, connect to tablets, laptops, and more. Software not included.

	± 20 g pk	± 100 g pk	
Integral Cable Terminating in USB-A	333D01	333D04	\$180
Detachable M12 to USB-A cable	333D05	333D06	\$180
Detachable M12 to USB-C cable	333D05-C	333D06-C	\$180

**K333D0x**

Single Channel Vibration Monitoring Kit. System includes 333D0x Digiducer, magnetic mounting base, and system controller (choice of form function) with preinstalled software. \$500

DigiDAQ®

Want to use any ICP sensor with your phone, tablet, or laptop? The DigiDAQ® Series 485B39 is a pocket-sized, dual-channel ICP® (IEPE) and/or voltage digital signal conditioner providing just that capability. Available with cable terminating in USB-A or USB-C.



**Benefits:**

- Makes high quality measurement more accessible
- Pocket-sized ICP® to USB signal conditioning and analysis
- Analysis options from time domain to RMS to FFT and more
- Convenience of MEMs with the range and precision of piezoelectric
- No driver installation required
- Easily save and share data

**Features:**

- Portable sensor digitization
- 2 Channel ICP® digital signal conditioning
- 24-bit resolution with wide frequency range
- Windows, macOS, Android, and iOS compatible
- Integrated cable provides 1-piece solution
- Works with a variety of software packages

**485B39 Series**

Our 2-channel ICP sensor signal conditioners are offered in several different models, all with 2 BNC in and USB digital signal output. True plug and play analysis via with a hassle-free setup. View signals on any Windows, macOS, Android, and iOS devices.

	USB-C	USB-A	
ICP on both channels	485B29-C	485B29	\$200
ICP CH1, Voltage CH 2	IV485B29-C	IV485B29	\$200
Voltage on both channels	V485B29-C	V485B29	\$200

**K485B39**

Dual Channel Analysis Kit. System includes 485B39 and system controller (choice of form function) with preinstalled time and frequency analysis software. \$560

Digital Tools FAQ

**How do I get started?**

Check out our quickstart guide that can be found here: <https://modalshop.com/digital-sensing>

**Can I build my own scripts or applications for collecting and processing vibration signals from the 333D01 or 485B39?**

Yes, any number of programs can be used to generate custom programs to use the 485B39 or 333D01 with. Please go to the following link for examples of MATLAB® scripts, as well as LabView® and LabWindows® applications: <https://github.com/digiducer>

**Are there already any optimized software packages to use with the 333D01 or 485B39?**

Yes there are a number of optimized software packages that are ready out of the box for usage with the 485B39 or 333D01. Please go to the following link for an overview of software available: <https://www.modalshop.com/digital-sensing/products/software>

**What can I connect the 333D01 or 485B39 to?**

The 333D01 and 485B39 are compatible with Windows® 7 and up. Windows XP is compatible, though limited to 16-bit resolution with standard Windows audio drivers. They work with Mac® operating systems and iOS® mobile platform. For iOS devices with a lightning connector, Apple's Lightning to USB Camera Adaptor can be used. They are also compatible with both Android phones and tablets, through the use of a USB OTG cable.

**Do these devices have internal memory?**

Yes, for storing self-identifying information and calibration information. It cannot store vibration data. It is similar in concept to the IEEE 1451.4 TEDS (Transducer Electronic Data Sheet) standard.

**What is the communication method?**

USB 2.0 full speed, using USB audio Class 1 device protocols for easy communications. 5V device power supplied by USB bus.

When analysis of very low frequency motion or constant acceleration is required, a DC accelerometer is necessary. Unlike piezoelectric accelerometers, DC sensors respond to 0 Hz and are, therefore often referred to as DC response sensors.

3711 Series Uniaxial Variable Capacitance DC Accelerometers with Single-Ended Output

Prices in US\$ per 30-day rental

These units offer DC response, ideal for low-frequency structural behavior testing including braking, suspension, RLDA, and shock absorption studies. Units also feature built-in microelectronics and an internal voltage regulator conditioning electronics to which allow sensor operation from unregulated DC power sources. Mounting patterns, power, and cabling accessories are the same for 3701 and 3801 Series below.

	Range (± g pk)	Sensitivity (mV/g)	Frequency Range (± 10 %)	Resolution (g RMS)	Mech. Shock Limit (± g pk)	Excitation Voltage (VDC)	Temperature Range (°F)	Connector Type/Location	Housing	Sealing	Sensor Mass (grams)	\$/30 day
3711F11200G	200	6.75	DC – 2 500	0.006	5 000	5 – 32	-65 to +250 (-54 to +121 °C)	side 1/ 4-28 4-pin	Titanium	Hermetic	16.3	194
3711F1150G	50	27	DC – 2 000	0.001 5	5 000	5 – 32		side 1/ 4-28 4-pin	Titanium	Hermetic	16.3	194
3711F1130G	30	45	DC – 2 000	0.001	5 000	5 – 32		side 1/ 4-28 4-pin	Titanium	Hermetic	16.3	194
3711B1210G/010CA	10	200	DC – 1 500	0.001 2	3 000	6 – 30		10 ft cable⇒ 4-pin jack	Titanium	Hermetic	16.3	194
3711D1FA3G	3	700	DC – 150	0.001 1	5 000	5 – 30		side 1/4-28 4-pin	Titanium	Hermetic	14.5	220

- Each 3711 Series unit mounts via 2 x 0.116" through-hole locations. Rentals are supplied with (2) 081A133 mounting screws and one 080A152 mounting base/clip, as well as phase and amplitude calibration from 2 Hz to + 5 % frequency range.

3701 and 3801 Series Uniaxial Variable Capacitance DC Accelerometers with Single-Ended Output

Prices in US\$ per 30-day rental

These units also offer true DC response, with improved resolution for low-amplitude/low frequency measurements. Ideal for ride quality assessments, building/bridge and aerospace testing, and tilt and orientation measurements for feedback control and stabilization testing. These units also offer built in electronics allow measurement with unregulated DC voltage excitation.

	Range (± g pk)	Sensitivity (mV/g)	Frequency Range (± 10 %)	Resolution (g RMS)	Mech. Shock Limit (± g pk)	Excitation Voltage (VDC)	Temperature Range (°F)	Connector Type/Location	Housing	Sealing	Sensor Mass (grams)	\$/30 day
3801D1FB200G	200	10	DC - 800	0.001	3 000	5 – 30	-40 to +185 (-40 to +85 °C)	cable ⇒ 1/4-28 4-pin	Polymer	Epoxy	30	\$180
3701D3FA20G	20	100	DC – 500	0.000 08	3 000	16 – 30		side 1/4-28 4-pin	Titanium	Hermetic	17.5	150
3701G3FA3G	3	1 000	DC – 150	0.000 03	3 000	16 – 30		side 1/4-28 4-pin	Titanium	Hermetic	17.5	180

- Each capacitive unit mounts via 2 x 0.116" through-hole locations. Rentals are supplied with (2) 018A64 mounting screws and one 080A152 mounting base/clip as well as phase and amplitude calibration from 2 Hz to + 5 % frequency range.

Cabling for Uniaxial Single-Ended Output Sensors with ¼-28 4-pin Connection (Most 3711, 3701 and 3801 Series Units)

1/4-28 microtec plug [AY]	1/4-28 microtec plug [AY]			Pigtail [DZ]					
	ft.	010D Cable	\$/30 day	ft.	010P Cable	\$/30 day	ft.	034A Cable	\$/30 day
	10	010D10	32	10	010P10	24	5	034A05	19
	20	010D20	36	20	010P20	28	50	034A50	78
	30	010D30	46	30	010P30	36			
				50	010P50	44			

Accessories for Capacitive and single-ended units:

080A152	Easy mount clip, plastic (one included with each rental – price shown for extra) [Purchase price: \$15]	\$4
080A153	Easy mount triaxial block, plastic, 1.265" square	\$36

Signal Conditioning for Single-Ended Sensors (3701, 3711, 3713 and 3801 Series Units)

478A01	1-channel, battery-powered, unity gain signal conditioner. ¼-28 4-pin input connector, BNC output connector, and DC offset null adjustment.	\$240
478B05	3-channel, line powered, unity gain signal conditioner. Terminal block input connections, BNC output connectors, and per-channel DC offset null adjustment.	\$480

3713 Series Triaxial Variable Capacitance DC Accelerometers with Single-Ended Output

Prices in US\$ per 30-day rental

Measure low-frequency DC response on 3-axes simultaneously in a hermetically sealed titanium housing. Units also feature built-in microelectronics and an internal voltage regulator conditioning electronics to which allow sensor operation from unregulated DC power sources. Select appropriate 037 Cabling to mate to pigtail or 1/4-28 plug based on conditioning used.

	Range (± g pk)	Sensitivity (mV/g)	Frequency Range (± 3 dB)	Resolution (g RMS)	Mech. Shock Limit (± g pk)	Excitation Voltage (VDC)	Temperature Range (°F)	Connector Type/Location	Housing	Sealing	Sensor Mass (grams)	\$/30 day
3713F11200G	200	7	DC – 2 500	0.006	5 000	5 – 28		side 9-pin	Titanium	Hermetic	17.3	\$390
3713F1150G	50	27	DC – 2 000	0.001 5	5 000	5 – 28	-64 to +250 (-54 to +121°C)	side 9-pin	Titanium	Hermetic	22.7	390
3713F1110G	10	135	DC – 1 500	0.035	5 000	5 – 28		side 9-pin	Titanium	Hermetic	17.3	390
3713F112G	2	675	DC – 350	0.000 1	5 000	5 – 28		side 9-pin	Titanium	Hermetic	17.3	390

\*Calibrated range 2 Hz – 1000 Hz.

Cabling for 3713 series:

9 pin for DC triaxial [EN]	Pigtail [DZ]			[JS] Triple splice assembly with (3) 1-ft 4-cond. cables each with a 1/4-28 microtec plug [AY connectors]			[NN] Triple splice assembly with (3) 1-ft 4-cond. cables each with a mini 8-pin DIN [LT connectors]		
	ft.	037P Cable	\$/30 day	ft.	037A Cable	\$/30 day	ft.	037ENNN Cable	\$/30 day
	10	037P10	65	10	034A10	130	10	037EN010NN	86
	20	037P20	78	20	034A20	144	30	037EN030NN	120
	30	037P30	92	30	034A30	166			
	100	037P100	220						

3741 Series Uniaxial DC Accelerometers with Differential Output

Prices in US\$ per 30-day rental

3741 Series offer DC response with common mode noise rejection, commonly used in aerospace flutter and GVT testing. Units operate with standard bridge conditioning equipment, and operate as a full bridge type device which does not require bridge completion circuitry. 3741 units incorporate voltage regulation, and may therefore operate from an unregulated positive DC supply source.

	Range (± g pk)	Sensitivity (mV/g)	Frequency Range (± 10 %)	Resolution (g RMS)	Mech. Shock Limit (± g pk)	Excitation Voltage (VDC)	Temperature Range (°F)	Connector Type/Location	Housing	Sealing	Sensor Mass (grams)	\$/30 day
3741F12100G	100	27	DC – 2 500	0.006	5 000	5 – 32		10 ft cable⇒pigtail		Epoxy	9.9	\$160
3741F1230G	30	90	DC – 2 000	0.085	5 000	5 – 32	-65 to +250 (-54 to +121 °C)	10 ft cable⇒pigtail	Anodized Aluminum	Epoxy	9.9	160
3741F122G	2	1350	DS – 350	0.00006	5 000	5 – 32		10 ft cable⇒pigtail		Epoxy	9.9	160

- Each 3741 Series unit mounts via 2 x 0.125" through-hole locations. Rentals are supplied with (2) 081A103 mounting screws, as well as phase and amplitude calibration from 2 Hz to +5 % frequency range.
- 3741 Units may be used in single-ended operation by disconnecting and floating the white wire (- Signal) and attaching the yellow wire (+ Signal) to ground. In this "pseudo differential" method, sensitivity remains the same but there is a 2.5 VDC offset on the output.
- Aluminum triaxial mounting block for 3741 Series: [080A208](#)

Endevco 7284A Series Lightly Damped Piezoresistive High-g Triaxial Shock Accelerometer

Piezoresistive (PR) accelerometers are ideal for measuring impacts and shock events. Typical applications include automotive crash testing, commercial drop testing, and high g weapons testing.

	Range (± g pk)	Sensitivity (µV/g)	Frequency Range (± 1 DB typ)	Mech. Shock Limit (± g pk)	Excitation Voltage (VDC)	Temperature Range (°F)	Connector Type/Location	Housing	Sensor Mass (grams)	\$/30 day
7284A-20K-120	20 000	4/8	DC – 10 kHz	60 000	5	-67 to +250	10 ft cable ⇒ pigtail	17-4 PH CRES	3.6	900
7284A-60K-120	60 000	1.25/2.5	DC – 20 kHz	180 000	5	(-55 to +121 °C)	10 ft cable ⇒ pigtail	17-4 PH CRES	3.6	900

Line-Powered Signal Conditioning for bridge/differential sensors (including 3741, 3501 and 3503 Series units)

482C27	4-channel, incremental gain, Autozero. (4x) 8-pin mini DIN inputs (for bridge/differential) and (4x) BNC inputs (for ICP), (4x) BNC outputs.										\$1000
483C28	8-channel, incremental gain, Autozero. (8x) 8-pin mini DIN inputs (for bridge/differential) and (8x) BNC inputs (for ICP), (8x) BNC outputs.										1900
Model 136	3-channel, incremental gain, filtering, Auto-zero and shunt calibration. (3x) –pin female "D Connector" inputs and (3x) BNC outputs.										640

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

**▲** Mounting a transducer is key for field checks or calibrations. The items below include items to mate to popular items (1/4-28 and 10-32; handheld units also include an adaptor to mate to 5-40 threads). Additional adaptors are available for rental upon request. Not sure of mounting requirements? – provide a sensor list for us to verify.



394C06



699B02



REF2510R



4830B-CAL

Tools for Accelerometer and Channel Verification

Prices in US\$ per 30-day rental

394C06	Handheld shaker/accelerometer calibrator, 1 g at 159.2 Hz for accelerometers to 210-gram mass. <i>Note: do not use either for sensors with a max measurement level below 1 g!</i>	\$420
699B02	Handheld shaker/accelerometer calibrator, 1 g at 159.2 Hz for accelerometers to 250-gram mass. <i>Note: do not use either for sensors with a max measurement level below 1 g!</i>	420
REF2510R	Wilcoxon handheld shaker/accelerometer calibrator, 1 g at 61.4, 100 or 159.2 Hz for accelerometers to 250-gram mass. <i>Note: do not use either for sensors with a max measurement level below 1 g!</i>	600
4830B-CAL	Endevco accelerometer simulator, signal generator that simulates the electrical output of common types of accelerometers to troubleshoot, verify and calibrate measurement systems.	1000

Portable Products for Field Validation and Calibration of Accelerometers, Velocity, and Proximity Probes

Prices in US\$ per 30-day rental

These products provide expanded sensor verification across a wide frequency range up to full traceable calibration in a small ruggedized battery-powered system with a display.

5 Hz to 10 kHz,  
± 20 g max

0.7 Hz to 2 kHz,  
± 2 g max



9100D / 9200D



9110D / 9210D

Verify sensor performance, test alarms and measurement channels, store programmable test routines in memory	9100D \$2000	9200D \$2400
Above + provides ICP® conditioning for SUT with ability to view sensitivity, create cal certs, and provide pass/fail notification	9110D \$2800	9210D \$3440
Above + charge mode accel input and mounting accessories for test/measurement use	C9110D-T \$3000	-
Above with charge mode input but mounting accessories for industrial use	C9110D \$3000	-

Adaptors and conditioning are available for many sensor types, below are popular options. Contact us for items not shown!



9100-PPASH

9100-PPA01	Proximity probe adaptor kit, supports 5mm and 8mm size probes. Includes brackets for securing probes with 1/4 inch, 3/8 inch, 6mm, 8mm and 10mm diameter case threads. Includes Mitutoyo micrometer scaled in mils and 9100-PPA02 nickel-plated AISI 4140 steel target. <i>Note: metric available as MPPA01</i>	\$240
9100-PPASH	Proximity probe mounting adaptor kit for probes installed inside a 1/2" diameter housing, holder, sleeve or stinger. Also accommodates all 8mm proximity probe designs via supplied spare bracket.	600
9100-PS02	Modulated current and 4-20 mA vibration sensor USB power supply. Provides 24 VDC voltage output for connection to test sensor input of portable vibration calibrator.	200

Upgraded Calibration Options

Prices in US\$ per 30-day rental



9000A



9155D

9000A	SmartSine Calibration Driver used to control amp/shaker (not included) over a wide amplitude and frequency range for calibration of heavy sensors, vibration switches and more. Closed loop control requires reference accelerometer, not included.	\$1090
K9140D10	Portable Vibration Calibration System provides lab-style control, automation and databasing of calibrations with a C9110D, software, and accessories. Rental unit includes system controller with installed software.	5400
K9140-SW	9140 series vibration calibration software. Single seat license requires compatible Windows PC and TMS portable vibration calibrator. 9100-USB00 USB interface cable included.	1560
9155D	Accelerometer calibration workstation. Turnkey, fully automated system. The 9155 system is a global market leading comprehensive system that traceably calibrates the largest selection of accelerometers in accordance with ISO 16063-21. Many options exist, please contact us for details.	Call



**Do rented accelerometers include traceable calibration?**

Yes, ISO 17025 accredited (through A2LA) NIST-traceable calibration information is provided. Calibration certificates are provided electronically on a Modal Shop USB Drive in PDF format. Alternate methods of cal cert delivery are available including email or paper copies. The Modal Shop has internal calibration intervals of 1 year set for most test products. Per ANSI/ISO/IEC 17025:2000, it is the responsibility of the end-user (in this case, the renter) to determine the appropriate calibration interval under the requirements of its own quality system. Per this, calibration certificates of rented equipment have “calibrated on” dates, but blank “calibration due” dates. Rentals ship with a customer-specific expected return date in mind. For example, if equipment is expected out for 5 months, the last calibration date will be within the past 7 months. Calibration to additional standards (e.g. Z540 or specific FAA requirements) is available at an additional charge

**Is post-test calibration available?**

Yes. We understand that some critical tests require both pre-test calibration and post-test calibration be performed to ensure that measurements are accurate. For additional fees, accelerometers can be calibrated prior and post-test at The Modal Shop to provide you with this important information. See below for the common A2LA accredited calibration codes.

**What specific calibration information is included with a particular sensor?**

Most common piezoelectric accelerometers include sensitivity, frequency and phase information starting at least 10 Hz to upper 5 % of frequency range. Details can be found on specific pages for rental sensors on the TMS page. Certain units like most 393 Seismic Series accelerometers include low frequency calibration starting at 0.5 Hz. Low frequency or special calibration is available for any rental units for an additional fee.

Accredited Calibration Services

The Modal Shop’s in-scope, in-house calibration laboratory holds accreditation to ISO / IEC 17025:2005 and ANSI / NCSL Z540-1-1994, internationally recognized standards which specify general requirements necessary to exhibit technical competence in carrying out various testing and calibration methods. Accordingly, The Modal Shop can be your partner in a well-documented transducer calibration program.



As part of this accreditation, The Modal Shop offers primary and secondary calibration of accelerometers, as well as services for condenser microphones, impulse force hammers, force sensors, and associated signal conditioning electronics.

Certificate Number 2649.01 Calibration Lab

Accelerometer Calibration Services

- **MCS-A001** Single axis accelerometer, amplitude and phase response from 5 Hz to upper 5% frequency. To start at 0.5 Hz, use code MCS-A001-A004 For custom frequency range use MCS-A001-SP
- **MCS-A001T** Triaxial accelerometer, amplitude and phase response from 5 Hz to upper 5% frequency. To start at 0.5 Hz, use code MCS-A001-A004T
- **MCS-A010** Secondary comparison calibration for Reference Accelerometer. 5 Hz to 10 kHz, can include conditioner. If electronic data requested, use code MCS-A013
- **MCS-35** Single axis accelerometer, 5 Hz to 20 kHz with sensor bias and resonance sweep to 50 kHz. For triaxial accelerometer, use code MCS-35T

Handheld and Portable Calibration

- ▲ **MCS-A009** Calibration of handheld calibrator, models 394C05, 394B06, and 394C06 or similar.
- **9100-CAL01** Calibration of 9100 Series Portable Vibration Calibrator.
- ▲ **MCS-56** Calibration of speakerphone.

Impact Hammer Calibration Services

- **MCS-H002** Calibration of 086 series instrumented hammer or similar.
- **MCS-H005** Calibration of 086 series instrumented hammer or similar. Includes data for up to six tips and one extender mass if provided.

▲ NIST traceable ● NIST traceable and accredited to ISO 17025.

Signal Conditioner Electronics Calibration Services

- **MCS-E001** Calibration of in-line charge converters 422E Series and equivalent. NIST traceable. A2LA accredited.
- **MCS-E004** Calibration of single channel signal conditioner 480 Series and equivalent. NIST traceable. A2LA accredited.
- **MCS-Exxx** Many multichannel signal conditioner calibrations with various options available

Shock Accelerometers

- **MCS-31** Single axis accelerometer amplitude linearity calibration, 5 amplitudes to maximum 10,000 g range. For triaxial accelerometer / 5 amplitudes, use code MCS-31T
- **MCS-53** Single axis accelerometer amplitude linearity calibration, 3 amplitudes to maximum 10,000 g range For triaxial accelerometer / 3 amplitudes, use code MCS-53T
- **MCS-A022** Single axis amplitude and phase response calibration from 100 Hz to upper ±1dB frequency.

Acoustic Calibration Services

- ▲ **MCS-1** Calibration of 130 series array microphone/preamplifier pair.
- **MCS-2** Calibration of standard precision condenser microphones.
- **MCS-9** Calibration of precision microphone/preamplifier pair.
- **MCS-70** Calibration of precision microphone/preamplifier pair without removeable gridcaps.

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

**SYSCOM ROCK**

Prices in US\$ per 30-day rental

Ideally suited for large-scale vibration monitoring projects and vibration monitoring compliance, ROCK is highly autonomous and quickly installed on site. A cable-free vibration recorder, just switch it on and log into your SCS (Syscom Cloud Software) account to start monitoring from off-site in no time.

The rugged design offers best-in-class IP65 ingress protection for temporary immersion under water and the system is tailored for harsh outdoor environments. The small footprint allows it to fit in crowded areas where space is of concern.

SYSCOM Cloud Software (SCS) is cloud-based and provides easy access to your vibration recordings from anywhere. Setup of your personalized SCS account is easy and takes less than a few minutes. Centralize all the information from your monitoring projects and provide an overview of all active ROCK monitoring projects at a glance. Automatic project reporting and comparison with compliance curves are key features of the SCS. Link any ROCK device to your account and start generating results in no time.

For a more detailed overview please visit the website at [www.modalshop.com/rental/rock](http://www.modalshop.com/rental/rock)

**KROCK-H Horizontal Mount ROCK** for ground/floor-mounted installation. \$680  
*Included:* **81000631** – Micro USB Cable, 1.8 m **74710129** – Carrying case, for up to 3 ROCK units  
**87000318** – USB charger, North American Plug **Calibration** – Documentation



**Horizontal Mount ROCK Options and Accessories:**

- 13100001** – Set of 3 Ground Spikes \$20
- 13100020** – Mounting Plate 56
- 87000321** – Extender Antenna, Remote LTE Cat-M1 Antenna, 2 m Cable 10
- 90001052** – Anti-theft Field Cover/Band 10

**KROCK-V Vertical Mount ROCK** for wall-mounted installation. \$680  
*Included:* **13100021** – Wall Mounting Plate **81000631** – Micro USB Cable, 1.8 m **Calibration** – Documentation  
**87000318** – USB charger, North American Plug **74710129** – Carrying case, for up to 3 units

**Vertical Mount ROCK Options and Accessories:**

- 87000321** – Extender Antenna, Remote LTE Cat-M1 Antenna, 2m Cable \$9
- 90001052** – Anti-theft Field Cover/Band 9

**Sonitus Standalone Dust Sensor Kit**



Continuous monitoring of PM10, PM4, PM2.5 and PM1 with email and text alerts, secure cloud-based reports with maps, in a simple to deploy setup with low maintenance. Heated inlet to minimize false readings from fog and mist, minimal maintenance with sensor swap option. Perfect for construction, demolition, mining, operations for oil and gas, foundries, blasting, rock drilling and more. Contact us for pricing, long term discounts apply.

**KEMS-DUST** Standalone Sonitus DustSens dust sensor for PM 1, 2.5, 5 and 10 with cabinet, heated inlet and 4G modem, AC powered. Includes Subscription to cloud data service during rental period. Contact Us

**KEMS-DUST+SOL** DustSens Solar Kit to suit application. Solar Panels with Mounting Options, Solar Controller, Batteries, Cases and Cabling. Contact Us

**KEMS-DUST+W** DustSens Weather Monitoring Addition, adds weather sensor to measure wind speed, direction and precipitation and accessories to DustSens system. Contact Us

**Larson Davis Cloud Connect Systems for Unattended Environmental Noise Monitoring, with Dust and Vibration Options**



Continuous monitoring with email and text alerts, secure cloud-based reports with maps, in a simple to deploy rugged setup with low maintenance Perfect for construction, demolition, mining, operations for oil and gas, foundries, blasting, rock drilling and more.

**Contact us for pricing**  
Long term discounts apply!

	<b>KEMS010</b>	<b>KEMS011</b>	<b>KEMS012</b>
Meter / IEC 61672-1 Standard	EM2030 / Class 2	821 / Class 1	831C / Class 1
Logging	1, 5, 10, 15 and 30 minute logging intervals		
1/3 and 1/1 Octave	Included in Rental Kits		
Add Sound Recording	<b>EMS010-SR</b>	<b>EMS011-SR</b>	<b>EMS012-SR</b>
Additional Parameters	Basic Logging	Adds Full set of Logging Parameters, Community Noise, Trending and More	Adds Remote Communication with Meter, Advanced Scheduling Tools, More Precise Event Detection and Alerts and More
Measurement Range	17-121 dBA	17-140 dBA	20-140 dBA (low noise to 6 dB available)
Power Options	Select between AC, Battery or Solar		
Communication/Data	Included in Rental Kits		
Add Weather	<b>KEMS-WTHR</b> (wind speed, direction, precipitation)		
Add Dust	<b>KEMS-DUST</b>		
Add Triaxial Ground Vibration	<b>KEMS-ROCK</b>		

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

ICP® Free-Field Blast Pressure Sensors

Prices in US\$ per 30-day rental



137B Series

These Pencil Probes are designed to measure shock waves caused from explosions in air found in defense and mining industries and in explosives research. They have an extremely fast microsecond response time, with resonant frequency above 400 kHz. Some include dual channel probes that allow an easy way to capture shock speed close to the explosion.

Blast	Range (psi)	Sensitivity (mV/psi)	Useful Overrange (psi)	Low Frequency Response (Hz)	Resolution (mpsi)	Diaphragm Material	Connector Electrical	Connect to BNC, use cable type (rented separately unless specified)	\$/30 day
137B21B	1 000	1	5 000	0.001	1	Invar	BNC jack	002T or 098ACAC	400
137B22B	500	10	1 000	0.001	0.02	Invar	BNC jack	002T or 098ACAC	400
137B24B	250	20	500	0.005	5	Invar	BNC jack	002T or 098ACAC	400
137B23B	50	100	100	0.01	2	Invar	BNC jack	002T or 098ACAC	400
137B29B	25	200	50	0.5	1	Invar	BNC jack	002T or 098ACAC	500

ICP® Dynamic Pressure Sensors

Prices in US\$ per 30-day rental

Piezoelectric pressure sensors are used for a variety of dynamic pressure measurements, such as cavitation, shock and blast waves, or hydraulic and pneumatic pressure fluctuations.



General Purpose 113 Series

Designed with extremely fast, micro-second response with a wide amplitude and frequency range. These units excel in high frequency applications, where minimum sensor diameter is required. Can be used in applications such as combustion studies, air blast shockwaves and airbag testing.

General Purpose	Range (psi)	Sensitivity (mV/psi)	Useful Overrange (psi)	Low Frequency Response (Hz)	Resolution (mpsi)	Diaphragm Material	Mounting Thread	Connector Electrical	Connect to BNC, use cable type (rented separately unless specified)	\$/30 day
113B23	10 000	0.5	20 000	0.0005	40	Invar	5/16 - 24	10-32 coaxial jack	002C or 098EBAC	160
113B22	5 000	1	10 000	0.001	20	Invar	5/16 - 24	10-32 coaxial jack	002C or 098EBAC	160
113B24	1 000	5	2 000	0.005	5	Invar	5/16 - 24	10-32 coaxial jack	002C or 098EBAC	160
113B26	500	10	1 000	0.01	2	Invar	5/16 - 24	10-32 coaxial jack	002C or 098EBAC	160
113B21	200	25	400	0.5	1	Invar	5/16 - 24	10-32 coaxial jack	002C or 098EBAC	160
113B27	100	50	200	0.5	1	Invar	5/16 - 24	10-32 coaxial jack	002C or 098EBAC	160
113B28	50	100	100	0.5	1	Invar	5/16 - 24	10-32 coaxial jack	002C or 098EBAC	160



Ground Isolated 102B Series

These units have all of the same features and benefits of the Series 113B, plus the added benefit of having their output electrically isolated from ground, which helps prevent ground loop problems.

Ground Isolated	Range (psi)	Sensitivity (mV/psi)	Useful Overrange (psi)	Low Frequency Response (Hz)	Resolution (mpsi)	Diaphragm Material	Mounting Thread	Connector Electrical	Connect to BNC, use cable type (rented separately unless specified)	\$/30 day
102B06	500	10	1 000	0.01	2	Invar	3/8 - 24	10-32 coaxial jack	002C or 098EBAC	250
102B16	100	50	200	0.5	1	Invar	3/8 - 24	10-32 coaxial jack	002C or 098EBAC	230
102B18	50	100	100	0.5	1	Invar	3/8 - 24	10-32 coaxial jack	002C or 098EBAC	230



High Sensitivity Dynamic Acoustic Pressure 106 Series

These units measure low-level pressure and high-intensity sound pressure levels, both acoustic and ultrasonic. These all-welded, stainless steel units are suited for monitoring pulsations, turbulence, and noise in hydraulic and pneumatic systems.

High Sensitivity	Range (psi)	Sensitivity (mV/psi)	Useful Overrange (psi)	Low Frequency Response (Hz)	Resolution (mpsi)	Diaphragm Material	Mounting Thread	Connector Electrical	Connect to BNC, use cable type (rented separately unless specified)	\$/30 day
106B	8.3	300	2000	0.5	0.0001	316L Stainless Steel	5/16-24	10-32 coaxial jack	002C or 098EBAC	390
106B50	5	500	-	0.5	0.07	316L Stainless Steel	3/4 - 16	10-32 coaxial jack	002C or 098EBAC	390
106B51	5	1 000	10	0.5	0.05	316L Stainless Steel	3/4 - 16	10-32 coaxial jack	002C or 098EBAC	390
106B52	1	5 000	-	2.5	0.02	316L Stainless Steel	3/4 - 16	10-32 coaxial jack	002C or 098EBAC	390

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.



**High Temperature Pressure Sensor**

PCB® High Temperature quartz dynamic pressure sensors are designed for operation at the highest temperatures. They are structured with quartz crystals and operate, without cooling, up to +750 °F (+399 °C) on compressors and pumps. See Page 22 for additional information on in line charge converters used with charge mode sensors.

High Temp.	Range (psi)	Sensitivity (mV/psi)	Useful Overrange (psi)	Low Frequency Response (Hz)	Resolution (mpsi)	Diaphragm Material	Mounting Thread	Connector Electrical	Connect to BNC, use cable type (rented separately unless specified)	\$/30 day
116B	1 000	5	2 000	0.005	5	Invar	-	10-32 coaxial jack	002C or 098EBAC	\$500

Other	Range (psi)	Sensitivity (mV/psi)	Useful Overrange (psi)	Low Frequency Response (Hz)	Resolution (mpsi)	Diaphragm Material	Mounting Thread	Connector Electrical	Connect to BNC, use cable type (rented separately unless specified)	\$/30 day
103B02	3	1 500	6	0.5	0.02	316L Stainless Steel	1/2 - 20	10-32 coaxial jack	002C or 098EBAC	390
121A45*	500	10	8000	0.5	0.003	316L Stainless Steel	1/4-18 NPT	2-Pin MIL-C-5015	012E or 052BR	530

\* Hazardous area approved, ATEX and CSA (C-US) NRTL

**Pressure Sensor Mounting Adaptors**

062A01	1/8-27 NPT external threads, 5/16-24 internal threads for 111, 112, and 113 series sensors.	\$14
062A07	1/2-14 NPT external threads, 3/4-16 internal threads for 106B50, 106B51, and 106B52 sensors.	\$60
062A06	Pipe thread adaptor, 1/2-14 NPT (for 106B)	\$34
061A04	Sleeve clamp, 4-40 cap screw (used in 103 Series models including 103A and 103A11)	\$5
063A02	Mounting adaptor for 137 Series Free-field blast probe	\$74
064B01	Water-cooled adaptor, sensor recess mount, 1/2-20 thread, 1.0" hex (for Series 111, 112 & 113)	\$280



**Can ICP pressure sensors measure static pressure?**

No. Just as ICP accelerometers measure dynamic response and not DC/static acceleration (e.g., Earth gravity), ICP pressure sensors measure only dynamic pressure variation. ICP pressure sensors can be used in a high static pressure environment, such as a pressurized hydraulic system, to measure pressure fluctuations within the system when at pressure. Dynamic pressure measurements include turbulence, blast, ballistics, hydraulics, pneumatics, and engine combustion under varying conditions. Measuring the static pressure of an air tank, for example, would not be a suitable application for an ICP pressure transducer.

**Dynamic Strain Sensor**

Prices in US\$ per 30-day rental

740B02	Reusable ICP piezoelectric strain sensors can be used for measurement of dynamic strain-displacement relationships and load predictions, or in modal analysis to assess structural integrity of aircraft during ground vibration testing and flight testing to determine high stress levels. Mounting is easy to a wide range of surfaces from painted metals, composites, plastics and more with a gel-type super glue, and may be re-used or reapplied multiple times. Removal is similar to an accelerometer with a debonding agent and a supplied removal tool. Calibration data is also provided.	\$170
--------	--	-------



**Industrial Machinery and Project Monitoring**

Prices in US\$ per 30-day rental

333D01	Digiducer – Piezoelectric USB Accelerometer. Digital accelerometer with integral USB interface cable, Channel A range ± 20 g	\$180
485B39	2 Channel ICP® sensor signal conditioner. 2 BNC in, USB digital signal output.	200
K333D01	Single Channel Vibration Monitoring Kit. System includes 333D01 Digiducer, magnetic mounting base, and system controller (choice of form function) with preinstalled vibration monitoring software.	500
K485B39	Dual Channel Analysis Kit. System includes 485B39 and system controller (choice of form function) with preinstalled time and frequency analysis software.	560
IV485B39	2-channel, USB-powered, sensor signal conditioner with USB digital output (24-bit A/D). ICP input on channel 1, voltage input on channel 2.	200
V485B39	2-channel, voltage inputs, USB-powered, sensor signal conditioner with USB digital output (24-bit A/D).	200
CoCo-70X-2	Designed for machinery predictive maintenance (PdM) usage The CoCo-70X is IP-67 rates with a 6.5 inch display. 2 input channels with 1 output channel and easy navigation for route collection.	3 000
CoCo-70X-4	4-channel CoCo-70X configuration. Includes capabilities in CoCo-70X-2	3 400
NDT Products	NDT Nondestructive Test, uses Resonant Acoustic Method to determine manufactured part integrity. Allows easy setup and test for product flaws in cast, powdered metal and stamped parts.	Call
687A01	Handheld digital vibration meter kit, includes accelerometer and cable assembly, magnet, and headphones. Unit is powered with included 9V battery and provides a display of overall acceleration in 50 Hz to 50000 Hz range to a maximum RMS of 20g or overall velocity in 10 Hz to 1000 Hz range to a maximum of 2 inches per second and complies with ISO2954 standard. Kit includes models 687A02 meter, 603C01 sensor, 050BQ006AC cable, 070A47 headphones, 080A131 magnet	530
VO622A01	IMI 622A01 piezoelectric sensor with velocity output (VO) option, 100 mV/in/sec., top exit, 2-pin connector	100

086 Series ICP® Modally Tuned® Impact Hammers

Prices in US\$ per 30-day rental



	Force Range (± lbf pk)	Sensitivity (mV/lbf ± 15 %)	Typical Max Frequency (Hz)	Effective Mass (lb)	Length (in)	Includes <i>(for full details including model numbers, see website)</i>	Typical Uses	\$/30 day
086E80	50	100	12 000+	0.17	4.2	10 ft cable with BNC adaptor, handle assembly, case	Disk drives, circuit boards, turbine blades	300
086C01/TLD086C01	100	50	10 000	0.23	8.5	Extender mass, 4 tip ranges	Lightly damped panels and frames	200
086C02/TLD086C02	100	50	8 000	0.34	8.5	Extender mass, 4 tip ranges	Machine tool parts, small engines	190
086C03/TLD086C03	500	10	8 000	0.34	8.5	Extender mass, 4 tip ranges	Car frames, engines	180
086C04/TLD086C04	1 000	5	8 000	0.34	8.5	Extender mass, 4 tip ranges	Car frames, engines	190
086D05/TLD086D05	5 000	1	5 000	0.7	9	Extender mass, 4 tip ranges	Light trucks, pumps, turbines	200
086D20/TLD086D20	5 000	1	1 000	2.4	14.5	4 tip ranges	Tool/Turbine foundations, storage tanks	390
087B50	5 000	1	500	12.1	16	2 tip ranges (grey supersoft omitted, use brown tip)	Heavy foundations, ships, buildings	550
086D50	5 000	1	500	12.1	35	2 tip ranges (grey supersoft omitted, use brown tip)	Heavy foundations, ships, buildings	680
086M92-ES	500	10	call		16	4 tip ranges, foot pedal trigger, AC/DC power, cables	Repeatable impacts for industrial use	1240
086C09	500	10		3.5	9.7		Repeatable impacts for modal applications	1200
088A	500	10	4 000		14.2	4 tip ranges, foam grip	Modal Punch to reach inaccessible areas	580

**Note:** If new within the past year, hammers from PCB include only calibration data from one tip type. Hammers calibrated by The Modal Shop include sensitivity for every type of tip provided. Please let us know when renting if you would prefer a full set of calibration information for your testing.

Dynamic Force Sensors

Prices in US\$ per 30-day rental

208 Series ICP® Sensors



General purpose quartz force sensors measure dynamic tension and compression used in impact, drop and materials testing. Also used in dynamic shaker testing: mount force sensor to object under test and connect to shaker via stinger.

All units are stainless steel, 22.7 gram mass, have a side 10-32 coaxial jack, have a temperature range of -65 to +250 °F (-54 to +121 °C), include impact cap 084A03 and 10-32 mounting stud 081B05. Use 003C-style cable to mate to connect to BNC. Metric mounting stud M081A62 available upon request.

	Meas. Range (Compression) lb (N)	Measurement Range (Tension) lb (N)	Sensitivity mV/lb (mV/N)	Broadband Resolution lb-RMS (N-RMS)	Lower Frequency Response (-5 %)	Max. Static Force (Compression) lb (kN)	Max. Static Force (Tension) lb (kN)	\$/30 day
208C01	10 (44.5)	10 (44.5)	500 (112)	0.000 1 (0.000 45)	0.01 Hz	60 (0.27)	60 (0.27)	106
208C02	100 (445)	100 (445)	50 (11.2)	0.001 (0.004 5)	0.001 Hz	600 (2.7)	500 (2.2)	106
208C03	500 (2 224)	500 (2 224)	10 (2.25)	0.005 (0.02)	0.000 3 Hz	3 000 (13.5)	500 (2.2)	106
208C04	1 000 (4 448)	500 (2 224)	5 (1.12)	0.01 (0.044)	0.000 3 Hz	6 000 (26.7)	500 (2.2)	106
208C05	5 000 (22 240)	500 (2 224)	1 (0.225)	0.05 (0.222)	0.000 3 Hz	8 000 (35.6)	500 (2.2)	106

ICP dynamic force rings and impact sensors

200C20	ICP® quartz force sensor, impact, 20k lb comp., 0.25 mV/lb, 10-32 ele. conn., stainless steel construction, hermetically sealed.	\$360
200C50	ICP® quartz force sensor, impact, 50k lb comp., 0.10 mV/lb, 10-32 ele. conn., stainless steel construction, hermetically sealed	620

Cabling and Accessories for High Channel Count Tests

Prices in US\$ per 30-day rental

080B40	Cable, 10 ft with 3-pin mounting pad to IDC connector to patch panel <i>[Use with 333B, 333A, and 336 series. Not 333B32]</i>	\$14
080B55	Triaxial mounting block, outside mount	12
070C29	16-channel input patch (1/2" x 7" x 1.5"), (16) IDC and (16) BNC inputs to (1) DB-50 connector	110
009H25	Shielded 16-channel ribbon cable, DB50 pin connector both ends, mates 070C29 to 440 or another panel, 25 ft	300
009H50	Shielded 16-channel ribbon cable, DB50 pin connector both ends, mates 070C29 to 440 or another panel, 50 ft	400
009H100	Shielded 16-channel ribbon cable, DB50 pin connector both ends, mates 070C29 to 440 or another panel, 100 ft	520
009GC	DB50, 50-pin gender changer, 50-pin female each side	14
009L05	Shielded 4-channel output cable, HP VXI to 4 BNC plugs, 5 ft	160
009S08	Shielded 4-channel output cable, HP VXI to HP VXI connectors, 8 ft	140

Productivity Tools for Large Channel Test Systems



8032S

400B76	TEDS sensor interface kit. Enables communication to TEDS sensors over PC USB interface. Includes Windows software, USB adaptor, and 10-32 microdot cable. Supports IEE 1451, P1451 and LMS templates.	\$400
8032S	AirRide test fixture support. Air spring to support and isolate structures for modal testing; several may be used to test large structures. Offers typical mounting frequency of 2.88 Hz for 650-lb load. 1790 lb max capacity per support.	380

Shakers / Modal Exciter Kits

Prices in US\$ per 30-day rental

The Modal Shop's expanded line of electrodynamic exciters are ideal for a wide range of tests, from small component and sub-assembly testing to large aerospace modal analysis excitation. Rental kits include stinger kits, shakers with trunnion bases, amplifiers, cabling and power and shaker/amp interconnect accessories. Connect to an external signal source (not included) or rent additional items to complete a measurement setup, ranging from impedance heads (Page 34) or force sensor (Page 17), or a complete closed loop vibration control system (Pages 49-53).

**Miniature Electrodynamic Inertial Shaker Kit**



This extremely compact lightweight force generator mounts directly to the test structure or through a force sensor and can be operated in any orientation, making it well suited for modal or general excitation applications.

	Max Sine Force ± lbf (N) pk	Stroke In (mm) pk-pk	Minimum Frequency (Hz)	Maximum Frequency	Shaker Model	Amplifier Model	Shaker and Amp Weight lb (kg)	Stinger Kit(s)	Other Accessory Kit(s)	Shipment Weight, lb (kg)	\$/30 day
K2002E01	2 (9)	0.35 (8.9)	20	3 000	2002E	2000E	0.56 (0.25) / 0.7 (0.32)		√	16 (16)	900

**Miniature SmartShaker™ Kits**



The Modal Shop Miniature SmartShaker™ kits include a miniature electrodynamic exciter with a new generation of ultra compact precision power amplifier built into the base. There is no need for a separate large lab-grade power amplifier - just plug the excitation signal from a dynamic signal analyzer or function generator directly into the BNC on the base of the shaker. Units include a DC power supply with a standard AC plug, but can be run directly from any 12-21 VDC supply.

	Max Sine Force ± lbf (N) pk	Stroke In (mm) pk-pk	Maximum Frequency (Hz)	Shaker Model	Amplifier Model	Shaker and Amp Weight lb (kg)	Cooling Package	Trunnion	Stinger Kit(s)	Other Accessory Kit(s)	Shipment Weight, lb (kg)	\$/30 day
K2004E01	4.5 (20)	5 (0.2)	11 000	K2004E01	Integrated	7 (3)		√	√	√	16 (7)	1 060
K2007E01	7 (31)	13 (0.5)	9 000	K2007E01	Integrated	7 (3)		√	√	√	16 (7)	1 060

**Modal Shaker Kits**



In addition to the miniature SmartShaker, The Modal Shop offers shakers and kits with force ratings up to 445 N (100 lbf), perfect for a wide range of modal analysis applications. Kits are complete with everything from amplifiers to power the shaker, to stinger kits to connect to your test object; just supply a signal source (not included). Need help selecting a shaker system? We offer a Modal Shaker Selection Guide online, or feel free to contact us for assistance!

	Max Sine Force ± lbf (N) pk	Stroke In (mm) pk-pk	Maximum Frequency (Hz)	Shaker Model	Amplifier Model	Shaker/Amp Weight lb (kg)	Cooling Package	Trunnion	Stinger Kit(s)	Other Accessory Kit(s)	Shipment Weight, lb (kg)	\$/30 day
2060E												
K2025E013	13 (58)	18 (0.7)	9 000	2025E	2100E23-400	13 (6) / 9 (4)		√	√	√	38 (17)	2 080
K2025E013-HF	13 (58)	13 (0.5)	20 000	2025E-HF	2100E23-400	11 (5) / 9 (4)		√	√	√	38 (17)	2 250
K2060E030	30 (133)	36 (1.4)	6 000	2060E	2100E23-400	37 (17) / 9 (4)		√	√	√	64 (29)	2 550
K2060E060	60 (267)	36 (1.4)	6 000	2060E	2150E09	37 (17) / 81 (37)	√	√	√	√	169 (77)	3 560

**Vibration Shakers / Dual Purpose Shaker Kits**



In addition to our Portable Vibration Calibrator products 9100D and 9110D (see Page 26) designed to calibrate accelerometers and prox probes in the lab or in the field, The Modal Shop units below include a large armature and platform table to support payloads up to 10 lb, ideal for traditional vibration control testing of components and subassemblies. Through-hole armature design also allows experimental modal testing via stinger attachment. Head expander and horizontal table options are available for larger and heavier objects.

	Max Sine Force ± lbf (N) pk	Stroke In (mm) pk-pk	Maximum Frequency (Hz)	Shaker Model	Amplifier Model	Shaker/Amp Weight lb (kg)	Cooling Package	Trunnion	Stinger Kit(s)	Other Accessory Kit(s)	Shipment Weight, lb (kg)	\$/30 day
2075E												
K2025E-HF	13 (58)*	12.7(0.5)	20 000	2025E-HF	2100E23-400	11 (5) / 9 (4)		√			38 (17)	1 940
K2075E040	40 (178)	25 (1)	6 500	2075E	2100E23-400	35 (16) / 9 (4)		√	√	√	64 (29)	2 850
K2075E075	75 (344)	25 (1)	6 500	2075E	2050E09	35 (16) / 81 (37)	√	√	√	√	169 (77)	3 980
K2110E110	110 (489)	25 (1)	6 500	2110E	2050E09-FS	56 (25) / 81 (37)	√	√	√	√	189 (86)	4 640
K2500E500	500 (2224)	25 (1)	4 500	2500E	2050E12-7	475 (215) / 280 (170)	√	√	√	√	900 (410)	9 400

\*Force limited to 7 lbf from 14 000 to 20 000



### Horizontal Table Vibration Shaker Kits

These kits are designed to test objects larger and/or heavier than what can be directly mounted to a particular shaker. Additionally, some test specifications may require test objects to be oriented in a specific direction relative to gravity which is facilitated with the larger table. Ideal for testing items like geophones, performing general stress screening, or qualification testing per SAE or MIL-STD. The K2500E-HT can be used with the Modal-Pod™ accessory as well. Note: these items are generally skidded and shipped via freight.

	Max Sine Force ± lbf (N) pk	Stroke In (mm) pk-pk	Maximum Frequency (Hz)	Shaker Model	Amplifier Model	Shaker/Amp Weight lb (kg)	Cooling Package	Trunnion	Stinger Kit(s)	Other Accessory Kit(s)	Shipment Weight, lb (kg)	\$/30 day
K2075E040-HT	40 (178)	25 (1)	4 500	2075E	2100E23-400	70 (31) / 9 (4)		√		√	90 (41)	4 420
K2075E-HT	75 (344)	25 (1)	4 500	2075E	2050E09	70 (31) / 81 (37)	√	√		√	200 (91)	5 340
K2110E-HT	110 (489)	25 (1)	4 500	2010E	2050E09-FS	100 (45) / 81 (37)	√	√		√	240 (108)	6 220
K2500E500-HT	500 (2224)	25 (1)	3 000	2500E	2050E12-7	475 (215) / 280 (170)	√	√	√	√	900 (410)	14 960

### Individual Shakers

<b>2002E</b> 2 lbf inertial	The Modal Shop miniature inertial shaker, 2 lbf (9 N) pk sine force, 0.35" pk-pk stroke, 0.141" x 1.5" mounting through-hole, includes cable, mounting screws, and spare fuses. <i>Amplifier 2100E23-100 drives to 2 lbf.</i>	\$ 480
<b>2004E</b> 4 lbf mini	The Modal Shop Miniature Shaker, 20 N (4.5 lbf) pk sine force, 5 mm (0.2") pk-pk stroke. Includes trunnion mounting base and 2110G06 stinger kit. <i>Rental includes heavy duty transportation case.</i>	490
<b>2007E</b> 7 lbf mini	The Modal Shop Miniature Shaker, 31 N (7 lbf) pk sine force, 13 mm (0.5") pk-pk stroke. Includes trunnion mounting base and 2110G06 stinger kit. <i>Rental includes heavy duty transportation case.</i>	490
<b>2025E</b> 13 lbf modal	The Modal Shop Modal Shaker, 58 N (13 lbf) pk sine force, 18 mm (0.7") pk-pk stroke, with adjustable collet stinger attachment and through-hole armature design, includes 2000X03 accessory kit and trunnion mounting base. <i>Amplifier 2100E23-400 drives system to 13 lbf peak.</i>	1 240
<b>2060E</b> 60 lbf modal	The Modal Shop Modal Shaker, 267 N (60 lbf) pk sine force, 36 mm (1.4") pk-pk stroke, with adjustable collet stinger attachment and through-hole armature design, includes 2000X03 accessory kit and trunnion mounting base. <i>Amplifier 2100E23-400 drives system to 30 lbf peak. To drive shaker to full 60 lbf peak, use amplifier 2050E09. Always use cooling package 2050E03 when driving shaker above 30 lbf pk sine force.</i>	1 740
<b>2075E</b> 75 lbf dual	The Modal Shop Dual Purpose Shaker, 334 N (75 lbf) pk sine force, 25.4 mm (1") pk-pk stroke, through-hole armature for stinger attachment/modal testing, 83 mm (3.25") diameter mounting surface. Trunnion base and 2000X03 accessory kit included. <i>Amplifier 2100E23-400 drives system to 40 lbf peak. To drive shaker to full 75 lbf peak, use amplifier 2050E09. Always use cooling package 2050E03 when driving shaker above 40 lbf pk sine force.</i>	1 860
<b>2100E11</b> 100 lbf modal	The Modal Shop Modal Shaker, 440 N (100 lbf) pk sine force, 25.4 mm (1") pk-pk stroke, with through-hole armature design, includes 2100E11-001 accessory kit and trunnion mounting base. <i>Rental includes heavy duty transportation case. Amplifier 2100E23-400 drives system to 35 lbf peak. Amplifier 2100E18 drives system to 100 lbf peak. Always use cooling package 2050E03 when driving shaker above 50 lbf pk sine force.</i>	1 960
<b>2110E</b> 110 lbf dual	The Modal Shop Dual Purpose Shaker, 489 N (110 lbf) pk sine force, 25.4 mm (1") pk-pk stroke, through-hole armature for stinger attachment/modal testing, 83 mm (3.25") diameter mounting surface. Trunnion base and 2000X03 accessory kit included.	2 300
<b>2500E</b> 500 lbf dual	The Modal Shop Electrodynamic Shaker, 2224 N (500 lbf) pk sine force, 25.4 mm (1") pk-pk stroke, 152 mm (6") diameter mounting surface. Trunnion base included. <i>Amplifier 2050E12-7 is rented separately and drives system to full peak, but cooling package 2000X12 required beyond 225 lbf pk sine force. Shipped via freight.</i>	5 200
<b>2050E01</b>	MB Dynamics Modal 50 Shaker, 50 lbf pk sine force, 1" pk-pk stroke, 4 kHz maximum, 55 lb weight, modal accessory kit included.	2 100

### Individual Amplifiers

<b>2000E</b>	Miniature Class-D Power Amplifier, clip and over-temperature detection, continuous gain adjustment, includes universal power supply.	\$680
<b>2100E23-400</b>	The Modal Shop SmartAmp™ Power Amplifier, 400 W, interlock and clip detection, continuous gain adjustment, 100-240 V line power. <i>Lightweight general purpose unit appropriate for standard duty testing. Features silent fanless operation and advanced features including real-time warning feedback for signal distortion and automatic shutdown of the supply signal for DC faults. Over-current and over-temperature protection prevent unexpected damages during testing. Safe Start feature avoids sudden shaker transients when the amplifier is powered up.</i>	1 030
<b>2050E05</b>	Linear Power Amplifier, selectable current/voltage mode, continuous gain adjustment, 100-240 V line power. <i>Classic general purpose linear amplifier. Includes voltage control mode, commonly used when performing burst random testing.</i>	1 100
<b>2100E18</b>	Power Amplifier, 2400 W, continuous gain adjustment. <i>An appropriate choice to drive 2100E11 shaker to full capacity. Forced air cooling is required when driving the 2100E11 to excitation levels above 50 lbf (27 N); use cooling kit 2050E03. Amplifier and cooling kit included in shaker kit K2100E100.</i>	1 100
<b>2100E18-230V</b>	Power Amplifier, 2400 W, continuous gain adjustment, 230V line power.	1 100
<b>2050E09</b>	Linear Power Amplifier, 900 W, selectable current/voltage mode, continuous gain adjustment. <i>200-240 V is required for the 2050E09 amplifier when used with a dual purpose platform shaker 2075E or 2110E. Renters are generally responsible for connecting a power plug for this amplifier. Contact us for more information.</i>	1 600
<b>2050E09-FS</b>	Linear Power Amplifier, 900 W, selectable current/voltage mode, continuous gain adjustment, 200-240V line power, internal DC field power supply.	1 600
<b>2050E12-7</b>	Power Amplifier system for 2500E shaker, 65V, 2600 VA output. Includes control panel with output voltage and current meter, adjustable output current limiting, and interlock. <i>Shipped via freight.</i>	4 200

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

**Shaker Accessories**

9000A	SmartSine Calibration Driver – calibrate heavy sensors over a wide amplitude and frequency range. Shaker not included. See page 28 for more info	\$1 090
2000X04	Cooling Package for Shakers. <i>Provides forced air to safely drive 2060E, 2075E, 2100E11, 2050E01 and 2110E to full capacity. Included with shaker kits.</i>	300
2000X04-50	Cooling Package for Shakers - regenerative vacuum, single phase, 230V, 50Hz. <i>Provides forced air to safely drive 2060E, 2075E, 2100E11, 2050E01 and 2110E to full capacity. Included with shaker kits.</i>	600
2000X04-60	Cooling Package for Shakers - regenerative vacuum, single phase, 115-230V, 60Hz.	600
2000X12	Cooling Package for 2500E 115V AC, 60 Hz	600
2000X03	Shaker Accessory Kit for models 2025E, 2060E, 2075E, 2110E. Includes case, 2155G12 3/32" and 2150G12 1/16" stinger kits, adaptors, wrenches, fuses, and other accessories. <i>Included with any 2060E, 2075E shaker or related kit</i>	220
2050A	Lateral Excitation Shaker Stand kit, provides a versatile means of adapting a modal shaker for horizontal input. The stand facilitates excitation with a tensioned "piano" wire stinger (not included). <i>This item requires special shipping, ship weight 182 lb, crate 6 ft x 2 ft x 1 ft.</i>	1 600
Cables	Shaker extension cable for use between amplifier and shaker. 20 ft (6 m) long <a href="#">2000X10-20</a> \$80, 30 ft (9 m) long <a href="#">2000X10-33</a> \$110	160



2000X01



2000X14



2000X15

**Shaker Head Expanders**

2000X01	Lightweight 1.043 kg (2.3 lb) magnesium head expander with 32 stainless steel inserts (10-32 UNF) on a 175 mm (7") diameter table. <i>Fits both 2075E and 2110E shakers.</i>	400
2000X14	Large 9.5 kg (21 lb) magnesium head expander with 25 stainless steel inserts (10-32 UNF) on a 304 mm (12") square table. <i>Fits 2500E shaker.</i>	1 400
2000X15	Modal-Pod™ test fixture for CubeSat vibration testing. Supports mounting different size satellites up to 3U in various orientations. Includes lightweight magnesium head expander, dead mass loads, mounting accessories, tools, and a heavy duty transportation case. <i>Fits 2500E shaker.</i>	3 000

**288 Series ICP® Impedance Head Sensors**

Prices in US\$ per 30-day rental



Colinear force and acceleration sensor used with structural shakers for driving-point measurements. All units feature 10-32 stinger mounting, have two 10-32 coaxial jacks and therefore require two channels of DAQ be used. Place on structure under test, connect the stinger last.

288D01	Impedance Head, ± 50 lbf force range, ± 50 g amplitude range. With TEDS TLD288D01	\$328
TLD288M25	Impedance Head, ± 100 lbf force range, ± 50 g amplitude range, with TEDS. <i>Used for shakers &gt;50 lbf. Larger capacity shakers generally use 208C03 force sensor.</i>	380
288M34	Impedance Head, ± 500 lbf force range, ± 50 g amplitude range. With TEDS TLD288D01	380

**Vibration Controller / Digital Shaker Control Systems**

Prices in US\$ per 30-day rental

Closed loop vibration control systems for Dual Purpose shakers on the Page 32, or to be used with an existing shaker setup. Systems support test modes for vibration testing according to ISO, DIN, MIL-STD 810, IEC, and many other standards. *Sensors and shakers rented separately; contact us for specific control requests.*

Various options include modes for random with notching/force limiting, random data reduction, sine with notching/force limiting, sine resonance search and dwell, sine data.

Common vibration controllers are offered for rent from Crystal Instruments, m+p international, and DataPhysics SignalStar. The Crystal Instruments S81B (up to 4 input/1 output channels) and the S81 premium controller for 8 or more input channels and multiple outputs. The m+p VibPilot supports 4 channels minimum with 2 outputs and the VibRunner supports 8 or more channels and additional output channels.

See Pages 49–53 in the data acquisition and analysis section for more information.

For basic single point sinusoidal test The Modal Shop 9000A SmartSine Calibration Driver is an additional option. With the use of a separate control sensor on the shaker it provides control of frequency and amplitude of a shaker.

Sensors and shakers rented separately. Please see Pages 6–23 for sensors, Page 32 for shakers, or contact us for specific control requests.

## Streamlined Industrial Hygiene Rentals for Your Convenience

The Modal Shop offers special rental options for our industrial hygiene products that are perfect for short-term or one-time applications.

### Flexible Rentals

Rent your way with variable periods including Daily (24 hours), weekly (7 days), and monthly (30 days).

### Rental Period

- Starts the first full day equipment is in your possession for typical rentals, on delivery day if early morning arrival is requested.
- Ends on drop-off or pickup date by the carrier.

### Shipping

- Ground shipping scheduled to arrive the business day before needed.
- Quoted price is what you pay, making it easier to budget for projects
- No Additional Shipping charges, unless expedited shipping is needed.

## Larson Davis Spartan™ Wireless Noise Dosimeters

Wireless and wearable, Models 730 and 730IS offer fast, easy measurements.

### Highlights

- Four independent and configurable virtual dosimeters (choose from OSHA/ACGIH/NIOSH/ISO presets or create your own)
- Completely wireless operation, charging, and data download powered by Bluetooth. No-Bluetooth versions available (730-NBT)
- Accurate data collection with built-in bump and motion detection
- Rentals include both 730-ESR Sound Recording firmware for noise source identification and 730-OB1 1/1 Octave Band Filters for frequency analysis (Note that some firmware included with rental kits are optional when purchased)



Spartan Dosimeter Ordering Information	1 day	2 day	7 day	15 day	30 day
<b>K730</b> 730 dosimeter kit with one dosimeter, one windscreen, two clips. Includes the Event Sound Recording and Octave band filters.	\$64	\$75	\$120	\$190	\$300
<b>K730IS</b> Spartan 730IS intrinsically safe noise dosimeter kit with one dosimeter, one windscreen, two clips.	\$70	\$82	\$140	\$221	\$330

Standards met ANSI S1.25-1991 (R2017), IEC 61252 Ed. 1.2, ANSI/ASA S1.11-2014; IEC 61260-1:2014 Class 1. Compliance to OSHA, MSHA, ACGIH, and ISO 9612, EU Directive 2003/10/EC

## Larson Davis Spartan™ Sound Level Meter

Model 821IH is offered in a Class 1 kit ideal for walkaround industrial measurements, job-based measurements, site surveys, plant sound maps, and noise dose measurements.

### Highlights

- Class 1 Rental Kit includes Workplace Noise Dose and Exposure metrics, Time History, Measurement History, and Selectable 1/1 or 1/3 Octave Measurements (Note that some firmware included with rental kits are optional when purchased)
- Site Assessment reporting through LD Atlas™ App or LD G4 Utility Software



Spartan Sound Level Meter Ordering Information	1 day	2 day	7 day	15 day	30 day
<b>K821IH-D</b> Spartan 821IH Class 1 kit for Occupational Health and Safety testing, with logging up to 1 s, and selectable 1/1 or 1/3 octave.	\$138	\$163	\$279	\$434	\$620

Standards met ANSI S1.4-2014 Class 1, IEC 61672-1:2013 Class 1, ANSI S1.25-1991, IEC 61252:2017, ANSI S1.11-2014 Class 1, IEC 61260:2014 Class 1

## Complimentary Accessory Bundle

All necessary accessories—including electronic manuals and training video links—are included at no additional cost. Noise Dosimeter and Sound Level Meter kits include an acoustic calibrator, and Human Vibration Meter kits include power supply and cabling.

### Notes for Spartan Series rentals

	730 and 730IS dosimeters	821IH sound level meter
Long Term Rates	Weekly rates are shown. Longer term rentals offered at a lower daily rate than 7-day rates shown.	
Accessory Bundle	Order KSPARTAN-ACC to include a manual set, calibrator and necessary adaptor(s)	
Software	LD G4 Utility software included for unit setup / download and reporting at no charge with Accessory bundles above. Requires Windows computer with Admin rights access to install.	
Cases	Dosimeter cases are included with wireless charging pads and North American wall plugs by default	Carrying case included
Compliance	OSHA, MSHA, ACGIH, and ISO 9612, EU Directive 2003/10/EC	

## Streamlined Industrial Hygiene Rentals for Your Convenience

The Modal Shop offers special rental options for our industrial hygiene products that are perfect for short-term or one-time applications.

### Flexible Rentals

Rent your way with variable periods including Daily (24 hours), weekly (7 days), and monthly (30 days).

### Rental Period

- Starts the first full day equipment is in your possession for typical rentals, on delivery day if early morning arrival is requested.
- Ends on drop-off or pickup date by the carrier.

### Shipping

- Ground shipping scheduled to arrive the business day before needed.
- Quoted price is what you pay, making it easier to budget for projects
- No Additional Shipping charges, unless expedited shipping is needed.

## Larson Davis Human Vibration Meter

Model HVM200 is a small rugged vibration meter to measure hand-arm, whole body, and general vibration.

### Highlights

- 3-channel meter includes measurement filters compliant to ISO 8041:2021 and measures per ISO 2631-1, 2, and 5 and ISO 5349 in support of ACGIH Threshold Limit Values (TLVs) and Directive 2002/44/EC.
- Various accelerometers are available per specific test; appropriate human interface adaptors included at no additional charge.



Human Vibration Meter Ordering Information	1 day	2 day	7 day	15 day	30 day
<b>KHVM200</b> Larson Davis HVM200 three channel vibration meter for general and human vibration. Kit includes PSA035 power supply, CBL218 interface cable, battery, 8 GB removable Micro SD memory.	\$151	\$179	\$306	\$476	\$720
<b>SEN040F</b> Triaxial accelerometer used with impulsive testing, including chipping/grinding machines. 1 mV/g with integral filter, use with hand and handle adaptors or in direct mount applications.	\$49	\$58	\$99	\$154	\$280
<b>SEN041F</b> Triaxial accelerometer used with standard hand/arm testing, including rotating machines. 10 mV/g with integral filter, use with hand and handle adaptors or in direct mount applications.	\$49	\$58	\$99	\$154	\$280
<b>SEN026</b> Triaxial low profile accelerometer used with ADP063 palm adaptor and for glove transmissibility testing	\$62	\$74	\$126	\$196	\$300
<b>356B41/NC</b> or <b>SEN027</b> Triaxial seat pad accelerometer for Whole Body testing. Conforms to ISO 10326-1. 5 ft integral cable to 4-pin connector.	\$80	\$95	\$162	\$252	\$360

Additional rental accelerometers can be used with Human Vibration Meters. Check Pages 6–15 for additional options.

**Compliance:** ISO 18041:2021 Human response to vibration – Measuring Instrumentation (See manual for scope of compliance), IEC 61010-1 (2001) Safety, ISO 2631-1:1997 Whole-body vibration – General requirements, ISO 2631-2:2003 Whole-body vibration – Vibration in buildings, ISO 2631-4:2001 Whole-body vibration – Rotational motion, ISO 2631-5:2004 Whole-body vibration –Vibration containing shocks, ISO 5349-1:2001 Hand-transmitted vibration – General requirements, ISO 5349-2:2001 Hand-transmitted vibration – Practical guidance, EN 1032:2003 Mechanical vibration - Testing of mobile machinery, ANSI S2.70

Human interface adaptors included at no charge with rented sensor(s).

- ADP080A** "T" Adaptor: Accelerometer held between fingers.
- ADP081A** Handle Adaptor: Accelerometer held to the side of the hand.
- ADP082A** Clamp Adaptor: Clamp to handle of machine.
- ADP063** Palm Adaptor: Measure at the palm / under a glove.



ADP080A



ADP081A



ADP082A




ADP063

### Notes for Human Vibration rentals:

- Sensor(s) are rented separately. Popular sensors for the HVM are listed above, but any ICP sensor can be selected from Pages 6–16. If using existing sensors, please contact us to assure that cabling and adaptors interface properly.
- HVM Accessory Bundle: Include model **KHVM2-ACC** to provide at no additional charge: manual on CD, G4 software as described above, sensor cables and physical adaptors as required.

## Larson Davis Software Options

**LD Atlas™** app for mobile devices and **G4 LD Utility** for Windows-based PCs are included at no additional charge and offer test setup, control, monitoring, data review, and reporting capability for HVM200, 730 Series and 821 Series LD instruments.



Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Microphones are tuned for three basic acoustic field types; free-field, random incidence, and pressure. The acoustic field response that is optimal for a microphone dictates the microphone designation. Details on each type are as follows:




**Free-field**

Designed for use in an environment without reflections. Anechoic rooms and outdoor spaces without structures are good examples of a free-field. A free-field microphone has a flat frequency response with respect to any source whose primary direction is collinear (0° angle of incidence) with the acoustic axis of the microphone.



**Random**

Designed for use in areas where the sound field comes from any direction and have very uniform directivity characteristics. Random incidence microphones are best for use in reverberant rooms and manufacturing floors where many sound sources are present.



**Pressure response**

These are used in a similar manner as a pressure transducer, flush mounted in a wall or coupler. It is unique in that the microphone is not designed to be in the sound field. Pressure microphones are not tuned to compensate for the microphone being part of the field and are commonly used as calibration transfer standards

**Precision Condenser Microphone/Preamplifier Pairs from PCB**

■ - Highlighted product or spec    ○ Note: These units operate via standard ICP Power. Microphone and preamplifier are required.  
 ■ - ICP® microphones

	Mic	Preamp	Type	Diameter (in)	Sensitivity (mV/Pa)	Freq Response (± 2 dB)	Dynamic Range (dB re: 20 µPa)	Connector Type	\$/30 day
○ 378C01	377C01	426B03	Freefield	1/4	2	5 Hz – 80 kHz	53 – 162	10-32	320
○ 378A06	377A06	426E01	Freefield	1/2	12.6	3.15 Hz – 40 kHz	22 – 150	BNC	280
○ 376B02	377B02	426A13 (short)	Freefield	1/2	50	3.75 Hz – 20 kHz	18.5 – 135	10-32	280
○ 378B02	377B02	426E01	Freefield	1/2	50	3.15 Hz – 20 kHz	18.5 – 135	BNC	230
○ HT378B02	377B02	HT426E01 (high temp)	Freefield	1/2	50	3.15 Hz – 20 kHz	18.5 – 135	BNC	280
○ 378A07	377A07	426E01	Freefield	1/2	50	0.13 Hz – 20 kHz	23 – 134	BNC	360
○ 378A08	378A08		Multiple Field Use	1/4	50	12 Hz – 20 kHz	25 – 123	10-32	500
○ 379A12		ruggedized pair	Freefield	1/2	50	3.75 Hz – 20 kHz	15.5 – 137	BNC	276
○ 378A04		matched system	Freefield	1/2	450	10 Hz – 16 kHz	6.5 – 80	BNC	580
○ 378A12	377A12	426B03	Pressure	1/4	0.25	5 Hz – 20 kHz	60 – 182	10-32	330
○ 378C10	377C10	426B03	Pressure	1/4	1	5 Hz – 70 kHz	53 – 174	10-32	320
○ 378A14	377A14	426A05	Pressure	1/4	1	4 Hz – 70 kHz	50 – 173	10-32	320
○ 378C13	377C13	426E01	Pressure	1/2	12.6	3.15 Hz – 20 kHz	22 – 150	BNC	286
○ 378A21	377A21	426E01	Random Inc.	1/2	12.6	4 Hz – 25 kHz	22 – 150	BNC	286
○ 378C20	377C20	426E01	Random Inc.	1/2	50	3.15 Hz – 12.5 kHz	20 – 135	BNC	286
HT378C20	377C20	HT426E01 (high temp)	Random Inc.	1/2	50	3.15 Hz – 12.5 kHz	20 – 135	BNC	300

**Precision Condenser Microphone Cartridges**

0 V microphone shown including the popular 1/2" 377B02 and 1/4" 377C01 mate with 426 Series Preamplifiers in section below, and are powered with ICP®

	Manufacturer	Diameter (in)	Type	Sensitivity (mV/Pa)	Freq Response (±2dB)	Dynamic Range (dB re: 20 µPa)	Polarization Voltage (V DC)	\$/30 day
377C01	PCB	1/4	Freefield	2	4 Hz – 80 kHz	35 – 170*	0	200
377B02	PCB	1/2	Freefield	50	3.15 Hz – 20 kHz	15 – 146*	0	170
377A06	PCB	1/2	Freefield	12.6	3.15 Hz – 31.5 kHz	20 – 160*	0	190
377A07	PCB	1/2	Freefield	50	0.07 Hz – 20 kHz	15 – 147*	0	240
377A12	PCB	1/4	Pressure	0.25	4 Hz – 20 kHz	65 – 178*	0	200
377C10	PCB	1/4	Pressure	1.0	4 Hz – 70 kHz	35 – 174*	0	190
377A14	PCB	1/4	Pressure	1.0	4 Hz – 70 kHz	35 – 178*	0	200
377C13	PCB	1/2	Pressure	12.6	3.15 Hz – 20 kHz	18 – 162*	0	190
377B11	PCB	1/2	Pressure	50	3.15 Hz – 10 kHz	15 – 146*	0	190
377A15	PCB	1	Pressure	50	5 Hz – 8 kHz	11.5 – 150	0	300
377C20	PCB	1/2	Random Inc.	50	3.15 Hz – 16 kHz	15 – 144*	0	190
377A21	PCB	1/2	Random Inc.	12.6	4 Hz – 25 kHz	20 – 162*	0	190

\* - When used with ICP® power, reduce upper dynamic range level by about 8 dB

**200 V Precision Condenser Microphone Cartridges**

200 V microphones shown require the use of a separate power supply as shown in the Traditional Microphone Power Supply table on the following page.

	Manufacturer	Diameter (in)	Type	Sensitivity (mV/Pa)	Freq Response (±2dB)	Dynamic Range (dB re: 20 µPa)	Polarization Voltage (V DC)	\$/30 day
377C41	PCB	1/2	Freefield	44.5	4 Hz – 20 kHz	15 – 146	200	200
2570	Larson Davis	1	Freefield	50.7	2.6 Hz – 18 kHz	10 – 146	200	240
2575	Larson Davis	1	Pressure	45.5	4 Hz – 8 kHz	10 – 146	200	240
377A60	PCB	1/2	Random Inc.	50	3.15 Hz – 10 kHz	15 – 146	200	200
40BI**	GRAS	1/4	Intensity Pair	3	IEC 651 Type 1	40 – 168	200	540
40AI**	GRAS	1/2	Intensity Pair	25	IEC 651 Type 1	21 – 152	200	540
40AK**	GRAS	1/2	Intensity Set	25	IEC 651 Type 1	21 – 152	200	600

\*\* - Intensity microphone pair rentals include a pair of microphones and preamplifiers, Intensity set rentals, add spacers and adaptors

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

**Preamplifiers**

	Manufacturer	Diameter (in)	Connector	Use With	Additional Notes	\$/30 day
○ 426E01	PCB	0.5	BNC	1/2" 0 V (Prepolarized) Mics / ICP power		116
○ HT426E01	PCB	0.5	BNC	1/2" 0 V (Prepolarized) Mics / ICP power	For high temp to 120 °C (248 °F)	130
○ 426B03	PCB	0.25	10-32	1/4" 0 V (Prepolarized) Mics / ICP® power		136
○ 426A14	PCB	0.25 & 0.5	3-Pin XLR	Phantom Powered Systems		166
PRM902	Larson Davis	0.5	LEMO 1B 7 pin	LD 824 and traditional microphone power		100

**Traditional Microphone Power Supplies** (To condition 130 series array and precision 0 V polarized mics, use ICP power shown on Page 18 and 19)

	Manuf.	Channels	Gain (dB)	Weighting	Inputs/Outputs	Power	Notes	\$/30 day
2200C	Larson Davis	2	-30 to +40 in 10 dB steps	A, C or flat	Switchcraft 5 pin male / BNC	Battery/Line	Dual output allows simultaneous flat and weighted measurements	\$380
2210	Larson Davis	10	0 to +42 in 2 dB steps	A, B, C, flat	LEMO 7 pin/ 25pin D to BNC	Battery/Line	Selectable highpass and lowpass filtering	1 600

**Microphone Cabling**

- EXA Series** 7 pin LEMO extension cable. **EXA010** 10 ft (3 m): \$56, **EXA020** 20 ft (6 m): \$66, **EXA100** 100 ft (30 m): \$120
- EXC Series** 5 pin Switchcraft used with 831 and LxT. **EXC010** 10 ft (3 m): \$36, **EXC020** 20 ft (6 m): \$46, **EXC050** 50 ft (15 m): \$90, **EXC100** 100 ft (30 m): \$140
- Coaxial Cables** BNC and 10-32 cabling for ICP compatible microphones – refer to Page 10 for details/pricing

**Underwater Acoustics and Marine Mammal Noise Measurements**

Pictures not shown to scale



<b>K831C-MM</b>	Larson Davis Marine Mammal Noise Monitoring System, tests for compliance to Marine Mammals Protection Act to thresholds specified by NMFS. Includes SoundAdvisor™ 831C with ELA and SR options, ADP005 adaptor to connect to PRM831, G4 software with Marine Mammals Protection enabled. <i>Add hydrophone, cage, pistonphone and cal adaptor separately.</i>	\$1 040																								
<b>TC4013</b>	High sensitivity low frequency miniature hydrophone. 1 Hz–170 kHz, -211 dB ±3 dB re 1 V/uPa, 700 meter operating depth, various cable lengths available, cable terminating in LEMO. BNC adaptor included.	<table border="0"> <tr><td><b>TC4013-1</b></td><td>10 ft (6 m)</td><td>\$440</td></tr> <tr><td><b>TC4013-4</b></td><td>30 ft (10 m)</td><td>460</td></tr> <tr><td><b>TC4013-5</b></td><td>65 ft (20 m)</td><td>520</td></tr> <tr><td><b>TC4013-11</b></td><td>82 ft (25 m)</td><td>570</td></tr> <tr><td><b>TC4013-13</b></td><td>98 ft (30 m)</td><td>600</td></tr> <tr><td><b>TC4013-8</b></td><td>164 ft (50 m)</td><td>740</td></tr> <tr><td><b>TC4013-9</b></td><td>196 ft (60 m)</td><td>800</td></tr> <tr><td><b>TC4013-12</b></td><td>328 ft (100 m)</td><td>1 100</td></tr> </table>	<b>TC4013-1</b>	10 ft (6 m)	\$440	<b>TC4013-4</b>	30 ft (10 m)	460	<b>TC4013-5</b>	65 ft (20 m)	520	<b>TC4013-11</b>	82 ft (25 m)	570	<b>TC4013-13</b>	98 ft (30 m)	600	<b>TC4013-8</b>	164 ft (50 m)	740	<b>TC4013-9</b>	196 ft (60 m)	800	<b>TC4013-12</b>	328 ft (100 m)	1 100
<b>TC4013-1</b>	10 ft (6 m)	\$440																								
<b>TC4013-4</b>	30 ft (10 m)	460																								
<b>TC4013-5</b>	65 ft (20 m)	520																								
<b>TC4013-11</b>	82 ft (25 m)	570																								
<b>TC4013-13</b>	98 ft (30 m)	600																								
<b>TC4013-8</b>	164 ft (50 m)	740																								
<b>TC4013-9</b>	196 ft (60 m)	800																								
<b>TC4013-12</b>	328 ft (100 m)	1 100																								
<b>TC4013</b>	Never touch or bend the sensing point (nitrile rubber end) of the hydrophone. The small sensing area is easily damaged, leading to degradation or loss in performance. Shocks (including drops) on hard surfaces may result in damage to the transducer.																									
	Use extreme caution when handling and using hydrophone to allow no damage to the cable. Once the integrity of the cable is compromised, the sensor assembly is likely unreparable.																									
<b>TL8013</b>	Protective cage for TC4013 hydrophone	70																								
<b>EC6081</b>	VP2000 single ended Voltage Preamplifier for hydrophones, with 6-level gain and 12 high- and 12 low-pass filters. High input impedance allows for low frequency measurements. Includes 1 meter TL8088 DC supply cable, 3-pin female to universal plugs for DC power.	500																								
<b>394A40</b>	Pistonphone, 114.0 (± 0.08) dB output at 250 Hz, 1/2" opening.	600																								
<b>42AC</b>	Pistonphone, 134 dB (±0.1) dB output at 250 Hz, 1/2" opening.	700																								
<b>RA0043</b>	Pistonphone coupler for TC4013 hydrophone.	120																								
<b>CAL1250</b>	Larson Davis Class 1 acoustic calibrator with user selectable output of 94 or 114 dB at 251.2 Hz or 1kHz. 1/2" opening.	180																								
<b>HADPTC4013</b>	Adaptor for RESON TC4013 Hydrophone Calibration, Multi-Function Calibrator, salt water corrosion-resistant stainless steel construction. Checks 120 dB and 140 dB re 1 micro-Pa at 250 Hz when used with CAL1250 (not included)	80																								

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Ultra Low Noise ICP® Microphone

Prices in US\$ per 30-day rental



**378A04** \$580  
 1/2" Prepolarized Ultra Low Noise Microphone/Preamplifier System for free-field applications, 5.5 dBA typical noise floor. Requires 4 mA ICP power, 5 Hz – 20000 Hz ±4 dB , BNC connector, includes TEDS.

Array Microphones

Prices in US\$ per 30-day rental



**130A24** \$126  
 ICP® Water Resistant Array Microphone and preamplifier, 10 mV/Pa, 20 Hz – 16000 Hz ±2 dB range, BNC jack connector, IP55 rated, Includes TEDS.

**130F22** \$80  
 ICP® Array Microphone with integral preamplifier, 1/4" diameter, 10 Hz – 20 000 Hz ±4 dB, SMB jack connector, includes TEDS. Inherent Noise: 29 dB re 20 µPa. 3% Distortion Limit: 122 dB.  
 Use with 079B10 mic clip, 079A07 windscreen, ADP109 cal adaptor, rented separately



**130F20** \$80  
 ICP® Array Microphone with integral preamplifier, 1/2" diameter, 10 Hz – 20 000 Hz ±4 dB, BNC jack connector, includes TEDS. Inherent Noise: 29 dB re 20 µPa. 3% Distortion Limit: 122 dB.  
 Use with 079A11 mic clip, 079A06 windscreen, ADP109 cal adaptor, rented separately.

**130F21** \$80  
 ICP® Array Microphone with integral preamplifier, 1/4" diameter, 10 Hz – 20 000 Hz ±4 dB, 10-32 jack connector, includes TEDS. Inherent Noise: 29 dB re 20 µPa. 3% Distortion Limit: 122 dB.  
 Use with 079B10 mic clip, 079A07 windscreen, ADP109 cal adaptor, rented separately.



Surface Microphone

Prices in US\$ per 30-day rental



**130B40** \$220  
 Low-profile surface pressure microphone and preamplifier, prepolarized, 20 Hz – 20 000 Hz ±6 dB. Used to measure surface noise measurements where wind is prevalent including automotive and aerospace wind tunnel testing.

Sound Intensity

Prices in US\$ per 30-day rental



**MEZZO 1** \$3 200  
 SoftdB MEZZO Intensity Probe per IEC 61043 (1993) standard with real time signal processing, standard 1/1, 1/3, 1/24 octave real-time digital filters and FFT analysis. Signal processing is built in to the probe. Intensity Analyzer Software included on a system controller with rentals.

**I-Track** \$3 200  
 MEZZO I-Track System combines acoustic data provided by a MEZZO Probe with a calibrated Wide-Angle Digital Camera to provide a fast and easy high-definition sound image performed in a few minutes. The optical tracking system precisely locates the sound intensity probe. Sound intensity, pressure and PI index levels can be plotted for every frequency band as well as for global level. Correspondingly, the associated spectrum shows the spatial average of pressure, intensity, PI index (F3), P|| index (F2), Extraneous sources index (F3-F2) and sound power. Includes camera, tracking pad with holder, cabling, case, and I-Track Module license.

**GRAS Intensity Probe** CALL  
 GRAS Intensity Probe with probe handle, microphones, spacers.

High Temp Acoustics

Prices in US\$ per 30-day rental



**HT426E01** \$126  
 High temperature 1/2-inch preamplifier for prepolarized microphones. Mates with any 377 Series 0 V microphones to allow use in temperatures to 125 °C/257 °F, powers with ICP.

**377B26** \$1 100  
 ICP® Probe Microphone for tight spaces or high temp, near-field, exhaust testing, acoustic impedance measurements and more. Wide frequency range with calibration provided compared to 20 kHz compared with competitive units spec'd to 8 kHz.



Sound Camera

Prices in US\$ per 30-day rental



**CAE SoundCam** \$4 100  
 64-channel acoustic camera system with Carry Case, Tripod and Headphones. Beamforming from 800 Hz to 24 kHz combined with optical camera, ideal for room and building acoustics, NVH and Buzz/Squeak/Rattle, Soundproofing verification and noise localization.

**CAE SoundCam 3** \$4 800  
 176-channel acoustic camera system with Carry Case, Tripod and Headphones. Beamforming to 90 kHz combined with optical and thermal imaging cameras, ideal for a broad range of testing including ultrasonic leak testing.

**CAE SoundCam Go** \$700  
 72-channel acoustic camera system for iPhone (not included). Beamforming to 100 kHz. Magnetic snap on hardware to iPhone 17 Pro.

### • **What Standards are to be met? What Class of Meter should be used?**

All 821 and 831 units offered comply with current IEC, ANSI and DIN standards\* for Sound Level Meters. A Class 1 higher accuracy, performance and calibration requirements. A Class 1 meter offers many benefits including the best accuracy over a wide frequency range and is generally recommended for a wide range of testing including Environmental Noise Monitoring, Building Acoustics, for Consulting Projects, and even Workplace Noise testing. Class 1 is also a requirement for any case that may involve litigation. [\*Specifically IEC 60651:2001, IEC60804:2000, IEC61260:2014, IEC61672-1:2013, ANSI S1.11-2014, ANSI S1.4-2014, ANSI S1.43-1997 and DIN 45657. Dosimetry per IEC 61252:2017 and ANSI S1.25-1991 where applicable. Meters also meet additional safety standards, with additional details available.]

### • **What is measured?**

Rental 721, 821, and 831C meters can measure:

- Acoustic levels including Lmax, Lmin, Lpeak with occurrence date and time
  - Acoustic Averages (Equivalent Level Leq, Sound Exposure LE)
  - 721 and 821: 1/1 or 1/3 Octave Band (Leq, Lmax, Lmin), 831C: 1/1 and/or 1/3 with installed OB3 option
  - Simultaneous RMS and Peak Frequency Weighting: A, C and Z (unweighted)
  - Simultaneous RMS and Peak Frequency Weighting: A, C and Z (unweighted) and Detectors (Slow, Fast and Impulse)
  - Statistical Ln (6 user-selectable Ln s), including spectral Ln
  - Community Noise (LDN, LDEN, LDay, LEve, LNight)
  - Sound Exposure including LXVE, Lxavg, TWA(8), Dose, Projected Dose, SEA, and more
  - Record audio files for post processing and to determine noise sources/events (optional, only 831C can record continuously)
  - **821 only:** Option to compute, display and report NC and RC curves
  - **831C only:** Record audio files to determine noise source (optional)
  - **831C only:** Option to remotely connect and access data and make changes to the meter settings
  - **831C only:** Optional weather sensor for wind speed, gust speed, direction, temperature, humidity, barometric pressure
  - **831C only:** Option for location latitude, longitude, elevation with GPS
- Additional parameters are described in each meter's Selection Guide, available online.

### • **How often can each measurement be stored?** Internally or on attached USB.

Rental meters store three main bins of data, even simultaneously if needed:

- Time History: stores fast measurements, available in a time range from 100 ms to 24 h time on 831C, 100 ms to 1 h on 721/821. Many parameters also available in 2.5 ms to 50 ms blocks on 831C.
- Measurement History: long-term trends over time, selectable 1 m to 24 h on 831C, 1 m to 6 h on 721/821.
- Events / Exceedances: additional storage when levels exceeded for minimum duration, based on fixed or dynamic threshold levels

### • **What are power options?**

Rental meters can power via internal batteries, AC wall power or USB port of a computer with included adaptors. Outdoor systems have options to power via external DC, D-cell packs, or sealed lead acid rechargeable with or without a solar panel.

### • **How is data accessed?**

With adequate power, units can be left out for weeks or longer and continue to take data.

- All meters offer download via USB cable or USB memory stick
- 721 and 821 units can also connect and download data via Bluetooth
- 831C-based systems also can connect via cellular, WiFi and wired networking options are available to provide real time email or text alerts when levels are exceeded, and to download data remotely or to automatically push data files to SFTP or Dropbox

### • **Can I rent a calibrator? An extra long microphone extension cable?**

With any sound meter rental, an accessory kit is provided at no additional charge. This includes a link to electronic manual sets, utility software to set up meters, calibration certificates, and a single calibrator is included as well. A 10 ft (3 m) cable is typically included for handheld rental meters, 20 ft for outdoor kits, but specify if a particular length is required. Additional items are available for rent.

### • **Is meter setup and/or download service available?**

Yes! Use SLM-DL code to add this, hourly rate for service.

### • **Is any particular equipment suggested for particular applications?** Some Suggestions:

Handheld Walkaround Analysis, Quick Testing

- \$ • **K821ENV-D** for most standard measurements, options to add Event Sound Recording and Industrial hygiene metrics
- Environmental Noise Monitoring (Community, Traffic, Airport, Rail, Construction, Mining, Industrial, Stadium, Wind Farm, Quiet Space):
- For most testing (20 to 140 dB measurement range):
- **KNMS048** 821-based kit. Includes 1/1, 1/3 octave capability, monopole or tripod, options for event sound recording and power
- Same as above but with more options including Weather data, GPS data, more flexible Sound Recordings for events and more
- **831C**-based kits offer flexibility to add many advanced options
- Fully featured outdoor system plus remote monitoring and/or email and/or text alerts:
- **NMS044-SLA100\*** 831C-based kit with solar panel for remote connectivity via Wi-Fi, Ethernet, or Cellular (add on 831C-SIM to include cellular data)
- Extremely quiet measurements (down to 6.5 dBA!) for Product Testing, Environmental Anechoic Chambers, Quiet Spaces, etc..
- **831C-LOWN-UPG** to add low noise **378A04** microphone/preamplifier to any 831C kit
- Building Acoustics / Room Acoustics (Architectural, Reverb Time, Sound Insulation, Classroom, etc.):
- **K821ENV** 821-based kit, add X21-RCRC option for NC and RC measurement and reporting
- **K831C** 831C-based kit with 831C-RA advanced Room Acoustics option. Additional options include hardware including Tapping Machines and Sources are shown on Page 46, and DNA Software for reporting and additional analysis.
- Occupational Noise Evaluation / Safety & Health:
- Wearable **Spartan Wireless** noise dosimeters are on Page 35 for personal noise dose surveys.
- **K821IH-D** 821IH-based kits for workplace noise exposure assessments and plant noise surveys.
- Firearm and Suppressor Acoustic Analysis:
- **K821-QPR** 821-based kit with microphone designed to measure very high levels associated with ballistics and gunfire testing.

The Modal Shop offers a complete range of Larson Davis Sound Level Meters. Selecting the proper sound level meter testing system is one of the most important aspects of any sound test. The Modal Shop's Rental Program offers proven solutions with a variety of capabilities and kit configurations. Meters are available for both short- and long-term rentals. Every meter offered is an integrating unit that logs data (including Leq, Lmax, Ln s), meets Class 1 standards, and connects to a PC to setup and download data. First, a few points for each meter that answer some common questions:



● **SoundExpert® Sound Level Meter | Model 821ENV**

Model 821ENV offers a basic meter with a simple user interface ideal for handheld or unattended environmental testing. Rental units include the ability to capture 1/1 or 1/3 octave data. Outdoor kit configurations are available. Options for Event Sound Recording and NC/RC Curves are available.

**Highlights**

- Large, responsive touch display
- Long battery life – up to 40 hours
- Automatic data download via Bluetooth or USB options
- Also used in EMS011 outdoor system with remote accessible data, reports and alerts/alarms, see Page 28

**821 specification in detail**

System measurement range: A: 17–140 dB typical, Z: 25–140 dB ; System noise floor: A: 17 dB, Z: 25 dB with 377B02 microphone; Linearity range: A: ≥ 116 dB (24-140 dB), C: >113 (27-140), Z: >103 (37-140) Time weightings: Slow, Fast, Impulse, Integration and Peak; Frequency weightings: A, C, and Z simultaneous; Ln Statistics (L0.01 through L99.9 available); USB connectivity plus AC/DC outputs to recorder, >40 hours continuous measurement with internal battery (screen off, 1s or slower time history), 12 hours with screen on and fast 0.1s time history), 8 GB removable MicroSD card memory allows for months of measurements.

**Standards met:** **Acoustic:** IEC61672-1:2013-05 Class 1, ANSI S1.4-2014 Class 1, ANSI S1.43-1777 Type 1, IEC 60651:2001 Type 1, IEC 60684:2000 Type 1. Filters per ANSI S1.11-2014 Class 1, IEC 61260-1:2014 Class 1 **Noise Dosimetry** (when used): ANSI S1.25-1991, IEC 61252:2017, Approvals: CCE, RoHS, WEEE



● **SoundAdvisor™ Sound Level Meter | Model 831C**

The Model 831C provides the most versatility with internet connectivity options and extensive software features making it an ideal choice for handheld operation and long-term environmental monitoring. Unattended monitoring projects are simplified with the ability to connect to the internet via Wi- Fi, Ethernet, or Cellular to change measurement parameters, download data remotely, and receive real-time alerts.

**Highlights**

- Cellular, WiFi, and wired networking are all available to you when using the SoundAdvisor™.
- A full color user interface allows you to interpret data more easily, right from the meter
- 2 GB internal memory, expandable by USB
- Also used in EMS012 outdoor system with remote accessible data, reports and alerts/alarms, see Page 28

**831C specification in detail**

System measurement range: A: 17–140 dB, Z: 24–140 dB ; System noise floor: A: 16 dB, Z: 23 dB with 377B02 microphone; Linearity range: A: ≥ 117 dB to 140 dB

Time weightings: Slow, Fast, Impulse, Integration and Peak simultaneously, Linear or Exponential Integration (Slow, Fast or Impulse); Frequency weightings: A, C, Z simultaneously; Ln Statistics (L0.01-L99.9), Voice notes and sound recording available, USB connectivity plus AC/DC outputs to recorder, >8 hours with (4) fast recharging AA batteries (included), 2 GB unit holds over 400 M Leq histories or 4 M 1/1- and 1/3-octave measurements

**Standards met:** **Sound Level Meter:** IEC61672-1 Ed. 2.0 (2013) Class 1, Group X; IEC60651 Ed 1.2 (2001) + Am. 1 (1993-02) and Am. 2 (2000-10) Type 1, Group X; IEC60804 (2000-10) Type 1, Group X; ANSI S1.4-2014, Class 1; ANSI S1.43-1997 (R 2007) Type 1; DIN 45657. **Octave Filter:** IEC61260 Ed. 2.0 (2014), Class 1, All filters; ANSI S1.11-2014 Class 1, All filters.



● **Advanced Sound Level Meter | Model 831**

Model 831 is generally used for legacy users expanding capability with existing 831 meters. It provides a good solution for unattended environmental monitoring without remote connectivity.

**Highlights**

- Tried and true platform
- Rapid boot up time

**831 specifications in detail**

System measurement range: A: 28–140 dB, Z: 35–140 dB ; System noise floor: A: 18 dB, Z: 23 dB with 377B02 microphone; Linearity range: A: ≥ 115 dB to 140 dB

Time weightings: Slow, Fast, Impulse, Integration and Peak simultaneously, Linear or Exponential Integration (Slow, Fast or Impulse); Frequency weightings: A, C, Z simultaneously; Ln Statistics (L0.01-L99.9), Voice notes and sound recording available, USB connectivity plus AC/DC outputs to recorder, >8 hours with (4) fast recharging AA batteries (included), 2 GB unit holds over 400 M Leq histories or 4 M 1/1- and 1/3 octave measurements

**Standards met:** **Sound Level Meter:** IEC61672-1 Ed. 1.0 (2002-05) Class 1, Group X; IEC60651 Ed 1.2 (2001) + Am. 1 (1993-02) and Am. 2 (2000-10) Type 1, Group X; IEC60804 (2000-10) Type 1, Group X; ANSI S1.4-1983 (R 2006) + Am.S1.4A-1985 (R 2006) Type 1; ANSI S1.43-1997 (R 2007) Type 1. **Octave Filter:** IEC61260 Ed. 1.0 (1995-08) + Am. 1 (2001-09), 1/1- and 1/3-octave Bands, Class 0, Group X, all filters; ANSI S1.11-2004 Class 1. **Noise Dosimeter:** IEC61252 Ed. 1.1 (2002-03) Type 1; ANSI S1.25-1991 Class 1

Sound Level Meters are rented from TMS as complete kits (indicated by a “K” prefix before the Larson Davis model number) and as complete outdoor NMS (Noise Monitoring Station) systems. Rental kits include a microphone, preamplifier, microphone extension cable, windscreen, internal batteries, and calibration information. 821 and 831C units also include a hard case and AC line power supply. See individual meter pages for more details.

● 821 ● 831C ● 831

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

**Want a complete sound meter solution – no extra parts required?**

Our Sound Level Meter Kits are preconfigured to fit most applications and come with everything you need. Designed for quick setup and dependable results, these kits let your team start taking accurate environmental and occupational noise measurements right away.

**Complimentary Accessory Bundle** *Included at no charge with all sound meter rentals*

<b>KSLM-ACC</b>	Standard accessory kit for SLM rental, includes manual sets, utility software for setup and data download (1 for each family of meter rented) with interface accessories, and a single calibrator. Contact The Modal Shop if additional items required.	\$100 <b>(at 100 % discount)</b>
-----------------	---	-------------------------------------

**Preconfigured 821-Based Kits** *Full details and pictures of items included in kits are shown online*

<b>K821ENV-D</b>	SoundExpert® 821 handheld kit with full-featured logging and selectable 1/1 and 1/3 octave. Includes microphone, preamplifier, extension and connectivity cabling, windscreen, handheld case and more.	\$680
<b>K821-QPR</b>	SoundExpert® 821 handheld kit for impulsive / high level sounds (firearms and more) beyond 180 dB.	640

**821-Based Kits for Unattended Monitoring** *Full details and pictures of items included in kits are shown online*

<b>KNMS048</b>	SoundExpert® 821-based outdoor Noise Monitoring Kit with full-featured logging and selectable 1/1 and 1/3 octave. Includes microphone and preamplifier with environmental protection, and accessories. Select tripod, battery options and/or line power.	\$900
----------------	--	-------

**Power Options for KNMS048**

Select one of the three to the right for above kit

Options	Description	
<b>821-P1</b>	Indoor use AC/DC power option for Larson Davis 821/721. Includes 21Ah battery BAT011, PSA040 charger and cabling.	add \$90
<b>821-P2</b>	Outdoor AC/DC power option for Larson Davis 821/721. Includes 21 Ah battery BAT011, outdoor rated AC power supply PSA039, charge controller and connecting cables.	add \$150
<b>821-P3</b>	D-Cell battery option for Larson Davis 821/721. Includes BAT024 that holds 6 or 12 D-Cell batteries (batteries not included).	add \$60

<b>KNMS048-SLA-S</b>	SoundExpert® 821-based outdoor Noise Monitoring Kit with solar power. Includes full-featured logging and selectable 1/1 and 1/3 octave, microphone and preamplifier with environmental protection, and accessories.	1100
<b>EMS011</b>	821-based outdoor system with remote accessible data, reports, alerts/alarms and more. Can add optional dust and ground vibration to EMS systems. See page 28.	call

**Preconfigured 831C SoundAdvisor™ Kits** *Full details and pictures of items included in kits are shown online*

<b>K831C-L</b>	Larson Davis 831C Logging Analyzer Kit. Includes LOG, and ELA firmware, selectable microphone, preamplifier, windscreen, WiFi Dongle (DVX014), line power supply, case, calibration data, and 4 internal AA batteries.	\$ 930
<b>K831C</b>	Same as K831C-L, but adds OB3 firmware for 1/1 and 1/3 octave capability.	1 100
<b>K831C-H</b>	Same as K831C-L, but adds OB3 and SR firmware for 1/1 and 1/3 octaves and flexible sound recording capability.	1 200

**Low Noise 831C Upgrade** *Full details and pictures of items included in kits are shown online.*

<b>831C-LOWN-UPG</b>	Upgrade 831C kit with 378A04 microphone, ADP074 ICP® adaptor, and user selectable cable length to measure to 6.5 dBA.	\$250
----------------------	---	-------

**831C-based Kits for Unattended Monitoring** *Full details and pictures of items included in kits are shown online.*

<b>NMS044-SLA100</b>	Complete 831C based noise monitoring system capable of remote data access, email and text alerts when connected to internet via Ethernet, Wi-Fi, or Cellular network. Solar panel included to charge battery allowing system to run indefinitely. Includes Model 831C, with LOG and ELA firmware, PRM2103-FF, EPS044-SLA, EPS2116, SLP002 (solar panel) with charge controller & necessary cables. For use when solar insolation > 1 kW•h/m2/day. Cellular SIM card not included. <i>See Standard Outdoor Kit Components on the following pages.</i>	\$ 2 200
<b>831C-SIM</b>	4G Wireless SIM card for 831C based systems. Data plan with public IP address. International, roaming and overage charges may apply.	\$ 220
<b>NMS-831C-L</b>	Outdoor Logging Noise Monitoring System. Includes 831C meter with LOG, ELA, and firmware, microphone, preamplifier, user selectable tripod, EPS2116 environmental protection kit, and battery case. <i>See Standard Outdoor Kit Components on the following pages.</i>	1 300
<b>NMS-831C</b>	Same as NMS831C-L, but adds OB3 firmware	1 480
<b>NMS-831C-H</b>	Same as NMS831C-L, but adds OB3 and SR firmware	1 580
<b>EMS012</b>	821-based outdoor system with remote accessible data, reports, alerts/alarms and more. Can add optional dust and ground vibration to EMS systems. See page 28	call

**Preconfigured 831-based Kits** *Full details and pictures of items included in kits are shown online*

<b>K831L</b>	Larson Davis 831 handheld Logging Analyzer Kit. Includes LOG, ELA, and IH firmware, microphone, preamplifier, windscreen, line power supply, case, calibration data, and 4 internal AA batteries.	\$960
<b>K831</b>	Same as K831L, but adds OB3 firmware.	1 130
<b>K831H</b>	Same as K831L, but adds OB3 and SR firmware.	1 230

**831-based Kits for Unattended Monitoring** *Older systems for existing users.*

<b>NMS-831L</b>	Outdoor Unattended Logging Noise Monitoring System. Includes 831 meter with LOG, ELA, and IH firmware, microphone, preamplifier, user selectable tripod, EPS2116 environmental protection kit, and battery case. <i>See Standard Outdoor Kit Components on the following pages.</i>	\$1 240
<b>NMS-831</b>	Same as NMS-831L, but adds OB3 firmware.	1 500
<b>NMS-831H</b>	Same as NMS-831L, but adds OB3 and SR firmware.Z	1 600

● 821 ● 831C ● 831

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Sound Level Meter Capability/Comparison *(Additional detail and specification shown on following page; even more detail available online)*

			
Features	821	831C	831
Class (IEC61672-1)	Class 1	Class 1	Class 1
Microphone			
Dynamic Range	>120 dB	>120 dB	>120 dB
<b>Standard Firmware</b>			
Time History (Data Logging, including Leq and Lmax)	●	LOG \$200	LOG \$240
Measurement History (Intervals, including Ln data)	●	ELA \$120	ELA \$140
Automatic Event Detection and Exceedances, with alerts	●	ELA \$120	ELA \$140
1/1 and 1/3 Octave (1/1 or 1/3 on 821)	OB3 \$90	OB3 \$120	OB3 \$170
Sound Recording (trigger from events, timed, manual, and more)	SR \$110	SR \$120	SR \$140
Schedule run/stop times, modem usage, real-time alerts via email or SMS	-	SCH \$120	-
<b>Advanced Firmware</b>			
Industrial Hygiene Parameters (Dose)	○	-	●
FFT (narrowband frequency analysis)	-	FFT \$120	○
Voice Annotation	-	●	○
Room Acoustics (RT60 and more)	-	RA \$120	RT \$240
Compute, Display and Report NC and RC curves	NCRC \$70	-	-
Audiometry (hearing level, FM, pulse, THD and more)	○	AUD \$800	-
<b>Software</b>			
Setup and Download Software	●	●	●
<b>Accessories</b>			
Microphone Extension Cable, Computer Connection, Calibrator, etc	●	●	●
<b>Options</b>			
DNA Data Navigation and Analysis software	○	○	○
Outdoor Kits Available	○	○	○
Integration of Weather Monitoring	○	○	○
Integration of Dust and Vibration	○*	○*	-

\* - EMS-based Systems are overviewed on Page 28 and include options for dust and ground vibration

● standard with rental ○ optional - not available

Customize or Build to Order Sound Level Meter Rental Kits

Please note that pre-built kits work best for most customers. If needed, preconfigured kits can be customized by substituting items from the build-to-order offerings found on pages 44-47.

For the few customers whose needs are very specific, the following pages list individual components, which can be combined to offer highly specialized solutions.

In general, users who need help customizing a kit should ask themselves the following questions:

- **What is your application?**
  - A. Unattended monitoring? Start with unattended kits on page 42, and consider adding or swapping accessories for things like weather or special power and environmental protection options
  - B. Handheld measurements? Start with handheld kits on page 42 and consider adding special clips or tripod options
  - C. Room acoustics? Select an 831C or 831 meter and accessories found on page 46
  - D. Audiometer calibration? See page 47
  - E. Impulsive or high level sound measurement? Look at K821-QPR on page 42
- **Do you need a non-standard microphone** (for very low or high level or to measure in a specific sound field, such as in highly reflecting surroundings)?
- **Will your meter be used indoors or outdoors?**
- **How will you power your meter?**
- **Do you need remote access to the meter functions or to your data?**

● 821 ● 831C ● 831

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Customize or Build to Order 831 Rental Kits

Prices in US\$ per 30-day rental

Model	Meter Compatibility	Size	Type	Noise Floor (dBA)	Low Range Indicator (dBA)	Overload (dBpk)	\$/30 day
377B02	● ● ●	1/2"	Freefield	17.1	26.2	143.5	\$130
377C20	● ●	1/2"	Random	15.3	24.4	143.5	140
377C01*	● ●	1/4"	Freefield	35.7	44.8	172.3	170
377C10*	● ●	1/4"	Pressure	36.3	45.5	178.8	170
377A12*	● ● ●	1/4"	Pressure	37.5	48.6	192.8	190
378A04**	● ●	1/2"	Freefield	6.5	--	80/100**	400

\*Requires ADP0109 1/4 inch microphone to 1/2 inch preamp adaptor  
 \*\*100dB 10Hz – 5000Hz, 80dB for other frequencies. ADP074 and BNC cable required

Preamplifiers

Prices in US\$ per 30-day rental



● ●  
**PRM831** \$120  
 Standard Preamp for 831 and 831C for 1/2 inch mics



●  
**PRM2103** \$280  
 Permanent Outdoor Preamplifier for Model 831 with Remote Calibration Check, humidity reading and heater, for 377B02 pre-polarized microphone. Requires CBL222-08 or CBL222-20.



● ●  
**ADP074** \$70  
 ICP cable adaptor for LD 831 Sound Level Meter (required for 378A04)

●  
**PRM821** \$120  
 Standard Preamp for 821 for 1/2 inch mics

Cabling

Prices in US\$ per 30-day rental

● ● ● **EXCxxx** 5 pin Switchcraft used with 831 and LxT.  
**EXC010** 10 ft (3 m) \$36  
**EXC020** 20 ft (6 m) \$46  
**EXC050** 50 ft (15 m) \$90  
**EXC0100** 100 ft (30 m) \$140

● **CBL222-xx** Extension cable for use with PRM2103 and EPS044. Provides data, control, and power via Anderson Powerpole connectors. 8 and 20 ft lengths available.  
**CBL222-08** 8 ft \$60  
**CBL222-020** 20 ft \$80

● ● **012Axx** BNC-BNC cable for use with 378A04 and ADP074.  
**012A10** 10 ft \$12  
**012A20** 20 ft \$13  
**012A25** 25 ft \$13  
**012A30** 30 ft \$15  
**012A50** 50 ft \$15

Microphone Environmental Protection

Prices in US\$ per 30-day rental



● ● ●  
**KEPS2116** \$180  
 Environmental protection kit for 1/2 in preamplifiers. Includes EPS2116 with windscreen, desiccant and bird spike in custom case with ACC010 monopole and accessories.



● ● ●  
**EPS2116** \$120  
 Environmental protection for 1/2 in preamplifiers. Includes EPS2116 with windscreen and bird spike.

Tripods/Mounting Accessories

Prices in US\$ per 30-day rental



● ● ●  
**TRP001** \$30  
 Tripod with 3-way tilt/pan head for use with microphone mounting clips or outdoor microphone environmental protection kits. May support meter weight.



● ● ●  
**TRP003** \$60  
 Support tripod, maximum height 8ft, used in portable NMS systems. Steel, 20 lb. Use for outdoor unattended monitoring.



● ● ●  
**TRP003-AL** \$60  
 Support tripod, maximum height 8ft, used in portable NMS systems. Aluminum, 10 lb. Use for light duty monitoring projects.



● ● ●  
**ADP034** \$15  
 Larson Davis adaptor used to connect the EPS2116 to the TRP003 tripod.



●  
**ACC010** \$24  
 Monopole for use in systems equipped with SuperClamp mount



● ● ●  
**079A24** \$8  
 Microphone stand to holder adaptor. 5/8"-27 microphone stand adaptor to 1/4"-20 stud.



● ● ●  
**079A29** \$12  
 Swivel head, stand to holder adaptor. 1/4"-20 threaded base, 1/4"-20 stud to mate to mounting clip (supplied separately)



● ● ●  
**079C23** \$20  
 Swivel head, stand to holder adaptor. 1/4"-20 threaded base, 1/4"-20 stud to mate to mounting clip (supplied separately)



● ● ●  
**079B10** \$10  
 Microphone holder for 1/4" array and condenser systems, designed to attach to 1/4"-20 stud.



● ● ●  
**079A11** \$10  
 Mounting clip for 1/2" diameter preamp, 1/4"-20 thread.

● 821 ● 831C ● 831

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Meter Environmental Protection Cases

Prices in US\$ per 30-day rental

- **KEPS048** \$160  
Environmental protection case for SoundExpert® 721 and 821. Includes cable port and ADP116 power distribution block
- ● **EPS042** \$120  
Small environmental enclosure kit with BAT015, (8) D-cell batteries included. Typically provides 5 days of operation for 831C, 9 days of operation for 831 and 15 days for LxT
- ● **EPS044-SLA** \$420  
Noise monitor enclosure for 831A and 831C including CCS051, CCS052, BAT020 35 Ah SLA battery, ACC009, PSA038, CBL224-02, CBL225-01, CBL226-02 & CBL228-03
- ● **EPS037** \$370  
Case on wheels (CCS035) with 100 Ah battery (BAT012) for permanent NMS.

Additional Power Accessories

Prices in US\$ per 30-day rental

- ● **SLP002** \$100  
Portable folding 100 Watt solar panel with integrated stand and carrying case
- ● **CBL143** \$36  
Model 831C or 831 12V power cable for 2 batteries
- ● **PSA029** \$10  
Model 831C or 831 12V power cable for 2 batteries
- **SLP004** \$80  
Solar panel, 30 Watt, for use with SoundExpert® 721/821-based EPS048 and NMS048 systems
- **PSA039** \$66  
AC power supply with North American plug, 20 V, 90 W, with MC-4 connectors for use with EPS044 & NMS044
- ● **KBAT15** \$10  
(4) AA rechargeable batteries. Batteries may be installed in meter.
- ● ● **PSA039** \$60  
AC power supply with North American plug, 15 V, 90 W, with MC4 connector for EPS044
- **PSA045** \$10  
Universal AC power supply with USB-C output connector
- **PSA047** \$34  
Solar Charge Controller for use with 721 or 821, 5A
- **PSA040** \$56  
Battery Charger for SLA batteries with Anderson Powerpole connectors. Output cable length 1 ft (30 cm)

Acoustic Calibration

Prices in US\$ per 30-day rental

	Output (dB)	Freq (Hz)	Opening	1/8" Mic Adaptor	1/4" Mic Adaptor	3/8" Mic Adaptor	1/2" Mic Adaptor	1" Mic Adaptor	Notes	\$/30 days
<b>Larson Davis Handheld Field Calibrators</b>										
<b>CAL1200</b>	94 and 114	1000	1/2"	ADP075*	ADP109	ADP031*	●	-	New in 2025	140
<b>CAL1250</b>	94 and 114	251.2 and 1000	1"	ADP120*	ADP119	ADP121*	ADP118	ADP119	New w/ display and internal barometer	180
<b>CAL200</b>	94 and 114	1000	1/2"	ADP075*	ADP109	ADP031*	●	-	Legacy unit for 1/2"	150
<b>CAL250</b>	114	251.2	1"	-	ADP114	ADP020*	ADP019	●	Legacy unit for 1"	280
<b>GRAS Pistonphones</b>										
<b>42AA</b>	114	250	1"	RA0069*	RA0049*	-	RA0048	RA0023*	per IEC 60942	540
<b>42AC</b>	134	250	1"	RA0069*	RA0049*	-	RA0048	RA0023*	High level, also IEC 60942	700
<b>TMS Lab-Based Systems</b>										
<b>9917C</b>	varies	20 to 10000	1/2"	Comparison calibrators per IEC 61094-5 for condenser and electret microphones				Mid range		contact us
<b>9919C</b>	to 104	20 to 20000	1/2"					High range		contact us
<b>9350C</b>	19 to 162	20 to 95000	Actuator	Condenser mics per IEC 61094-6 and IEC 60942				Calibration workstation		contact us

All CAL and 42 units IEC 60942 Class 1  
 \*Adaptors available to rent at additional cost: All ADP adaptors \$15/mo, all RA adaptors \$60/mo  
 ● Supported without the need for an adaptor

Connectivity

Prices in US\$ per 30-day rental

- **DVX012** \$12  
USB to Ethernet Adaptor
- **DVX013** \$16  
USB to Ethernet dongle, includes 3 port USB hub. Hub requires external 5V power, AC adaptor included.
- **DVX014** \$6 WiFi adaptor supporting 802.11 b/g/n for 831C (D-Link DWA-121)
- **DVX015** \$8  
USB self-powered 2-port hub
- ● **CBL138** \$3  
CABLE USB A to Mini-B 1.8 Meter. Connects 831 to PC, or powers/charges unit when used with PSA029 AC power adaptor
- **COM-RV50-DC-U** \$186  
Sierra Wireless RV50 cellular 4G (XLTE) universal gateway for use in the US and Canada, 12 VDC power, with dual High gain antenna omni 3.2 inches tall, 18-inch cable
- ● **ACC003** \$10  
Headset with microphone boom, 2.5 mm micro-jack. For voice annotation
- **CBL242-03** \$6  
USB-C to USB-C cable, 3 ft. Includes USB-C to USB-A adaptor

Productivity Accessories

Prices in US\$ per 30-day rental



- ● **CCS001-831-4** Free!  
Renting multiple 831 or LxT meters? Request they be put into this multi-case to save on shipping. This rugged case holds 4 meters, mics, preamps, and a calibrator.
- ● **SWW-SLM-G4** SLM utility software, download, translate, print text reports or export to spreadsheet. Free!
- ● **SWW-DNA** Data Navigation and Analysis Software. Navigate through extensive data with measurement organization, reporting, and data post-processing tools. Call
- ● **831-MEM32G** Removable flash memory. \$6
- **X21-SD-8GB** Removable flash memory. \$5

● 821 ● 831C ● 831

Pricing varies per Rental Period. Items on this page have a 7-day minimum Rental Period.

Adaptors and Windscreens

Prices in US\$ per 30-day rental



● ● ●  
**ADP043** \$36  
1/4" Microphone to 1/2" Preamplifier Adaptor.



● ● ●  
**ADP008** \$36  
1" mic to 1/2" preamp adaptor.



● ● ●  
**079A06** \$9  
3-1/2" dia windscreen for 1/2" microphones. *Similar to Larson Davis WS001*  
**079A07** \$9  
3-1/2" dia windscreen for 1/4" microphones.

● ● ●  
**ACO-WS7** \$50  
7-inch Windscreen for 1/2" microphones.  
**ACO-WS7-80T** \$90  
7" Windscreen for 1/2" Microphones (80ppi) Dense-Treated Windscreen



● ● ●  
**ADP005** \$60  
BNC to 1/2" microphone thread adaptor, 18 pF with shorting cap.



● ● ●  
**ADP009** \$24  
1/2" mic to 1/4" preamp adaptor.

Additional Sensors for Meters

Prices in US\$ per 30-day rental



● ●  
**831-GPS** \$40  
Includes Global Positioning information with measurements, for fixed or roving tests. Connects via aux USB input of 831.



● ●  
**SEN031** \$560  
Combined weather sensor: wind speed and direction, temperature, humidity, pressure, rainfall - *requires CBL167 cable + DVX008A*  
*Optional TRP003-WTHR adaptor bar available.*



● ●  
**SEN032** \$400  
Combined Wind speed and direction sensor - requires CBL167 cable + DVX008A  
*Optional TRP003-WTHR adaptor bar available.*

Weather Sensor Accessories

- ● CBL229 Cable for SEN031 and SEN032. Serial port for control and data, Anderson Powerpole connectors to power from EPS044. Connects to Model 831 with DVX008A. \$55
- ● CBL225-01 Fused cable with Anderson to spade connectors \$10
- ● ADP102 Tripod adaptor for SEN031 and SEN032. Includes 24" horizontal bar, heavy duty clamp and 3/4" X 4" PVC \$26
- ● DVX008A USB Adaptor for DBM9 interface \$10

Underwater Measurements

Prices in US\$ per 30-day rental



● ● ●  
**TC4013**  
Teledyne RESON miniature hydrophone, -211 dB ± 3 dB receiving sensitivity, 1 Hz–170 kHz. Various cable lengths available, cable terminates in 2-pin LEMO with BNC adaptor. Used for pile driving, dolphins, general purpose measurements. More information available online.



● ● ●  
**RA0043** \$120  
Pistonphone coupler for TC4013 hydrophone.



● ● ●  
**TL8013** \$60  
Protective cage for TC4013 hydrophone

<b>TC4013</b>	10 ft (6 m)	\$320	<b>TC4013-13</b>	98 ft (30 m)	\$600
<b>TC4013-4</b>	30 ft (10 m)	\$460	<b>TC4013-8</b>	164 ft (50 m)	\$740
<b>TC4013-5</b>	65 ft (20 m)	\$520	<b>TC4013-9</b>	196 ft (60 m)	\$800
<b>TC4013-11</b>	82 ft (25 m)	\$570	<b>TC4013-12</b>	328 ft (100 m)	\$1 100




● ● ●  
**394A40** \$600  
Pistonphone, 114.0 (± 0.08) dB output at 250 (± 0.5 %) Hz, 1/2" opening.

Room Acoustics

Prices in US\$ per 30-day rental



●  
**BAS001** \$580  
Omnidirectional source for Reverberation Time, Room and Building Acoustic Measurements – integrates with 831-RT option to offer easy ISO 3382-2 and ASTM E2235-04 testing.



●  
**BAS002** \$840  
Larson Davis 500 Watt 110-125 BAC power amplifier for BAS001 or BAS003; includes remote control, carrying case. *Includes USB preloaded with arbitrary waveform for signal generation.*



●  
**BAS003** \$400  
Larson Davis Directional speaker source; use with BAS002 power amplifier.



●  
**BAS004** \$1200  
Larson Davis Tapping machine w/ remote control, battery and charger. *Includes soft carrying case. Unit available for short-term rental.*



●  
**BAS006** \$100  
Impulse generating source for building acoustics designed for wide frequency range.



●  
**TRP023** \$20  
Speaker tripod for use with BAS001 or BAS003 speakers.

**Notes** ⚡ BAS002 and BAS004 and shipped for 90–132.5 VAC, 55–65 Hz use with standard North American plug unless otherwise arranged. Each model ships as kit with “-U” suffix to denote North American power configuration.

**Additional** Additional Room Acoustics items are available. Firmware modules for Sound Meters 824 and 831 are shown on SLM pages, other items including DNA analysis software, Bruel & Kjaer Reference Sound Sources Types 4204 and 4205 and more are shown online.

For verification of audiometers quickly and accurately using ANSI S3.6-2010 and IEC 60645. Test virtually every type of transducer: supra-aural, extended range circumaural, bone vibrator, hearing aid, insert earphone and speaker. Automatically correct RETSPLs, perform level and frequency adjustments during audiometer tests, qualify booth ambient noise (MPANL), store and recall tests in databases, and print custom reports.

**Audiometer Systems**

Prices in US\$ per 30-day rental

The following systems offer modern complete audiometer testing: signal distortion, frequency, hearing level, linearity, pulsed signals, speech signals, frequency modulation, narrowband and broadband noise levels, sound booth noise levels, and cross-talk.

<b>KAudCal</b>	AudCal Software and System Controller to run a suite of tests and generate reports. Real-time results displayed on screen vs. standards-defined limits. Retest any failed frequency, level, or function individually during testing. Generate customizable reports with company logo and technician signatures. <i>AudCal is available as a no charge download for your own System Controller for iOS and Android devices on appropriate app stores.</i>	\$260
<b>SYS014</b>	Complete audiometric calibration system for audiometers, includes NBS 9-A Coupler. <i>Includes 831C, 831C-AUD, AEC100, 377A15 1" microphone, ADP008A, CAL250, CCS055 case and related accessories.</i>	2 500
<b>SYS015</b>	Complete audiometric calibration system for audiometers, includes NBS 9-A Coupler and artificial mastoid for systems with bone vibrators. <i>Includes 831C, 831C-AUD, AMC493C, AEC100, 377A15 1" microphone, ADP008A, CAL250, CCS055 case and related accessories.</i>	2 800
<b>SYS016</b>	Complete audiometric calibration system for audiometers, includes IEC 60318-1:2009 Ear Simulator with microphone. <i>Includes 831C, 831C-AUD, AEC201-A, 377A15 1" microphone, ADP008A, CAL250, CCS055 case and related accessories.</i>	2 800
<b>SYS017</b>	Complete audiometric calibration system for audiometers, includes IEC 60318-1:2009 Ear Simulator with microphone and artificial mastoid for systems with bone vibrators. <i>Includes 831C, 831C-AUD, AMC493C, AEC201-A, 377A15 1" microphone, ADP008A, CAL250, CCS055 case and related accessories.</i>	3 000

**Note:** For calibration of any supra-aural headset or circumaural headset, select SYS016 or SYS017, which also supports calibration up to 16 kHz.

**Acoustic Couplers and Ear Simulators**

Prices in US\$ per 30-day rental

Pictures not shown to scale



<b>ACC001</b>	Pillow with support board for AEC100, AEC101, and AEC201.	\$12
<b>ADP010</b>	Audiometer earphone testing adaptor.	30
<b>AEC100</b>	6cc NBS 9A Artificial Ear Coupler with weight and 2-3/4" retaining ring. <i>Rugged artificial ear unit for testing supra-aural earphones including TDH 39, TDH 49, TDH 50, HDA 280, DT-48, and Holmberg 8103. Includes vibration isolation pillow. Microphone not included, 2575 suggested. Calibrator and mastoid not included (CAL250 and AMC493B suggested). Mounting clip for 1/4" diameter preamp, 1/4-20 thread.</i>	340
<b>AEC201-A</b>	IEC 60318 Ear Simulator with Type 1 adaptor, weight, case, 1/2" microphone included. <i>Can be used with both supra-aural and circumaural earphones up to 16000 Hz. Meets IEC 60318-1:2009 Edition 2, IEC 60318-2:1998 and ANSI S3.7 section 5.4 requirements, and is compatible with earphones including TDH 39, TDH 49, TDH 50, HDA200 and Koss HV/1A. Supplied with removable 377B13 microphone, a Type 1 adaptor plate, vibration isolation pillow, weights and accessories in durable case.</i>	760
<b>AEC201-2</b>	Type 2 Adaptor for AEC201-A Artificial Ear. <i>Used when testing earphones such as Koss HV/1A.</i>	40
<b>AEC202</b>	Optional coupler for insert type hearing aids and earphones. 2cc IEC 60126, IEC60318-5 artificial coupler for 1/2 in microphone, compliant to ANSI S3.7. <i>Microphone not included.</i>	200
<b>AEC203</b>	2cc Coupler for 1" microphone. <i>Used for Insert Type Hearing Aids and Earphones including ER-3A and 3A (EAR). Meets IEC60126, IEC60318-5, and ANSI S3.7 (2 cc). Used in BTE (Behind the Ear) applications. Includes acoustic tubing #13 thick. Microphone not included, 2575 suggested. Calibrator not included, CAL250 suggested.</i>	140
<b>AEC206</b>	Headphone Test Fixture for in-ear/on-ear headphone testing, production quality assurance, ear muff testing, and headphone R&D. <i>Ships preassembled and ready-to-use, includes IEC 60318-4 (711) occluded ear simulators with microphones, ICP/IEPE preamplifiers with TEDS, 4 pinnae (2 left and 2 right).</i>	2 200
<b>AEC304</b>	IEC 60711 / IEC 60318-4 Occluded Ear Simulator with 1/2" microphone. <i>For the measurement of earphones coupled to the ear by ear inserts including HV/1A and HDA 200. Meets IEC60318-4, IEC60711:1981. Includes 377A13 1/2" 12.5mV/Pa matched microphone. For ITC (In the Canal), ITE (In the Ear) and RIC (Receiver in Canal) applications. Calibrator not included, CAL250 suggested.</i>	420
<b>AMC493C</b>	Artificial mastoid coupler and additional weight ring. Innovative transducer for bone vibrator testing. <i>This innovative transducer for bone vibrator testing is a precision mechanical coupler used to calibrate bone conduction hearing aids and audiometer bone vibrators. It provides a simple to use design that converts the vibrator force output to an acoustic signal measured with the system's sound level meter. It is used with the AEC100 coupler or AEC201-A Ear Simulator to perform bone vibrator tests.</i>	280

**824 Based AudCal Systems**

<b>K824-AUD</b>	K824 plus AUD audiometry calibration firmware option. Artificial ear, mastoid, and more available separately.	\$1 600
<b>AUDIT</b>	Larson Davis AUDIT audiometer calibration software.	Call

Pricing varies per Rental Period. Items on this page have a 15-day minimum Rental Period.

## Non-Contact Laser Measurement Systems

Prices in US\$ per 30-day rental

## Ometron non-Contact laser measurement systems

**VH3000+** Portable and compact single point laser vibrometer to 25 kHz, and 65µm/s to 425 mm/s velocity range. Working distance from 16 inches to 82 ft without surface treatment. BNC output, AC powered (power supply included). \$4 900

## Polytec non-Contact laser measurement systems

**PDV-100** Portable Digital Single Point Vibrometer, to 22 kHz, low pass and high pass filters available, analog and digital output, velocity resolution 0.05 µm/s/√Hz (20 mm/s/V range), AC powered. \$4 600

**VibroGo** Portable single point digital Laser Vibrometer great for field use. Large bandwidth, up to 100 kHz, and velocity range up to 2 m/s. Can operate on battery power or AC power. Simultaneous Digital and Analog output signals as well as displacement and acceleration output available. Replaces PDV-100. 4 800

**VibroFlex** Modular solution with different sensor head options allowing measurement of tiny structures with microscope optics, to relative motion, to high sensitivity needs. DC to 24 MHz bandwidth (configurable) and up to 30 m/s velocities. Reliable measurement on varying surfaces (dark, oily, shiny, hot). 4 800

**RLV-5500** Rotational Laser Vibrometer for non-contact precision rpm, angular velocity and angular displacement measurements. Measures from 0 to 20,000 rpm. Class 2 low power visible laser. Standoff distance must be specified upon order placement; standoff distances of 70 mm and 400 mm available. 9 600

**PSV-1D** PSV-400 or PSV-500-1D Scanning Vibrometer. Optical non-contact vibration mapping and analysis. Call

**PSV-3D** PSV-400 or PSV-500-3D Scanning Vibrometer. Acquire and analyze vibration in 3D. Call

*Additional non-contact laser systems may be available, including 3D, in-plane, scanning/out of plane, and rotational vibrometers. Please inquire.*

## Rotating Equipment

Prices in US\$ per 30-day rental

**LT2** ICP® Laser Tachometer, BNC output, continuous laser operation, up to 300000 RPM, 20 in (0.5 m) operating range, includes mounting bracket. *New and updated LaserTach product, offers jitter-free operation and operates on any standard ICP current, even 2 mA.* \$200

**PulseDriver** The Modal Shop Magnetic Tachometer Pickup Preamplifier for direct interface to ICP sensor signal conditioners, includes selectable divider circuit. 200

**TSC002** Structural Dynalysis Torsional Signal Conditioner, 2-channel, conditions output from a shaft encoder, mag pickup or Hall Effect sensor for torsional vibration measurements. 900

**TSC004** 4-channel version of TSC002 above. 1 100

## Model 4830B Accelerometer Simulator

Prices in US\$ per 30-day rental

The 4830B accelerometer simulator is a hand held battery operated signal generator designed specifically to simulate the electrical output of common types of accelerometers to troubleshoot, verify and calibrate measurement systems.



- Signals mimic typical voltage, IEPE, and charge mode (single ended and differential)
- Also features a TTL compatible tachometer output for condition monitoring tracking filters to be set without a real time tachometer signal
- Up to 40 simulation profiles can be saved for easy recall
- Features FFT function to analyze a voltage proportional vibration signal to provide an indication of frequency and magnitude
- Signal outputs 1 Hz to 20 kHz with a 0.5 Hz resolution
- Outputs can be configured to be proportional to velocity or displacement

**4830B-CAL** Handheld accelerometer simulator including quickstart guide, Twinax BNC plug, 10-32 to BNC adaptor, power supply, carrying case, USB interface cable \$1 000

## Fastener Testing

Prices in US\$ per 30-day rental

## PCB Piezotronics

**080962-01000** Model 962 Portable Data Recorder for Fastener Testing, Power Tool and Hand Torque Wrench Testing. *Testing Measure, record and report torque, angle and clamp load characteristics of threaded fastener components* \$1 800

**039225-50101/B** Rotary Torque Angle Transducer, 100 lbf-in (11.3 Nm), 1/4-inch Square Drive 740

**039250-50101/B** Rotary Torque Angle Transducer, 100 lbf-ft (136 Nm), 1/2-inch Square Drive 740

**097000-34445** Cable, RS to 10-pin Transducers to mate above to Model 962 150

Pricing varies per Rental Period. Items on this page have a 15-day minimum Rental Period.

**Analyzer Rentals from The Modal Shop** Whether you need a complete turn key DAQ system or just need additional channels for your existing setup The Modal Shop has a number of options. Rent National Instruments or VTI/VXI hardware to expand channel count, or rent entire systems. Crystal Instruments and Siemens offer a small handheld battery powered system from 2-16 channels. Crystal Instruments, Data Physics, m+p, and OROS offer PC-based solutions from 2 to hundreds of channels with the ability to support IEPE and voltage mode sensors or even strain measurements

**Need Extra Support for Your Rental?** For those new to sound or vibration testing, or needing detailed assistance with setup, we can help! Rentals include no charge support for those familiar with analysis but requiring assistance navigating the rental system. Various additional support options are available for rental systems, including web conferencing or phone support to [full on-site test support](#)

**System Controller**

<b>PCSC</b>	A system controller can be added to any DAQ system rental for systems that do not include a controller standard. Useful if there is a compatibility issue or a network administration rights issue on an in house PC	\$380
<b>IPCSC</b>	Ruggedized Durabook system controller can be added to any DAQ system rental for systems that do not include a controller standard. Useful if there is a compatibility issue or a network administration rights issue on an in house PC	490

**Crystal Instruments CoCo Series** ([crystalinstruments.com](http://crystalinstruments.com)) Handheld Data Recorder/Dynamic Signal Analyzer, standalone multichannel portable analyzer, no PC required. 24-bit, 40 kHz bandwidth, up to 150 dB dynamic range, touchscreen, and built-in ICP® power. Data recording and Signal Analysis application software included. 6-hour use on battery, flash memory, single channel 24-bit output, and EDM host PC software. Options for Octave Analysis, Order Tracking, Arbitrary Signal Source, Waterfall, and Spectrogram Display are included with rental units.

<b>CoCo-80X-2</b>	2-channel CoCo-80X system. CoCo-80X features a 7-inch touchscreen and supports CAN-Bus functionality. Includes time recording, transient capture, auto power and cross-power spectra, frequency response, coherence. BNC inputs.	2 840
<b>CoCo-80X-4</b>	4-channel CoCo-80X configuration. Includes capabilities in CoCo-80X-2	3 260
<b>CoCo-80X-8</b>	8-channel CoCo-80X configuration. Includes capabilities in CoCo-80X-2	4 120
<b>CoCo-90X-16</b>	16-channel CoCo-90X system. Includes time recording, transient capture, auto power and cross-power spectra, frequency response, coherence, SMB inputs. BNC adaptor cables provided.	5 900
<b>CoCo-70X-4</b>	Analyzer for Predictive Route-based Condition Monitoring, Maintenance and Quick Analysis. IP-67 rated with a ruggedized chassis and display. Includes Vibration Data Collection Functions including balancing and trending capability.	3 400

**Crystal Instruments Spider-20** Compact Wireless Dynamic Signal Analyzer and Data Recorder. Powerful compact battery powered analyzer provides 4-channels of data recording or analysis in the field with ICP® power built-in and up to 6-hour battery life. 120 dB dynamic range (with 20V input range), up to 256 kHz sample rate / 115.2 kHz real time bandwidth, configurable tach or output channel, BNC inputs, and simple three button control.

<b>Spider-20-4</b>	4-channel Spider-20 system. Includes time recording, real time filters, FRF, octave analysis, order tracking, SRS analysis and more.	2 500
<b>Spider-HUB</b>	Ethernet Switch, allows multiple Spider S20E units to link via Ethernet cable to form a high channel count distributed system with synchronous data acquisition.	520

**Spider-80X** High Channel Count Dynamic Measurement System. Scalable high channel count analyzer system ideal for a wide range of applications from machine condition monitoring to automotive and aerospace applications. Patented technology allows for 150 dB dynamic range, 8 BNC input connectors per 1U 19" rack unit, 2 outputs per card, units can be networked to form up to 512 inputs, voltage or ICP, single-ended or differential, AC or DC coupling, 150 dBFS dynamic functions available. For higher channel count systems please call.

Model / Channels	S80X-P08 / 8	S80X-P16 / 16	S80X-P24 / 24	S80X-P32 / 32	S80X-P40 / 40	S80X-P48 / 48
	\$4500	\$7700	\$10900	\$14100	\$17200	\$20300

**S80X +8** Add 8 channels to S80X-P48 system above, up to 512 channels. \$520

**Spider-80Xi** A compact version of the Spider-80X with a lightweight form factor, great for DAQ or Vibration Control. Each offers 2 output channels.

<b>S80Xi-32</b>	32 Channel system, AC or DC powered, 18 pound full system. Select input cards from below.	9 200
<b>S80Xi-64</b>	64 Channel system, AC powered, 23 pound full system, select input cards from below.	11 600

**Input cards for S80Xi**

<b>Spider-80Hi</b>	8 Channels, ICP or Voltage, BNC inputs, supports TEDS, min 102.4 kHz sample rate.	9 200
<b>Spider-80Ci</b>	8 Channels, ICP, Charge or Voltage, BNC inputs, supports TEDS, min 102.4 kHz sample rate.	11 600
<b>Spider-80Gi</b>	16 Channels, Voltage or Strain Gage for Quarter/Half/Full Bridge, 50-pin DSUB inputs, high sample rate.	9 200
<b>Spider-80SGi</b>	8 Channels, Voltage, DC/MEMS, ICP, or Strain Gage for Quarter/Half/Full Bridge, LEMO, min 102.4 kHz sample rate.	11 600
<b>Spider-80Ti</b>	16 Channels, Temperature 3-wire RTD and K-type thermocouple, 6-pin pluggable terminal block inputs, 2 kHz sample rate.	11 600

**Crystal Instruments Vibration Controllers**

<b>S81B-P02</b>	Crystal Instruments Basic Spider-81B VCS System, 2 inputs: Sine, Random, Shock. Fourth generation system with embedded DSP technology for enhanced control performance, system reliability, and failure protection. Operates in PC-tethered mode or standalone Black Box mode.	\$3 060
<b>S81B-P04</b>	Crystal Instruments Basic Spider-81B VCS System, 4 inputs: Sine, Random, Shock. Fourth generation system with embedded DSP technology for enhanced control performance, system reliability, and failure protection. Operates in PC-tethered mode or standalone Black Box mode.	5 000
<b>S81 VCS</b>	Crystal Instruments Spider-81 VCS System, 8 inputs: Sine, Random, Classic Shock, Transient, SRS, Sine-on-Random, Randomon-Random, and more. Fourth generation system with embedded DSP technology for enhanced control performance, system reliability, and failure protection. Operates in PC-tethered mode or standalone Black Box mode.	Call

Pricing varies per Rental Period. Items on this page have a 15-day minimum Rental Period.

**Crystal Instruments Software**

<b>EDM Modal</b>	Crystal Instruments Modal Testing and Modal Analysis software. Supports Geometry creation/import/export/animation, Operational Deflection Shape analysis, Impact hammer modal testing, Single or multiple shaker modal testing, Single reference modal analysis, Poly-reference modal analysis, and Reporting to Microsoft Word	\$2 500
<b>EDM-03 Post Analyzer</b>	While Full Acquisition and Viewer software is included with each rental, advanced post analysis is available if needed after returning rental hardware, and includes options for viewing data and creating reports (PA Viewer), FFT spectral analysis and 3D signal display functions (PA Basic) or more advanced such as octave filters and order tracking (PA Premium).	\$1 200

**Data Physics DP900 series Analyzers** ([www.dataphysics.com](http://www.dataphysics.com)) Scalable multi-channel front end, 100+ kHz bandwidth, 216 kSa/sec per channel, ICP power with TEDS support (Including ICP Tach Channels), and Stand-alone Operation, up to 6 channels including two reconfigurable channels (input, output, tach) per board with 24 bit analog to digital conversion with up to 150 dB dynamic range, ADC Ranges up to  $\pm 30$  V. DP906 features on-board 500 GB Time-domain Recording SSD, AC power. Additional options and configurations are available: Additional Output Channels, Rotor Dynamics/Turbo Analysis, SRS Analysis, Demodulation, Stepped Sine, MIMO, Human Vibration Filters, Drop/Shock Test, Sine Data Reduction, Balancing, Acoustic Intensity, Event Capture, and shaped PSD or Swept Sine closed loop outputs.

<b>DP901-930A</b>	6-channel DP901 Single-Slot Chassis analyzer with configurable channels (4 Input Channels, 2 Input/Output/Tach Channels), Auto-Power Spectrum, Transfer Function, Synchronous Average, Auto- & Cross-Correlation, Histogram analysis, Frequency Resolution up to 51200 lines, Frame Size up to 131072 samples, Zoom analysis, Time-domain Recording to disk, Waterfall Analysis, Multi-Measurement, Channel and Signal Math, Real Time Octave Analysis, RPM Analysis, and Real-Time Waterfall Based Order Tracking. Up to (2) ICP-Powered Tach Channels available per DP901.	\$4 800
<b>DP901+6CH</b>	Additional 6-Channels of input, up to 36 channels. Consult Factory for pricing over 36 Channels.	1 670
<b>DP906-930B</b>	36-Channel DP906 6-Slot Chassis Analyzer with configurable channels (24 Input Channels, 12 Input/Output/Tach Channels) Call for Software Options.	Call

**Data Physics DP900 Controller** ([www.dataphysics.com](http://www.dataphysics.com)) The 900 hardware's powerful, real time, distributed digital signal processing engine is ideal for closed loop vibration control. Features include: Standalone real time signal processing, Up to 6 channels including two reconfigurable channels (input, output, COLA) per board, Simultaneous recording of time data to on-board storage during measurements, Up to 216 kSamples/s for 80 kHz of alias free bandwidth, 24 bit analog to digital conversion with up to 150 dB dynamic range.

<b>DP901-960A</b>	Data Physics DP901 Closed Loop Vibration Controller, 5 inputs, 1 output with Sine and Random. Includes Channel and Signal Math. (also available as 4 input, 1 output and COLA) **Up to (3) DP901-960B can be combined for additional input Channels (up to 17 Input channels).**	\$4 600
<b>DP901-960B</b>	Add on Classic Shock and SRS to DP901 Controller	1 700
<b>DP901-960C</b>	Add on Time-domain Recording to DP901 Controller. Includes Multi Measurement.	1 700
<b>DP906-960D</b>	Data Physics DP906 Closed Loop Vibration Controller, 35 inputs, 1 output with Sine and Random. Includes Channel and Signal Math. (also available as 34 inputs, 1 output and COLA)	Call

\*\*Notching/Limiting included with Sine or Random option\*\*

\*\*Sine-on-Random, Random-on-Random, Mixed mode, Sine Resonance Search and Dwell, Time Domain Replication, Advanced Notching, Force Limiting, and Larger Channel count Pricing all available on request\*\*

**DEWESoft SIRIUS®** A rugged IP 20 rated, flexible solution for assorted measurements in the field or the lab. In addition to general time domain and FFT capabilities, the acoustic measurement package allows measurement of Narrow band FFT, 1/n octave band, A, B, C weighted, Leq and additional metrics. The structural analysis package provides FRF, coherence and phase for SISO, MIMO, capabilities with modal hammer or shaker as well as order analysis capabilities. Human vibration analysis according to ISOP 8041 and 2631-1 provided too.

<b>SIRIUS 8-2</b>	8-channel system with 8 24-bit high dynamic range voltage/ICP BNC inputs (DC and AC selectable coupling), 2 synchronized counters, and supports CAN 2.0b BUS. Max sampling rate of 200 kHz. Software is included and preinstalled on system controller.	\$5 200
-------------------	---	---------

**Digilent** ([www.digilent.com](http://www.digilent.com))

<b>DT9837A</b>	High Performance USB Data Acquisition. Four 24-bit BNC IEPE (ICP) sensor inputs up to 52.7 kHz sampling rate per channel, AC/DC coupling, 4 mA constant current. One BNC analog waveform output, 24 Bit, 52.7 kHz. One BNC tachometer input. Sync port for synchronizing acquisition on up to 4 modules. Powered via USB connection to PC.	\$640
<b>DT9857E</b>	Sixteen 24-bit BNC IEPE (ICP) sensor inputs up to 105.4 kHz sampling rate per channel, AC/DC coupling, 4 mA constant current. Two BNC analog waveform output, 32 Bit, 216 kHz. One BNC trigger input. Digital I/O, Counter/Timer, Event counter, and tachometer accessible via 25 Pin connector. Ethernet sync ports for synchronizing acquisition on up to 4 modules (no distribution panel needed). Power supply included.	1 860

Pricing varies per Rental Period. Items on this page have a 15-day minimum Rental Period.

**Hi-Techniques** ([www.hi-techniques.com](http://www.hi-techniques.com)) has provided high performance for over 35 years, specializing in transient recorders and data acquisition systems. The Echelon system offers an ideal platform to take high sample rate data for Shock and other fast transient events in the lab or in the field.

**ECHELON System & Aspire™ Software** Echelon series of Data Acquisition Systems combines lab quality input amplifiers and signal conditioning with unparalleled connectivity in a ruggedized IP 67 rated, portable package. The included Aspire software provides realtime setup, display and powerful analysis from any PC or tablet. Combine and view analog data, vehicle bus data, GPS mapping and realtime calculations in a single workspace. LiveCalc offers real-time DSP and post processing.

**Start here**

**HT EM-CPU-XE** System Processor Module for Echelon IP-67 Ruggedized Data Acquisition System. 4 input modules, 2 CAN (1 HT), 16 DIO, and 4 Quadratures. Includes power cabling, industrial SSD, cabling, and Aspire Software. 3 000

**Add modules**

**HT EM-HS-10MA** Four Channel High-Speed Universal Input Module for Echelon System. 4 independent 16-bit, 1 MS/s SAR type digitizers with pre and post-ADC anti-alias filtering, with 10mA IEPE current. Universal inputs support channel by channel direct connections for voltage, bridge, accelerometer and thermocouple measurements. 1 160

**Add appropriate breakout interfaces**

**HT EC-HS-IEPE** Four Channel IEPE BNC Breakout Cable for EM-HS Module. Individual jumpers allow channel by channel switching for DC, AC, or IEPE inputs. 110

**HT EC-HS-SLT** Four Channel Spring Loaded Terminal Breakout Interface for EM-HS module. Supports direct bridge, IEPE, and differential inputs. 130

**Optional GPS**

**HT EP-GPS** Echelon GPS Time Synchronization and Position. Allows all data to be time synchronized between systems. GPS position is also provided with 20 Hz fast update rate. 360

**Keyence NR-Series Scalable DAQ** ([www.keyence.com](http://www.keyence.com)) The Keyence NR Series is a new DAQ for simplified data collection/recording. These can be used for a wide range of measurements, from simple measurement to multi-aspect, multi-channel measurement. The compact size offers flexible testing options. The software is also easy to set up and use right away, even for first-time users. Collected data can be exported with one click. Main unit options offer PC-connected collection or standalone.

**Select a Main Unit**

**NR-500** NR-Series main unit to connect to a PC via USB. Allows up to 8 measurement units to be connected. When using NR-CA04 measurement units, only 20 channels are supported using the NR-500 main unit. NR-U5 AC adaptor and AC cord used for AC power. \$600

**NR-X100W** NR-Series main unit with built-in CPU. Can be used without a PC and data can be saved on the unit. Allows up to 72 measurement units and can be battery operable. When using NR-CA04 measurement units, 180 channels are supported using the NR-X100W main unit. Can power with DC 9 to 36V via terminal block, or add NR-XU1 for AC power, or NR-XU15 kit for battery power. 980

**Select Measurement Units**

Keyence offers many units from Temperature, Voltage, Current, Strain, Pulse, CAN and more. At this time we are focusing on the sound and vibration-focused NR-CA04, but ask if interested in another unit to integrate into a rental system!

**NR-CA04** NR-Series 4-channel acceleration measurement unit. Optimized for voltage-mode and charge-mode piezoelectric accelerometers. (4) BNC inputs for voltage mode ICP-accelerometers, (4) 10-32 inputs for charge-mode PE accelerometers, 100 kS/s/ch, 16 bits, selectable input range, selectable AC/DC coupling. 52

**Software**

Software is not keyed to unit and can be installed on any PC with admin rights, which can be maintained after a rental for data recall in the future.

**NR-XH1W** NR-Series PC software. Includes WAVE LOGGER X, File Viewer X and LAN TOOL X. Offers an easy to understand data collection screen with time/waveform display and FFT, simple customization, simplified data output and data storage and retrieval tools. This is included at no charge with rental of a NR-Series unit. User must have admin rights to install on PC. If not available, consider adding the PCSC rental option below.

**Options**

**NR-XU15** Battery power supply unit including: NR-XB1 Battery, NR-XJ1 Charger, NR-XU1 AC adaptor, and OP-99022 AC Power cord.

**NR-XCP30** Control Panel, allows configuration of acquisition settings and displays data and waveforms without connection to a PC

**m+p SmartOffice** ([www.mpihome.com](http://www.mpihome.com)) Complete solution for noise and vibration measurement, vibration control, and analysis/reporting. The SO Analyzer solution runs on a wide range of measurement front ends, and each are easily scalable to add channels. Options and configurations are available, including ODS, time domain, PSD, FRF measurements, SDOF, MDOF, structural bundle. Can also serve as full featured vibration control system when used with VibPilot and VibRunner hardware. Vibration control options include modes for random with notching/force limiting, random data reduction, sine with notching/force limiting, sine resonance search and dwell, sine data reduction, sine force/displacement/velocity control, shock classical, shock response spectrum (SRS), external pulse, transient capture, sine-on-random (SoR), random-on-random (RoR), sine-on-random-on-random (SoRoR), time domain replication, time history recording to throughout disk.

**m+p SO NI** Smartoffice software to be paired with NI hardware. Includes System controller with software preinstalled. NI modules and chassis rented separately. Call

**m+p SO VibPilot-4** Smartoffice software with VibPilot hardware. 4 channel system, 204.8 kHz max. sampling rate, 24-bit, USB and Ethernet interface, 2 output channels and 2 tachometer channels. System controller included. Ability to synchronize multiple VibPilots units together Call

**m+p SO VibPilot-8** Smartoffice software with VibPilot hardware. 8 channel system, 204.8 kHz max. sampling rate, 24-bit, USB and Ethernet interface, 2 output channels and 2 tachometer channels. System controller included. Ability to synchronize multiple VibPilots units together Call

**VibPilot + 8** Add on 8 channel VibPilot module Call

**m+p SO VibRunner-24\*** Smartoffice software with VibRunner hardware. Configurable with 8-24 input channels, 2-12 source output channels, or 2-12 tacho inputs per VibRunner (max 24 channels between all channel types per VibRunner). System controller included. Call

**VibRunner + 24\*** Add on 24 channel VibRunner module. Call

\*VibRunner configured at TMS

Pricing varies per Rental Period. Items on this page have a 15-day minimum Rental Period.

**Siemens Simcenter SCADAS XS** The Simcenter SCADAS XS (formerly LMS SCADAS XS) is a handheld data acquisition system. It is capable of acquiring dynamic data simultaneously at 50,000 samples per second on up to 12 dynamic voltage/IEPE channels. There is a built-in battery which allows autonomous operation, or data can be acquired with a host PC. Includes GPS able to track speed  $\pm 0.1$  kph) and location (5 updates per second), CAN-bus, and two tachometer channels. Also includes SPDIF for digital binaural head or similar.

**Scadas XS-12** SCADAS XS with 12 ICP/voltage, 2 Tach, GPS, CAN-bus, SPDIF, and headset. 50 kHz sampling. Controlled with included tablet via Testlab Scope App or in standalone mode (data conversion software included). Accessories include USB cable and power adaptor, LEMO to BNC breakout for each voltage/ICP input and tach input, CAN-bu adaptor, GPS antenna, microSD card and carrying case. \$4 800

**National Instruments** ([www.ni.com](http://www.ni.com)) Popular C-series chassis, cards and accessories to expand your existing channel count for vibration, acoustic, and strain testing.

#### cDAQ USB Chassis

**NI cDAQ-9171** NI CompactDAQ 1-Slot USB Chassis. *NI Part 781425-01, rental includes 1m USB Cable with Locking Screw NI Part 198506-01.* \$110

**NI cDAQ-9179** NI CompactDAQ 14-Slot USB Chassis. *NI Part 785065-01, rental includes 2.3m US AC Power Cord NI Part 763000-01 and 2m USB Cable 784387-02, with optional NI Desktop Mounting Kit for 14-slot Chassis 784302-01.* 680

**NI cDAQ-9178** NI CompactDAQ 8-Slot USB Chassis. *NI Part 781156-01, rental includes 2.3m US AC Power Cord NI Part 763000-01 and 1m USB Cable with Locking Screw NI Part 198506-01.* 460

#### cDAQ Ethernet chassis

**NI cDAQ-9181** NI CompactDAQ 1-Slot Ethernet Chassis. *NI Part 781496-01, rental includes 2.3m US AC Power Cord NI Part 763000-01.* \$130

**NI cDAQ-9189** NI CompactDAQ 8-Slot, TSN-Enabled Ethernet CompactDAQ Chassis. *Replaces cDAQ-9188 and designed for distributed sensor measurement system: includes timing, synchronization and data transfer between modules. NI Part 783597-01, rental includes 2.3m US AC Power Cord NI Part 763000-01 and 2m CAT-5E Ethernet Cable NI Part 151733-02, with optional NI 9901 Desktop Mounting Kit 779473-01.* 540

#### Sound and vibration modules

**NI-9230 (BNC)** National Instruments 3-Channel Sound and Vibration Input Module, BNC inputs, software selectable ICP/IEPE and AC/DC coupling, 12.8 kS/s/channel,  $\pm 30$  V (784396-01) \$360

**NI 9234** National Instruments 4-Channel, 51.2 kS/s/channel,  $\pm 5$  V, C Series Sound and Vibration Input Module (NI Part 779680-01) 680

**NI USB-9234** 4-Channel 24-bit dynamic signal acquisition (DSA) module, software selectable ICP/IEPE and AC/DC coupling, 20 kHz bandwidth. *Commonly used with accelerometers. Includes NI 9234 card and cDAQ-9171 1-slot USB chassis.* 400

**NI 9231** National Instruments 8-Channel Sound and Vibration Input Module, 10-32 inputs, software selectable ICP/IEPE and AC/DC coupling, 51.2 kS/s/channel,  $\pm 5$  V (783610-01) 990

**NI 9250** National Instruments 2-Channel Sound and Vibration Input Module, BNC inputs, software selectable ICP/IEPE and AC/DC coupling, 102.4 kS/s/channel,  $\pm 5$  V (783827-01) 400

#### Strain input modules

**NI 9236** 8-Channel 24-bit DSA module for strain/bridge testing, 10 kS/s/channel, 350  $\Omega$  Quarter-Bridge Strain Gage, *NI Part 779994-01, rental includes NI 9965, Backshell for 24 Pos Spring Terminal NI Part 780216-01.* \$640

**NI 9237 (RG-50)** 4-Channel 24-bit DSA module for strain/bridge testing, programmable half- and full-bridge completion with up to 10V internal excitation. RJ50 Connectivity. *NI Part 779521-01, rental includes RJ50 Cables for 9944, 9945, and 9949, 2m (qty 4), NI Part 194612-02. Order with appropriate bridge completion accessory kits below if required.* 600

**NI 9944** Quarter-Bridge Completion Accessories (qty 4), 120  $\Omega$ . *NI Part 194738-01. Used with NI 9237.* 70

**NI 9945** Quarter-Bridge Completion Accessories (qty 4), 350  $\Omega$ . *NI Part 194739-01. Used with NI 9237* 70

**NI 9949** RJ50 to Screw Terminal Blocks (qty 4), used with NI 9237 card. *NI Part 196809-01.* 70

#### Voltage output module

**NI-9263 (Screw Term.)** National Instruments 4-channel Voltage Output Module, Screw Terminal connection,  $\pm 10$  V, 100 kS/s/ch (779012-01) \$180

#### Other inputs

**NI 9212 (mini TC)** National Instruments 8-Channel Temperature Input Module, mini-TC front connection,  $\pm 78$  mV, 95 S/s/ch Simultaneous, Isothermal Terminal Block (785259-01) \$360

**NI 9213** 16-Channel, 75 S/s Aggregate,  $\pm 78$  mV C Series Temperature Input Module. 420

**NI 9216** 8-Channel, 400 S/s Aggregate, 0  $\Omega$  to 400  $\Omega$ , PT100 RTD C Series Temperature Input Module 360

**NI 9229** 4-Channel 24-bit DSA module,  $\pm 60$  V, 50 kS/s/ch, screw terminal input connection, CAT I channel-to-channel isolation. *Commonly used with high voltage devices including traditional tachometers. NI Part 779785-01, rental includes (4) EMI Suppression Ferrite 782801-01.* 380

**NI 9203 (Spring Term.)** National Instruments 8-Channel Current Input Module, Spring Terminal inputs, 200 kS/s,  $\pm 20$  mA (7837831-01) 230

#### NI Software

**NI Flexlogger** FlexLogger software for data logging of mixed signals for NI hardware. Preinstalled on system controller. \$540  
Contact us regarding software options if you are starting a rental test system from the beginning!

Pricing varies per Rental Period. Items on this page have a 15-day minimum Rental Period.

**The Modal Shop**

485B39	2 Channel ICP® sensor signal conditioner. 2 BNC in, USB digital signal output. True plug and play analysis via USB without any cumbersome initial setup. View signals on any Windows, macOS, Android, and iOS devices. <i>Overviewed on Page 23.</i>	\$200
K485B39	Dual Channel Analysis Kit. System includes 485B39 and system controller (choice of form function) with preinstalled time and frequency	560
IV485B39	2-channel, USB-powered, sensor signal conditioner with USB digital output (24-bit A/D). ICP input on channel 1, voltage input on channel 2.	200
V485B39	2-channel, voltage inputs, USB-powered, sensor signal conditioner with USB digital output (24-bit A/D).	200

**Signal.X Technologies** DSA 2.9 is a mixed-signal sound and vibration analysis software tool for routine sound and vibration projects, plus the ability to include strain, torsion, current, temperature and more.

SX DSA	Signal.X Technologies DSA Dynamic Signal Analyzer for sound and vibration analysis, includes Spectrum Analysis, Time/Frequency domain, Impact Testing, Octave Band and more. Supports National Instruments DAQ cards.	\$2 000
--------	---	---------

**SINUS Messtechnik GmbH** ([www.sinus-leipzig.de](http://www.sinus-leipzig.de)) APOLLO is a versatile multichannel sound and vibration analyzer that excels at acoustics-focused projects, meeting SLM and third-octave standards including IEC 60651, IEC 60804, IEC 61260, IEC 61672-1, IEC 651 and IEC 804 standards. Sound level measurements, frequency analysis, acoustic intensity, pass-by noise, building acoustics, and more with easy USB 2.0 interface to a system controller. Either 200 V or 0 V microphones can be used.

APOLLO-4	4-channel acoustic configuration, includes Type 1 SLM, fractional octaves 1/1 - 1/24, FFT, recorder, HVM, Intensity, Sound Power, Architectural Acoustics and Vibration, Order Tracking and more. Select between BNC or LEMO inputs.	\$2 500
APOLLO-11	Complete Acoustic Intensity system includes multi-channel APOLLO analyzer, sound intensity probe, and phase calibrator with system controller.	3 600
AP-BA	Apollo Building acoustics option for measurement of building acoustics, per ISO 140-3, 4, 5, 6, 7, 8, 12; ISO 717-1, 2; ISO 3382; DIN 4109, 4109-10 and ASTM E90, E336, E966, E492, E1007 standards.	500
AP-SI2	Sound Intensity 2, allows sound power determination of noise sources from sound intensity measurements according to ISO 9614 Part 1 (Measurement at discrete points) and Part 2 (Measurement by scanning).	500
AP-SP	Sound Power, allows determination of the sound power by means of the sound pressure method according to ISO 3744-46	500

**Vibrant Technologies** ([www.vibetech.com](http://www.vibetech.com)) **ME'scope VES** software series. Contains state of the art tools for performing: FRF-Based Modal Analysis, Operational Modal Analysis, Vibro-Acoustic Analysis, Dynamics Modeling & Simulation, Structural Dynamics Modification, Experimental FEA. The software is compatible with a variety of hardware platforms.

VT-350	<b>Visual Rapid Test™</b> . Calculate a single-reference set of FRFs from random response data acquired with two uniaxial accelerometers and a 2 channel DAQ using the "slinky" method.	Call
VT-620	<b>Visual ODS</b> . Interactive animated display of Operating Deflection Shapes and Mode Shapes from time or frequency domain data.	Call
VT-420	<b>Visual ODS Pro</b> . Visual ODS plus additional signal processing features (time and frequency analysis, FFT and IFFT, integrate and differentiate, waveform math, Auto and Cross spectrum, PSDs, ODS FRFs, and more)	Call
VT-570	<b>Visual Modal</b> . Visual ODS Pro plus modal features (Single reference SDOF and MDOF modal parameter estimation with FRF synthesis, MAC, CoMAC, and more)	Call
VT-550	<b>Visual Modal Pro</b> . Visual Modal plus Multi-Reference Modal Analysis (Multiple reference modal parameter estimation, Stability diagram, Pole diagram, and more)	Call
Additional	Operational Modal Analysis, Structural Dynamics Modification, Acoustics, FEA Options and more	Call

**VTI Instruments 143X** Legacy Series Digitizer Systems ([www.vtiinstruments.com](http://www.vtiinstruments.com)) (formerly VXI Technologies / Agilent Technologies / Hewlett Packard)

Chassis	C-size Mainframes: <b>E8408A</b> 4-slot: \$500, <b>E1421B</b> 6-slot: \$500, <b>E1401B</b> 13-slot: \$1 200
Interface	Single slot Slot 0 Interface Cards: <b>E8491B</b> FireWire IEEE-1394: \$360, <b>EX2500A</b> Gigabit Ethernet (40 MB/s block transfer rates): \$900
Digitizer Cards	<b>E1432A / VT1432A</b> 16 channel 16-bit 51.2 kSa/s: \$1 600, <b>VT1432B</b> 16 ch 24-bit 102.4 kSa/s: \$1 900, <b>E1433A</b> 8 ch 16-bit 196 kSa/s: \$2 600
Source	<b>E1434A</b> 4-channel 65 kSa/s arbitrary source: \$1 000
Data Disc	2-slot <b>E1562D</b> dual data disk and SCSI-2 interface: \$1 600
Breakout Box	8 BNC input, two VXI output card <b>VT3240A</b> : \$160, ICP/Voltage inputs <b>VT3241A</b> : \$500
Cables	<b>009L05</b> VXI to 4 BNC plugs, 5 ft: \$160, <b>009S08</b> VXI to Agilent VXI connectors, 8 ft: \$140

**VTI Instruments EMX** Series Digitizer Systems ([www.vtiinstruments.com](http://www.vtiinstruments.com))

Chassis	<b>EMX18</b> 18-slot (8 hybrid) 4U with Integrated Gigabit Ethernet LXI Interface	\$2 000
Digitizer Card	<b>EMX-4250</b> 16 Channel, 204.8 kS a/s DSA Digitizer	2 000
Breakout Box	<b>EMX-4016</b> 16 channel breakout box for use with EMX-4250 and 4251, BNC inputs, LED Channel Health Indicator	220
Cable	<b>53-0515-030</b> Breakout Box Cable, 3 m, for EMX-4250. 2 cables per EMX-4250 required for 16 channels.	80





Our name was chosen to combine the science of “modal,” or structural testing, and the full-service attitude of our “shop-like” organization. Our business is dedicated to helping you test, model, and modify the dynamic behavior of structures and processes. We strive to provide the measurement community with a single source for all sound and vibration needs.

In addition to our Rental Program, The Modal Shop specializes in multi-channel sound and vibration sensing systems. Products include modal shakers and stingers, the LaserTach™, Air Ride supports and TEDS Sensor Interface Kits, as well as a host of other measurement accessories.

Complete turnkey accelerometer and precision microphone calibration workstations are available, as are smart sensing systems as applied to part quality including NDT analysis, process monitoring and machinery gauging.

The Modal Shop guarantees Total Customer Satisfaction. If, at any time, for any reason, you are not completely satisfied with any TMS product, TMS will repair, replace, or exchange it at no charge.

---

The Modal Shop is part of a leading sensor manufacturing team of companies. Other sensor brands and technologies include:

**PCB Piezotronics** Piezoelectric, ICP®, charge output, piezoresistive and capacitive accelerometers, microphones, pressure sensors, load cells, torque sensors, and signal conditioners for test, measurement, monitoring and research and development.  
www.pcb.com  
800-828-8840 (in US), 716-684-0001

**Larson Davis** Sound level meter and precision microphones, portable and fixed noise monitoring systems, noise dosimeters, human vibration meters, and report generation software for industrial hygiene applications.  
www.larsondavis.com  
888-258-3222 (in US), 716-926-8243

**IMI Sensors** Vibration sensors, transmitters, switches, instrumentation, and accessories for machinery vibration monitoring and predictive maintenance in harsh industrial environments.  
www.pcb.com/imi-sensors  
800-959-4464 (in US), 716-684-0001

**PCB Load & Torque** High quality, precision load cells, wheel force transducers, torque transducers, telemetry systems, and fastener torque-tension test systems.  
www.pcb.com/loadandtorque  
716-684-0001

**Accumetrics** Accumetrics pioneered the application of advanced digital rotor telemetry techniques to rotating machines. Rotor telemetry is the wireless acquisition of measurement signals from the rotors of rotating machines.  
www.accumetrix.com  
518-393-2200

**Temposonics®** Absolute, non-contact linear position and liquid-level sensors for a variety of industries.  
www.temposonics.com  
800-498-4442 (in US), 919-677-0100

Visit [www.modalshop.com](http://www.modalshop.com)  
to locate your nearest sales office

 **THE MODAL SHOP**  
AN AMPHENOL COMPANY

The Modal Shop, Inc. 10310 Aerohub Boulevard, Cincinnati, OH 45215 USA  
USA Toll-Free 800-860-4867 Phone 513-351-9919 Email [info@modalshop.com](mailto:info@modalshop.com) Web [www.modalshop.com](http://www.modalshop.com)

 If distributed from The Modal Shop, this document is printed with more than 80 % post consumer content on carbon-neutral paper that has been manufactured with wind-generated electricity. Additional copies are available upon request, or feel free to share it with your sound and vibration lovin' coworkers or peers. If outdated, please recycle. **Think globally, act modally.** Thank you!

